



STAINLESS STEEL 22.5 mm PUSHBUTTON ENCLOSURES


TECHNICAL DATA

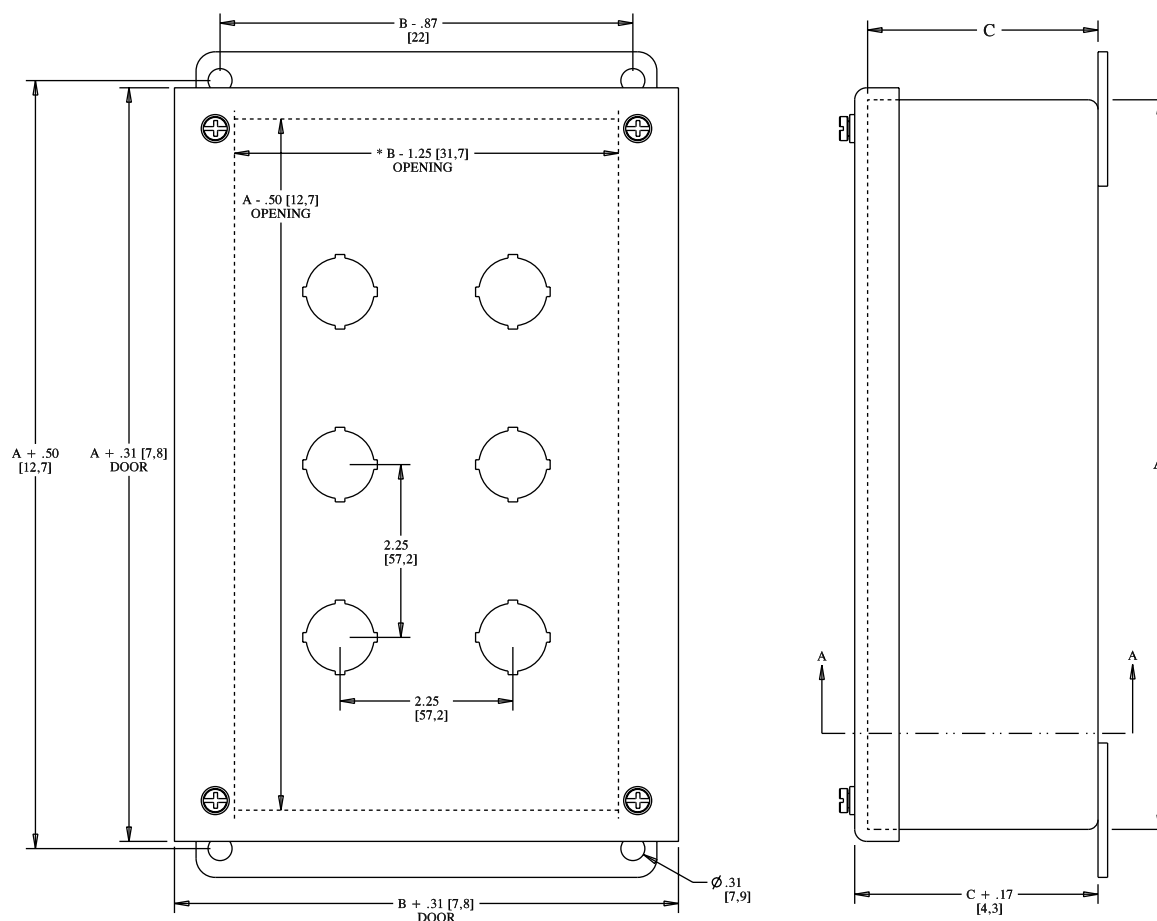

NOTE:
* B - .50 [12,7] ONE COLUMN OF PUSHBUTTONS

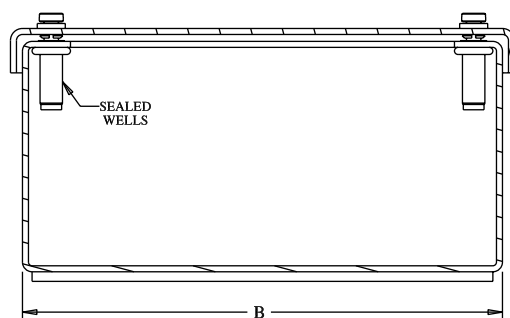

SECTION A-A



STANDARD 4-WAY

Stainless Steel Extra Large 30.5 mm Hinged Pushbutton Enclosures

Application -

Designed to house standard pushbuttons, switches and pilot lights in wet and hosed down areas and in corrosive atmospheres. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Captivated cover screws thread into sealed wells.
- 4-way pushbutton holes accept all brands of oil-tight pushbuttons, switches and pilot lights. Hole diameter 1.20" (30.5 mm).
- Oil-resistant door gasket.
- Provisions for sub-panel.
- Ground stud on door.
- Cover attached with continuous hinge.

Options -

Can be ordered in Type 316/316L stainless steel.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.


IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13

UL Listed Type 4, 4X & 12


CSA Type 4, 4X & 12

IEC 60529 IP66

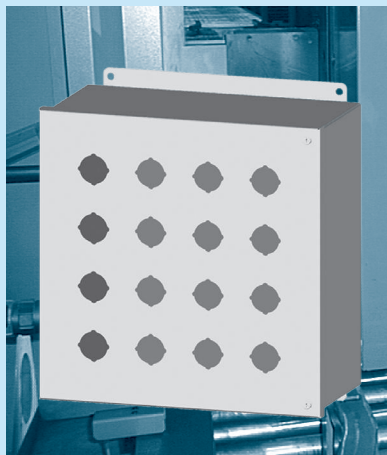


STAINLESS STEEL 30.5 mm EXTRA LARGE HINGED PUSHBUTTON ENCLOSURES

ENCLOSURE PRODUCT CODE S1						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-9PBHSS	10.00	10.00	6.00	IS5	287.73	SCE-10P10	8.75	8.88	6.73
SCE-16PBHSS	12.00	12.00	6.00	IS5	491.20	SCE-12P12	10.75	10.88	9.08



SCE-9PBHSS







SCE-16PBHSS

Phone (989) 799-6871

Fax (989) 799-4524



STAINLESS STEEL EXTRA LARGE 30.5 mm HINGED PUSHBUTTON ENCLOSURES TECHNICAL DATA

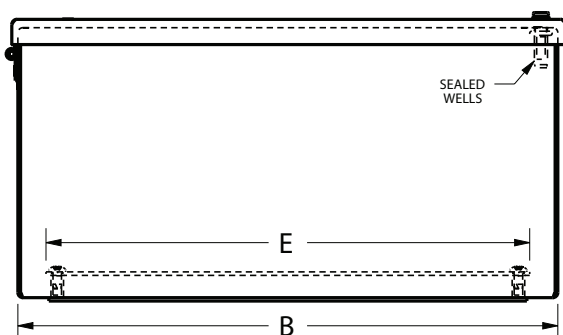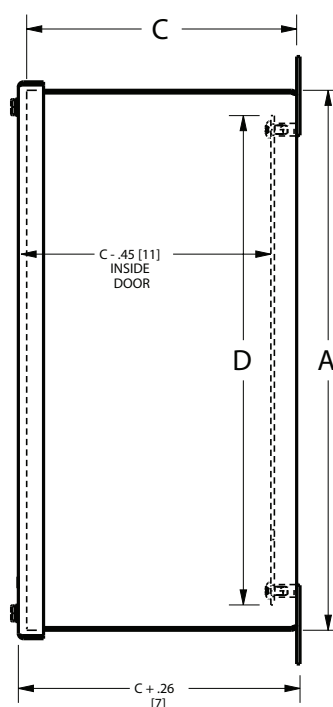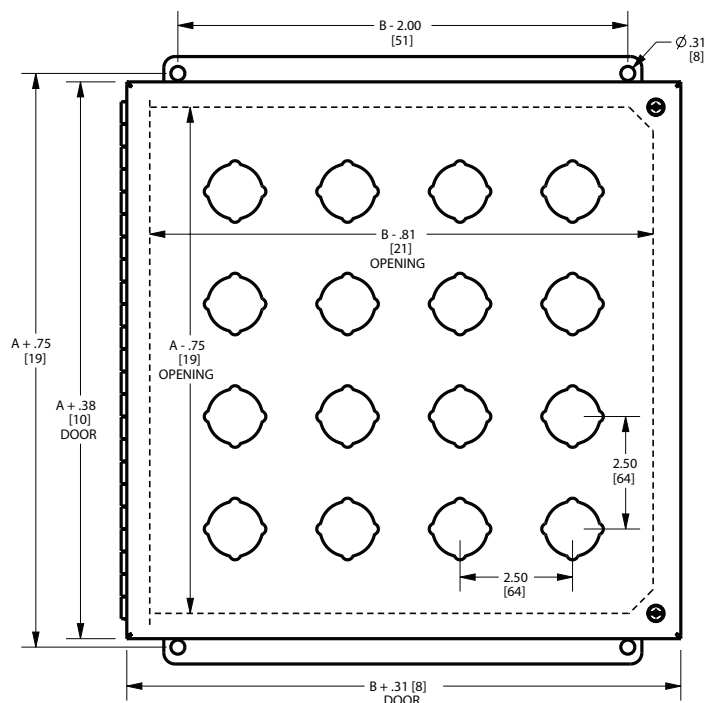

STANDARD 4-WAY

Stainless Steel Extra Large 22.5 mm Hinged Pushbutton Enclosures

Application -

Designed to house standard pushbuttons, switches and pilot lights in wet and hosed down areas and in corrosive atmospheres. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Captivated cover screws thread into sealed wells.
- 4-way pushbutton holes accept all brands of oil-tight pushbuttons, switches and pilot lights. Hole diameter 0.87" (22.5 mm).
- Oil-resistant door gasket.
- Provisions for sub-panel.
- Ground stud on door.
- Cover attached with continuous hinge.

Options -


Can be ordered in Type 316/316L stainless steel.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.


IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

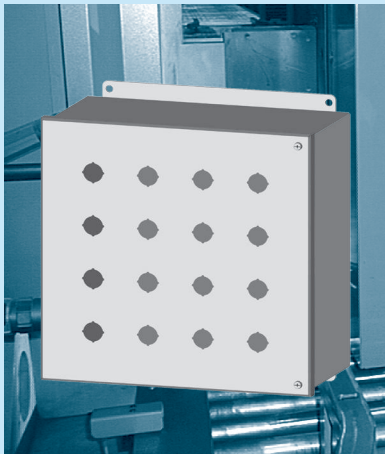


STAINLESS STEEL EXTRA LARGE 22.5 mm HINGED PUSHBUTTON ENCLOSURES

ENCLOSURE PRODUCT CODE S1						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-9PBHSSI	10.00	10.00	6.00	IS5	287.73	SCE-10P10	8.75	8.88	6.73
SCE-16PBHSSI	12.00	12.00	6.00	IS5	491.20	SCE-12P12	10.75	10.88	9.08



SCE-9PBHSSI







SCE-16PBHSSI

Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL EXTRA LARGE 22.5 mm HINGED PUSHBUTTON ENCLOSURES

TECHNICAL DATA

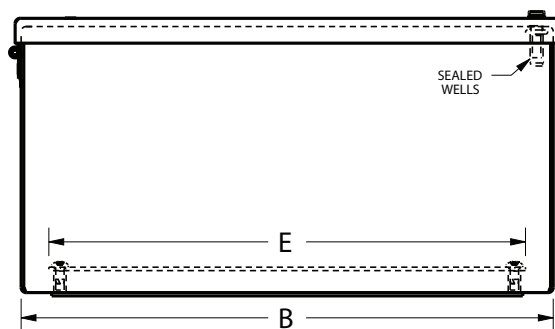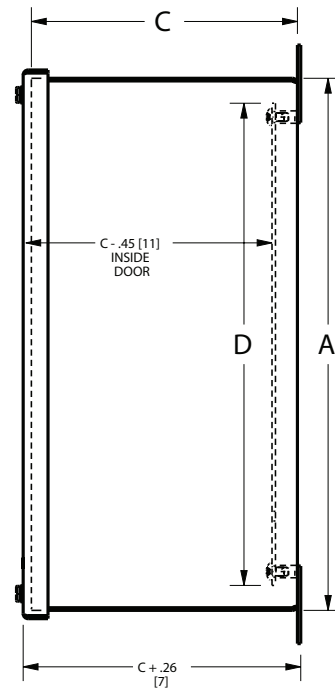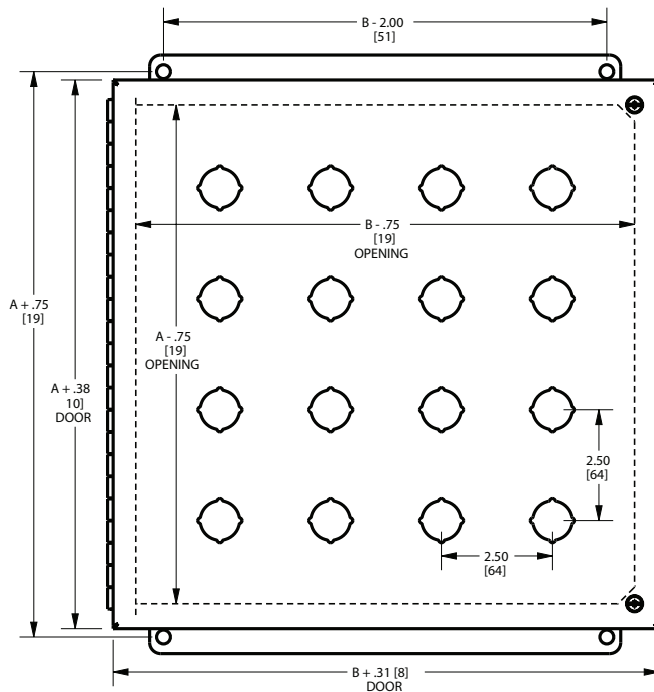

STANDARD 4-WAY

304 & 316 Stainless Steel Enviroline® Series Junction Enclosures

Application -

Designed to house electrical controls, instruments and components in areas, which may be regularly hosed down or are in very wet or oily conditions. Provides protection from dust, dirt, oil, and water. For outdoor application a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Standoffs provided for mounting optional panels.
- Removable hinge.
- Doors open 180 degrees.
- Black mini quarter turn latches.
- Latches are opened or closed with a screwdriver.
- Sealing washers and hole plugs included.
- Ground stud on door & body.
- Mounting feet are included.
- Optional latches available.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -


NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

304 STAINLESS STEEL ENVIROLINE® SERIES JUNCTION ENCLOSURES

ENCLOSURE PRODUCT CODE S6						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-604ELJSS	6.00	4.00	4.00	IS5	135.53	SCE-6P4J	5.00	3.00	3.02
SCE-606ELJSS	6.00	6.00	4.00	IS5	169.40	SCE-6P6J	5.00	5.00	3.62
SCE-806ELJSS	8.00	6.00	4.00	IS5	176.82	SCE-8P6J	7.00	5.00	4.17
SCE-8066ELJSS	8.00	6.00	6.00	IS5	202.17	SCE-8P6J	7.00	5.00	4.17
SCE-1008ELJSS	10.00	8.00	4.00	IS5	260.94	SCE-10P8J	9.00	7.00	5.70
SCE-10086ELJSS	10.00	8.00	6.00	IS5	290.44	SCE-10P8J	9.00	7.00	5.70
SCE-1210ELJSS	12.00	10.00	6.00	IS5	328.93	SCE-12P10J	11.00	9.00	7.72
SCE-12108ELJSS	12.00	10.00	8.00	IS5	352.80	SCE-12P10J	11.00	9.00	7.72
SCE-1212ELJSS	12.00	12.00	6.00	IS5	355.50	SCE-12P12J	11.00	11.00	9.08
SCE-1412ELJSS	14.00	12.00	6.00	IS5	378.21	SCE-14P12J	13.00	11.00	10.13
SCE-14128ELJSS	14.00	12.00	8.00	IS5	400.92	SCE-14P12J	13.00	11.00	10.13
SCE-1614ELJSS	16.00	14.00	6.00	IS5	444.87	SCE-16P14J	15.00	13.00	19.96
SCE-16148ELJSS	16.00	14.00	8.00	IS5	508.38	SCE-16P14J	15.00	13.00	19.96

316 STAINLESS STEEL ENVIROLINE® SERIES JUNCTION ENCLOSURES

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-604ELJSS6	6.00	4.00	4.00	IS5	162.64	SCE-6P4J	5.00	3.00	3.02
SCE-606ELJSS6	6.00	6.00	4.00	IS5	203.28	SCE-6P6J	5.00	5.00	3.62
SCE-806ELJSS6	8.00	6.00	4.00	IS5	212.18	SCE-8P6J	7.00	5.00	4.17
SCE-8066ELJSS6	8.00	6.00	6.00	IS5	242.60	SCE-8P6J	7.00	5.00	4.17
SCE-1008ELJSS6	10.00	8.00	4.00	IS5	313.13	SCE-10P8J	9.00	7.00	5.70
SCE-10086ELJSS6	10.00	8.00	6.00	IS5	348.53	SCE-10P8J	9.00	7.00	5.70
SCE-1210ELJSS6	12.00	10.00	6.00	IS5	394.72	SCE-12P10J	11.00	9.00	7.72
SCE-12108ELJSS6	12.00	10.00	8.00	IS5	423.36	SCE-12P10J	11.00	9.00	7.72
SCE-1212ELJSS6	12.00	12.00	6.00	IS5	426.60	SCE-12P12J	11.00	11.00	9.08
SCE-1412ELJSS6	14.00	12.00	6.00	IS5	453.85	SCE-14P12J	13.00	11.00	10.13
SCE-14128ELJSS6	14.00	12.00	8.00	IS5	481.10	SCE-14P12J	13.00	11.00	10.13
SCE-1614ELJSS6	16.00	14.00	6.00	IS5	533.84	SCE-16P14J	15.00	13.00	19.96
SCE-16148ELJSS6	16.00	14.00	8.00	IS5	610.06	SCE-16P14J	15.00	13.00	19.96

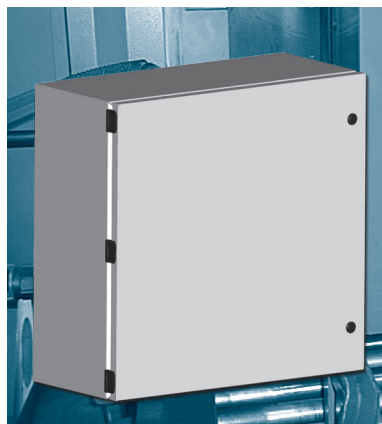

Available within 10 working days if not in stock


Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES

JUNCTION ENCLOSURES

TECHNICAL DATA

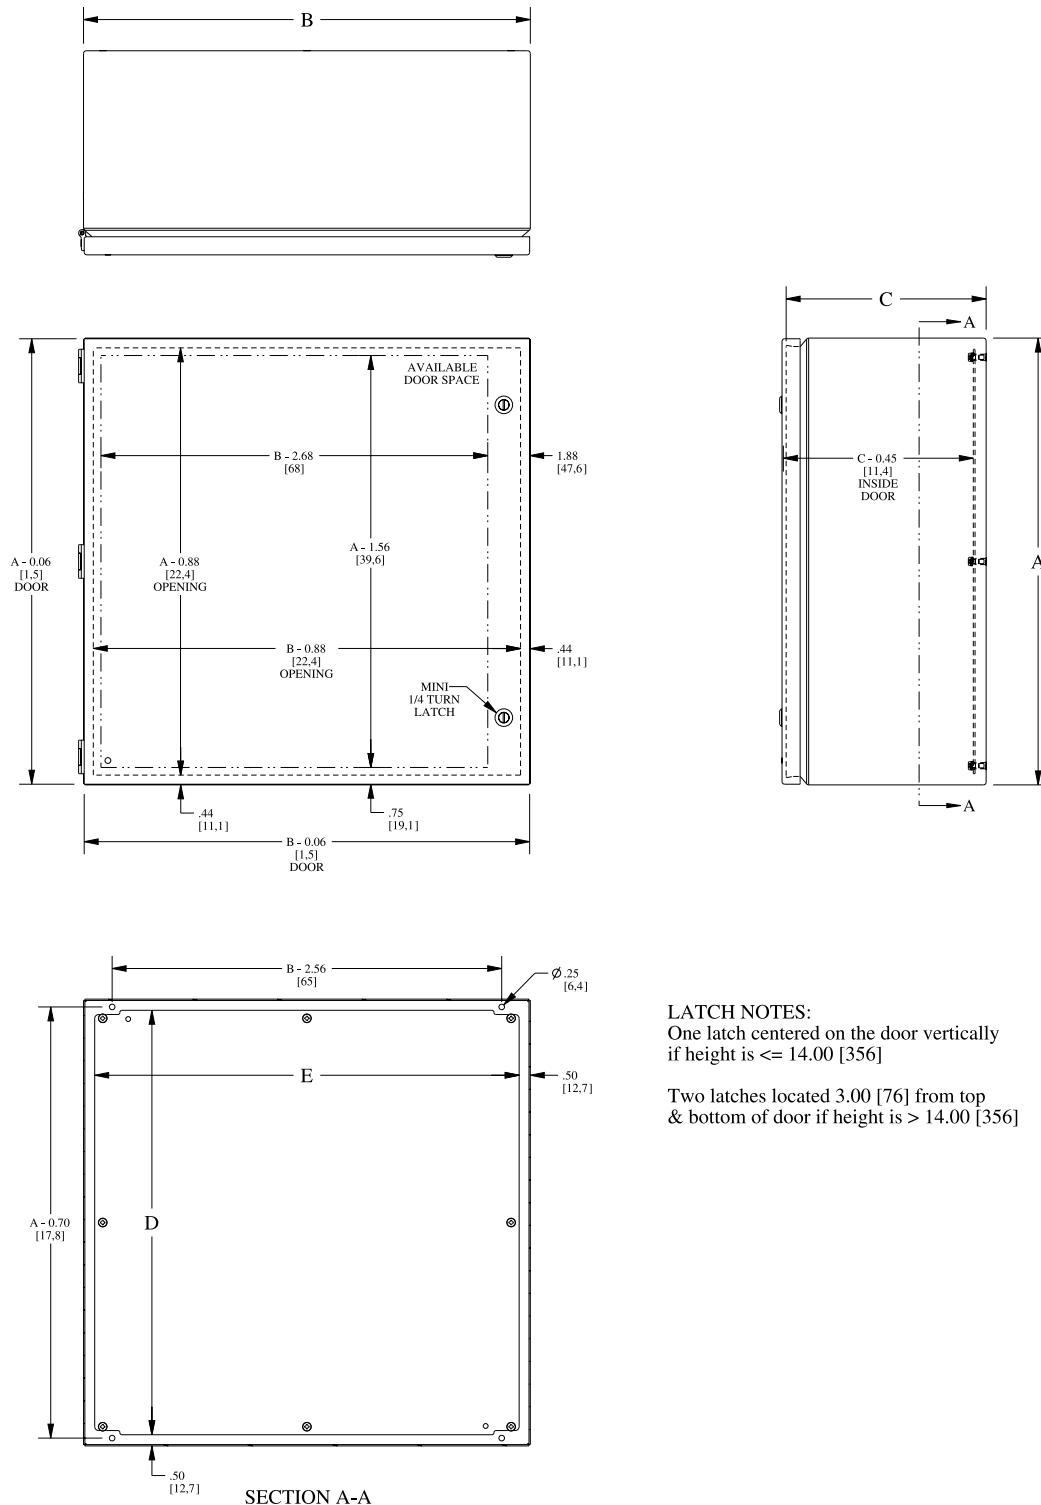**LATCH NOTES:**

One latch centered on the door vertically
if height is ≤ 14.00 [356]

Two latches located 3.00 [76] from top
& bottom of door if height is > 14.00 [356]

304 & 316 Stainless Steel Enviroline® Series Junction Enclosures with Viewing Window

Application -

Designed to house electrical controls, instruments and components that require unrestricted viewing of the gages or controls, in areas, which may be regularly hosed down or are in very wet or oily conditions. Provides protection from dust, dirt, oil, and water. For outdoor application a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- 0.25" polycarbonate viewing window.
- Standoffs provided for mounting optional panels.
- Removable hinge.
- Doors open 180 degrees.
- Black mini quarter turn latches.
- Latches are opened or closed with a screwdriver.
- Sealing washers and hole plugs included.
- Ground stud on door & body.
- Mounting feet are included.
- Optional latches available.

Finish -

#4 brushed finish on all exterior surfaces. Optional panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

304 Stainless Steel Enviroline® Series Junction Enclosures with Viewing Window

ENCLOSURE PRODUCT CODE S6							SUB-PANEL (P3)	
Catalog No.	Height (A)	Width (B)	Depth (C)	Window Viewing Size	Industry Standard	List Price	Catalog No.	List Price
SCE-1008ELJWSS	10.00	8.00	4.00	6.00 x 3.375	IS5	359.33	SCE-10P8J	5.70
SCE-10086ELJWSS	10.00	8.00	6.00	6.00 x 3.375	IS5	378.97	SCE-10P8J	5.70
SCE-1210ELJWSS	12.00	10.00	6.00	8.00 x 5.375	IS5	418.25	SCE-12P10J	7.72
SCE-12108ELJWSS	12.00	10.00	8.00	8.00 x 5.375	IS5	432.12	SCE-12P10J	7.72
SCE-1614ELJWSS	16.00	14.00	6.00	12.00 x 9.375	IS5	563.84	SCE-16P14J	19.96
SCE-16148ELJWSS	16.00	14.00	8.00	12.00 x 9.375	IS5	597.34	SCE-16P14J	19.96

316 Stainless Steel Enviroline® Series Junction Enclosures with Viewing Window

ENCLOSURE PRODUCT CODE S7							SUB-PANEL (P3)	
Catalog No.	Height (A)	Width (B)	Depth (C)	Window Viewing Size	Industry Standard	List Price	Catalog No.	List Price
SCE-1008ELJWSS6	10.00	8.00	4.00	6.00 x 3.375	IS5	431.20	SCE-10P8J	5.70
SCE-10086ELJWSS6	10.00	8.00	6.00	6.00 x 3.375	IS5	454.77	SCE-10P8J	5.70
SCE-1210ELJWSS6	12.00	10.00	6.00	8.00 x 5.375	IS5	501.91	SCE-12P10J	7.72
SCE-12108ELJWSS6	12.00	10.00	8.00	8.00 x 5.375	IS5	518.54	SCE-12P10J	7.72
SCE-1614ELJWSS6	16.00	14.00	6.00	12.00 x 9.375	IS5	676.60	SCE-16P14J	19.96
SCE-16148ELJWSS6	16.00	14.00	8.00	12.00 X 9.375	IS5	716.81	SCE-16P14J	19.96

Available within 10 working days if not in stock




Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES JUNCTION ENCLOSURES WITH VIEWING WINDOW

TECHNICAL DATA

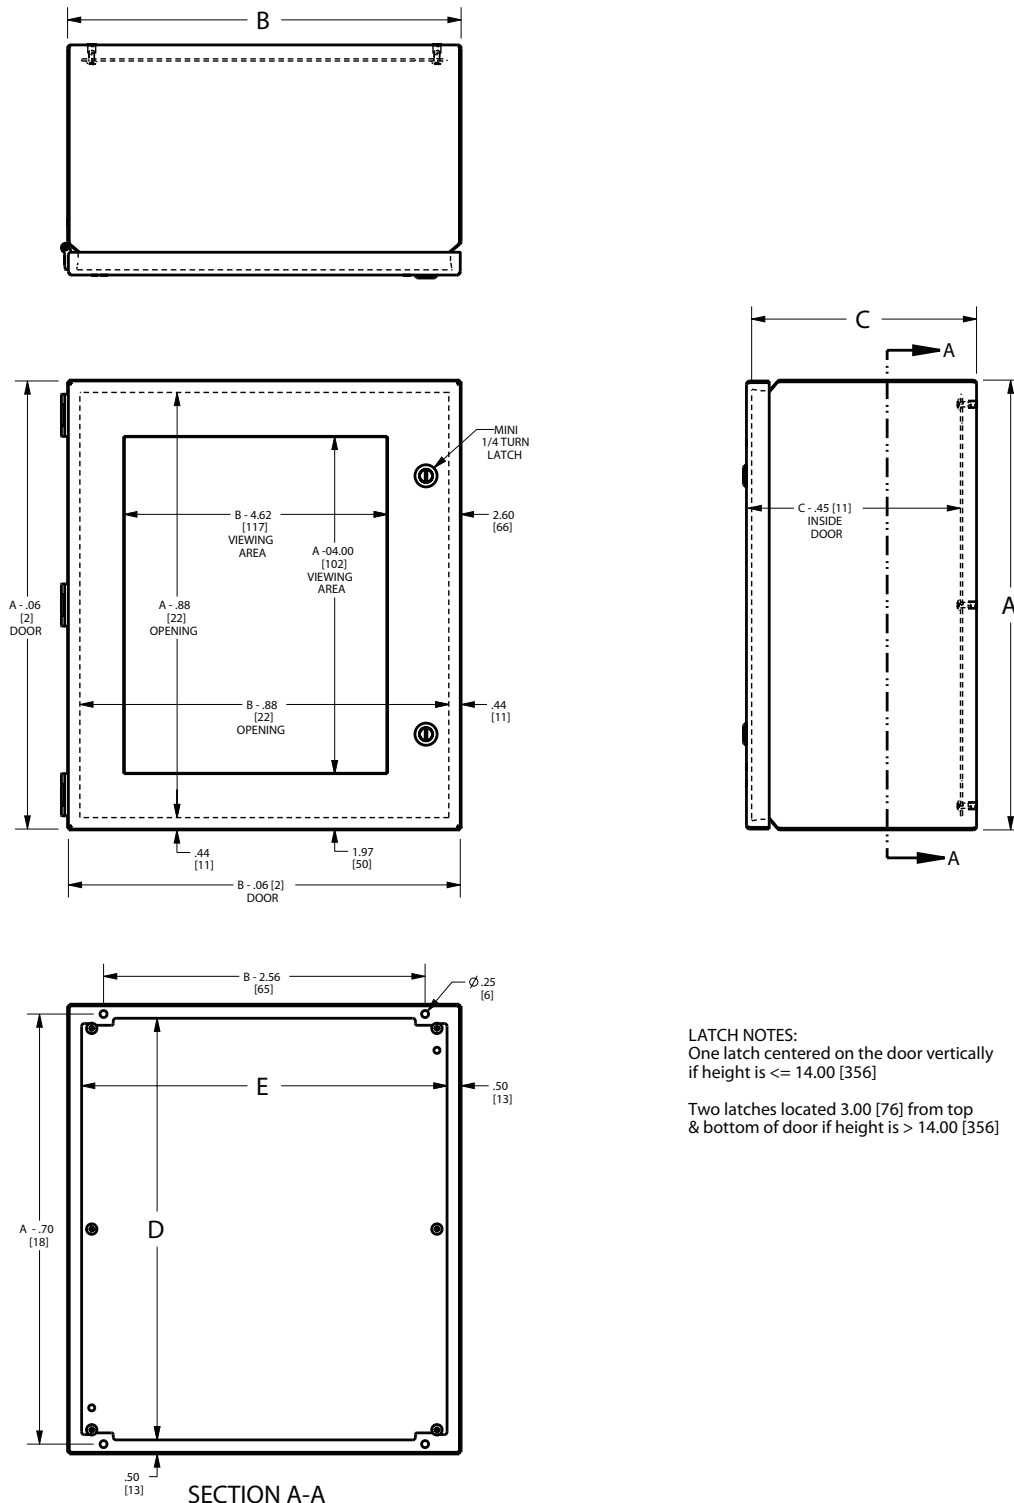

LATCH NOTES:
One latch centered on the door vertically
if height is ≤ 14.00 [356]

Two latches located 3.00 [76] from top
& bottom of door if height is > 14.00 [356]

Enviroline® Series Trough Junction Enclosures

Application -

Designed to house electrical controls, instruments and components used in an indoor or outdoor environment to provide a degree of protection for the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); and provide a degree of protection with respect to the harmful effects on the equipment due to the ingress of water (rain, sleet, snow). For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Standoffs provided for mounting optional sub-panels.
- Removable hinges.
- Doors open 180 degrees.
- Black mini quarter turn latches.
- Latches are opened or closed with a screwdriver.
- Sealing washers and hole plugs included.
- Ground stud on door and body.
- Mounting holes in back for optional mounting feet included.
- Padlocking or keylocking latches, and tamper-resistant hardware is available.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.


IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

STAINLESS STEEL ENVIROLINE® SERIES TROUGH JUNCTION ENCLOSURES

ENCLOSURE PRODUCT CODE E1						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-L9126ELJSS	9.00	12.00	6.00	IS5	646.71	SCE-9P12L	8.00	11.00	18.86
SCE-L9186ELJSS	9.00	18.00	6.00	IS5	718.82	SCE-9P18L	8.00	17.00	26.63
SCE-L9246ELJSS	9.00	24.00	6.00	IS5	724.61	SCE-9P24L	8.00	23.00	29.14
SCE-L9306ELJSS	9.00	30.00	6.00	IS5	786.43	SCE-9P30L	8.00	29.00	31.92
SCE-L9366ELJSS	9.00	36.00	6.00	IS5	844.61	SCE-9P36L	8.00	35.00	34.97



Available within 10 working days if not in stock

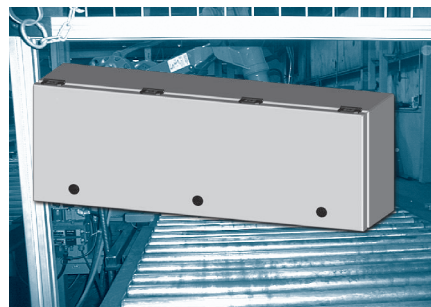

Phone (989) 799-6871
Fax (989) 799-4524




STAINLESS STEEL ENVIROLINE® SERIES TROUGH JUNCTION ENCLOSURES TECHNICAL DATA

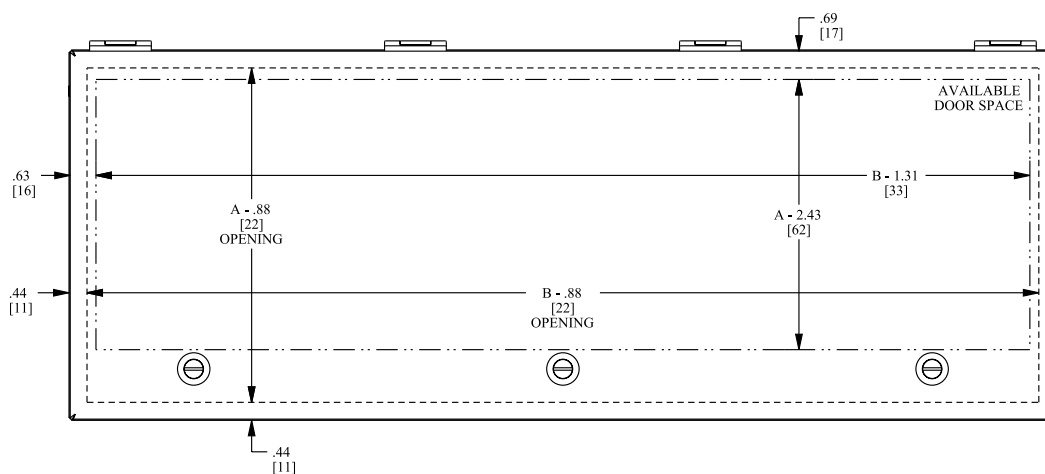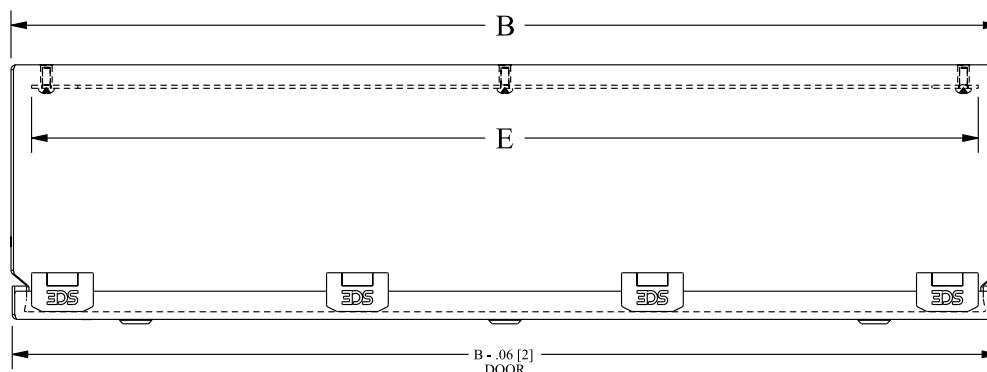

LATCH NOTES:

1. One latch centered on the door horizontally if width is ≤ 14.00 [356]
2. Two latches located 3.00 [76] from sides of door if width is > 14.00 [356]
3. An additional latch is centered horizontally if width is > 20.00 [508]

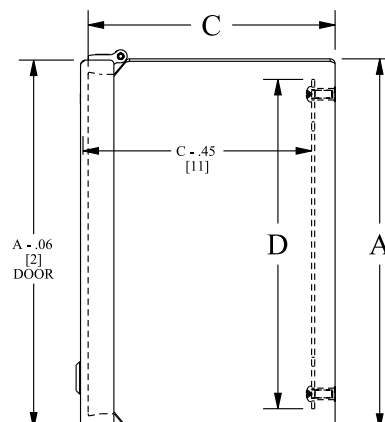

Stainless Steel EnviroLine® Series Trough Junction Enclosures with Viewing Window

Application -

Designed to house electrical controls, drives, instruments and components used in an indoor or outdoor environment to provide a degree of protection for the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); and provide a degree of protection with respect to the harmful effects on the equipment due to the ingress of water (rain, sleet, snow). For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Large viewing windows.
- Oil-resistant gasket.
- Standoffs provided for mounting optional sub-panels.
- Removable hinges.
- Doors open 180 degrees.
- Black mini quarter turn latches.
- Latches are opened or closed with a screwdriver.
- Sealing washers and hole plugs included.
- Ground stud on door and body.
- Mounting holes in back.
- Mounting feet included.
- Padlocking or keylocking latches, and tamper-resistant hardware is available.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.


IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

STAINLESS STEEL ENVIROLINE® SERIES TROUGH JUNCTION ENCLOSURES WITH VIEWING WINDOW

ENCLOSURE PRODUCT CODE S6						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-L9126ELJWSS	9.00	12.00	6.00	IS5	933.54	SCE-9P12L	8.00	11.00	18.86
SCE-L9186ELJWSS	9.00	18.00	6.00	IS5	942.86	SCE-9P18L	8.00	17.00	26.63
SCE-L9246ELJWSS	9.00	24.00	6.00	IS5	1,028.89	SCE-9P24L	8.00	23.00	29.14
SCE-L9306ELJWSS	9.00	30.00	6.00	IS5	1,039.07	SCE-9P30L	8.00	29.00	31.92
SCE-L9366ELJWSS	9.00	36.00	6.00	IS5	1,049.68	SCE-9P36L	8.00	35.00	34.97

Available within 10 working days if not in stock

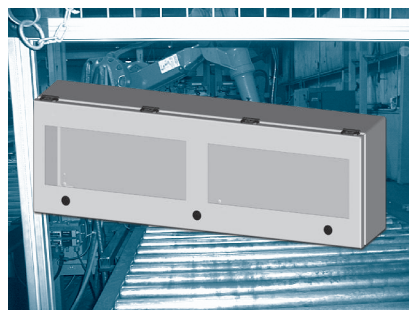


Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES TROUGH JUNCTION ENCLOSURES WITH VIEWING WINDOW

TECHNICAL DATA

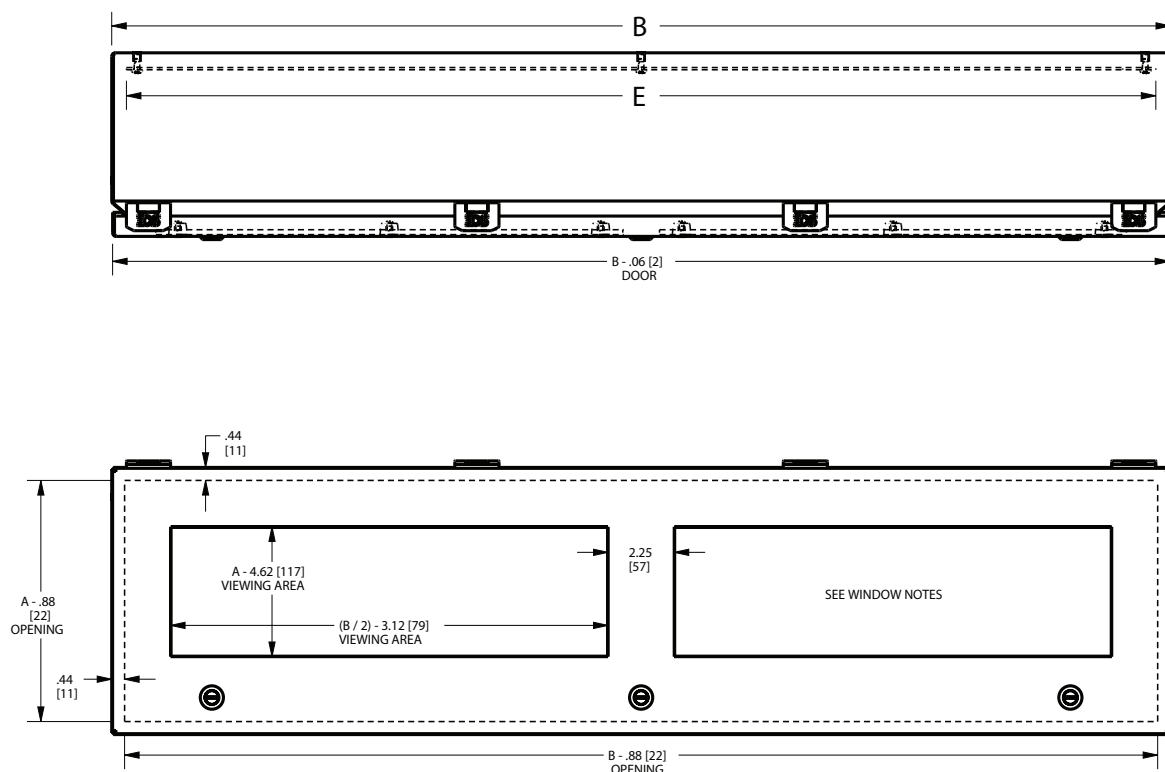**LATCH NOTES:**

One latch centered on door horizontally
if width is ≤ 14.00 [356]


Two latches located 3.00 [76] from sides of
door if width is > 14.00 [356]

An Additional latch is centered horizontally
if width is > 20.00 [508]

WINDOW NOTES:

Door has a single window when viewing area
width is ≤ 16.00 [406]

Door has two windows if viewing area width
would be > 16.00 for a single window.

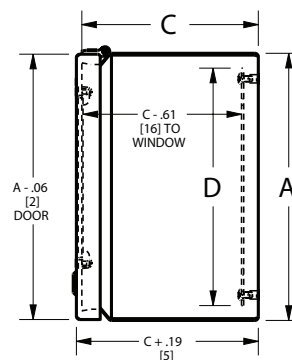

304 & 316 Stainless Steel Continuous Hinge Enclosures

Application -

Designed for use as electrical junction boxes, terminal wiring boxes, instrument housings, and electrical control enclosures. For use in wet and hosed down areas and in corrosive atmospheres. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 304 & 316/316L
- Seams continuously welded and ground smooth.
- Oil-resistant door gasket.
- Ground stud on door.
- Stainless steel continuous hinge.
- Standoffs provided for mounting optional sub-panels.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66



304 STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

ENCLOSURE PRODUCT CODE S1						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-6044CHNFSS	6.00	4.00	4.00	IS5	176.45	SCE-6P4	4.88	2.88	3.01
SCE-606CHNFSS	6.00	6.00	4.00	IS5	220.89	SCE-6P6	4.88	4.88	3.61
SCE-8064CHNFSS	8.00	6.00	4.00	IS5	229.90	SCE-8P6	6.75	4.88	4.17
SCE-1008CHNFSS	10.00	8.00	4.00	IS5	332.84	SCE-10P8	8.75	6.88	5.70
SCE-10086CHNFSS	10.00	8.00	6.00	IS5	364.04	SCE-10P8	8.75	6.88	5.70
SCE-12106CHNFSS	12.00	10.00	6.00	IS5	411.42	SCE-12P10	10.75	8.88	7.72
SCE-12108CHNFSS	12.00	10.00	8.00	IS5	438.43	SCE-12P10	10.75	8.88	7.72
SCE-1212CHNFSS	12.00	12.00	6.00	IS5	440.78	SCE-12P12	10.75	10.88	9.08
SCE-1412CHNFSS	14.00	12.00	6.00	IS5	465.15	SCE-14P12	12.75	10.88	10.13
SCE-1614CHNFSS	16.00	14.00	6.00	IS5	548.38	SCE-16P14	14.75	12.88	19.95

316 STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-6044CHNFSS6	6.00	4.00	4.00	IS5	211.74	SCE-6P4	4.88	2.88	3.01
SCE-606CHNFSS6	6.00	6.00	4.00	IS5	241.06	SCE-6P6	4.88	4.88	3.61
SCE-8064CHNFSS6	8.00	6.00	4.00	IS5	263.88	SCE-8P6	6.75	4.88	4.17
SCE-1008CHNFSS6	10.00	8.00	4.00	IS5	389.42	SCE-10P8	8.75	6.88	5.70
SCE-10086CHNFSS6	10.00	8.00	6.00	IS5	425.88	SCE-10P8	8.75	6.88	5.70
SCE-12106CHNFSS6	12.00	10.00	6.00	IS5	457.71	SCE-12P10	10.75	8.88	7.72
SCE-12108CHNFSS6	12.00	10.00	8.00	IS5	526.12	SCE-12P10	10.75	8.88	7.72
SCE-1212CHNFSS6	12.00	12.00	6.00	IS5	504.94	SCE-12P12	10.75	10.88	9.08
SCE-1412CHNFSS6	14.00	12.00	6.00	IS5	552.19	SCE-14P12	12.75	10.88	10.13
SCE-1614CHNFSS6	16.00	14.00	6.00	IS5	658.05	SCE-16P14	14.75	12.88	19.95




Available within 10 working days if not in stock

Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

TECHNICAL DATA

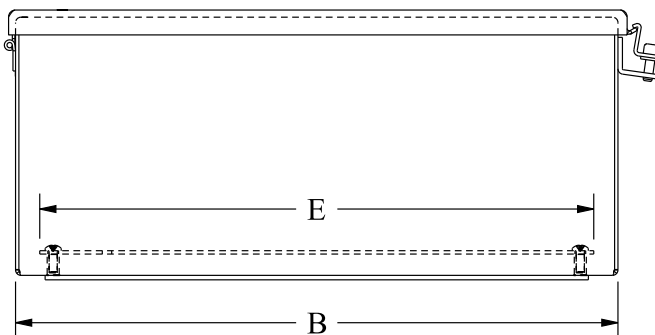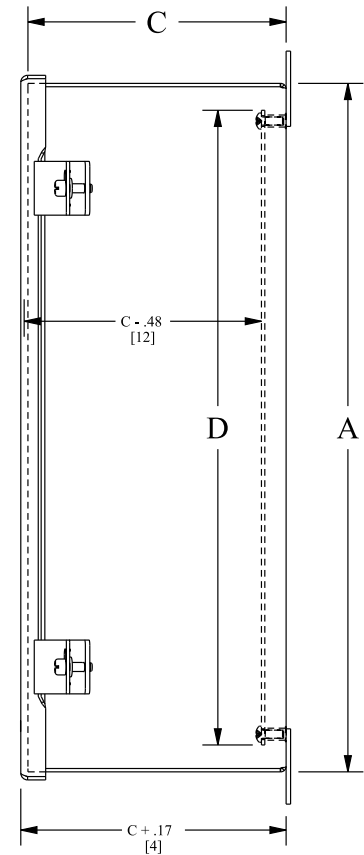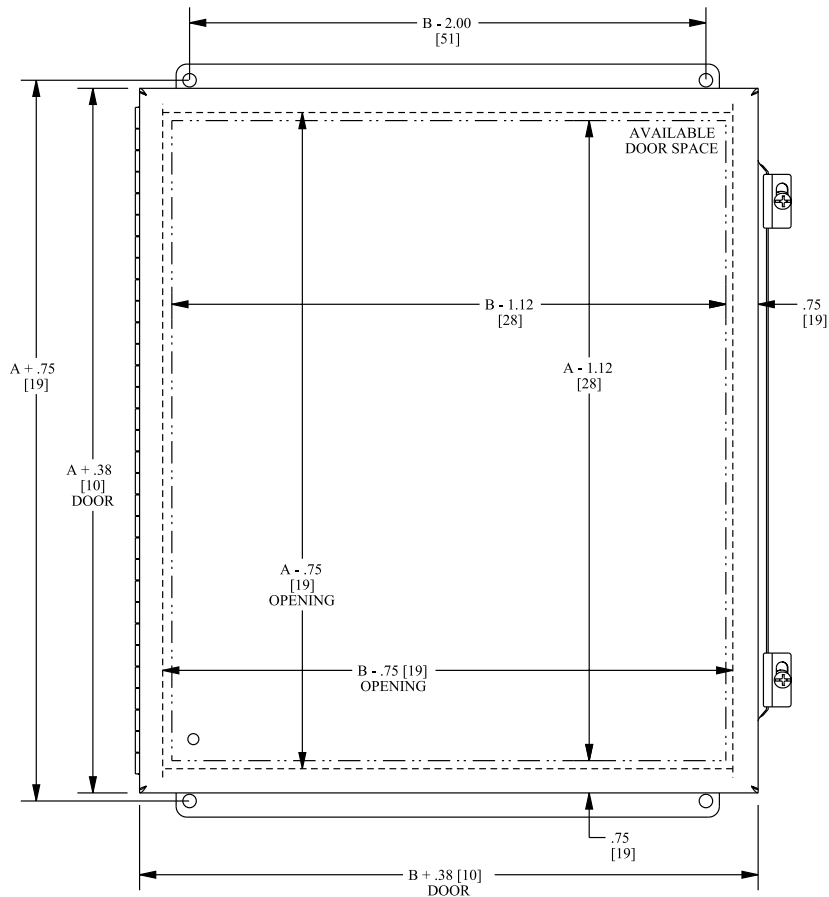

NOTE:
SUB-PANEL MUST BE ORDERED SEPARATELY

CLAMPING NOTE:
ENCLOSURES < 10.00 [254] IN HEIGHT REQUIRE
3 CLAMPS ON DOOR.

Stainless Steel EnviroLine® Series Wall-Mount Enclosures with 3-Point Hardware

Application -

Designed to house electrical and electronic controls, instrumentation and components in indoor or outdoor locations. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Collar studs provided for mounting optional sub-panels.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Stainless steel concealed hinges.
- Removable and interchangeable doors.
- Black zinc die cast keylocking/padlocking handles.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Removable print pocket.
- Oil and water resistant gasket.
- Ground stud on door and body.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

304 STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT ENCLOSURES WITH 3-POINT HARDWARE

ENCLOSURE PRODUCT CODE S9						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-24EL2010SSLPPL	24.00	20.00	10.00	IS6	1,119.15	SCE-24P20	21.00	17.00	45.57
SCE-24EL2410SSLPPL	24.00	24.00	10.00	IS6	1,218.22	SCE-24P24	21.00	21.00	53.18
SCE-30EL2412SSLPPL	30.00	24.00	12.00	IS5	1,454.07	SCE-30P24	27.00	21.00	63.29
SCE-30EL3012SSLPPL	30.00	30.00	12.00	IS6	1,630.53	SCE-30P30	27.00	27.00	83.55
SCE-36EL2412SSLPPL	36.00	24.00	12.00	IS5	1,611.48	SCE-36P24	33.00	21.00	75.96
SCE-36EL3012SSLPPL	36.00	30.00	12.00	IS6	1,829.72	SCE-36P30	33.00	27.00	101.27
SCE-42EL3612SSLPPL	42.00	36.00	12.00	IS6	2,227.75	SCE-42P36	39.00	33.00	136.72
SCE-48EL3612SSLPPL	48.00	36.00	12.00	IS6	2,458.17	SCE-48P36	45.00	33.00	154.46
SCE-60EL3612SSLPPL	60.00	36.00	12.00	IS6	2,881.32	SCE-60P36	57.00	33.00	189.89

316 STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT ENCLOSURES WITH 3-POINT HARDWARE

ENCLOSURE PRODUCT CODE S9						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-24EL2010SS6LPPL	24.00	20.00	10.00	IS5	1,342.98	SCE-24P20	21.00	17.00	45.57
SCE-24EL2410SS6LPPL	24.00	24.00	10.00	IS5	1,461.86	SCE-24P24	21.00	21.00	53.18
SCE-30EL2412SS6LPPL	30.00	24.00	12.00	IS5	1,744.88	SCE-30P24	27.00	21.00	63.29
SCE-30EL3012SS6LPPL	30.00	30.00	12.00	IS5	1,956.64	SCE-30P30	27.00	27.00	83.55
SCE-36EL2412SS6LPPL	36.00	24.00	12.00	IS5	1,933.78	SCE-36P24	33.00	21.00	75.96
SCE-36EL3012SS6LPPL	36.00	30.00	12.00	IS5	2,195.66	SCE-36P30	33.00	27.00	101.27
SCE-42EL3612SS6LPPL	42.00	36.00	12.00	IS5	2,673.30	SCE-42P36	39.00	33.00	136.72
SCE-48EL3612SS6LPPL	48.00	36.00	12.00	IS5	2,949.80	SCE-48P36	45.00	33.00	154.46
SCE-60EL3612SS6LPPL	60.00	36.00	12.00	IS5	3,457.58	SCE-60P36	57.00	33.00	189.89






Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT ENCLOSURES WITH 3-POINT HARDWARE

TECHNICAL DATA

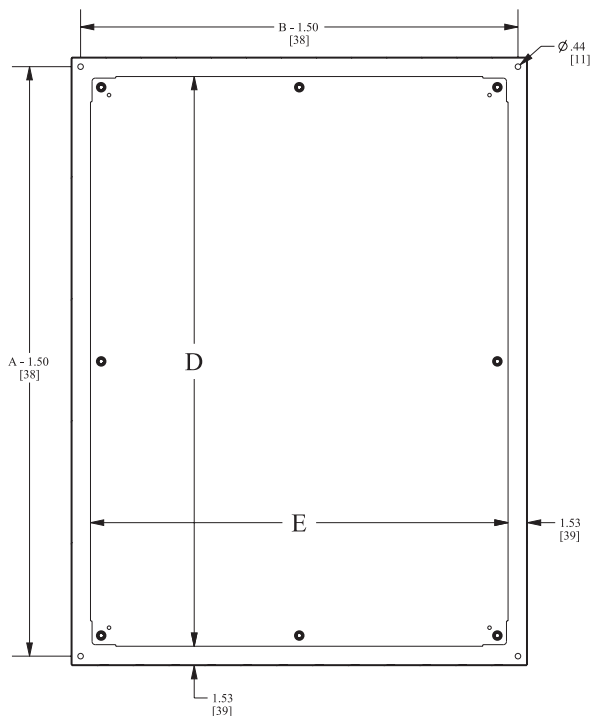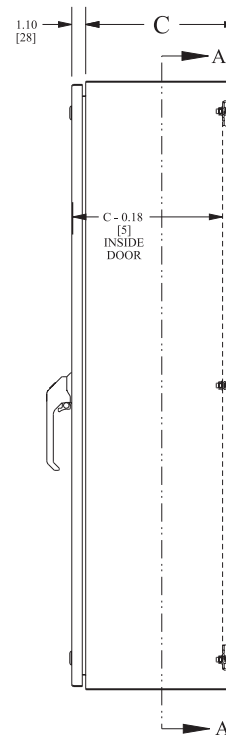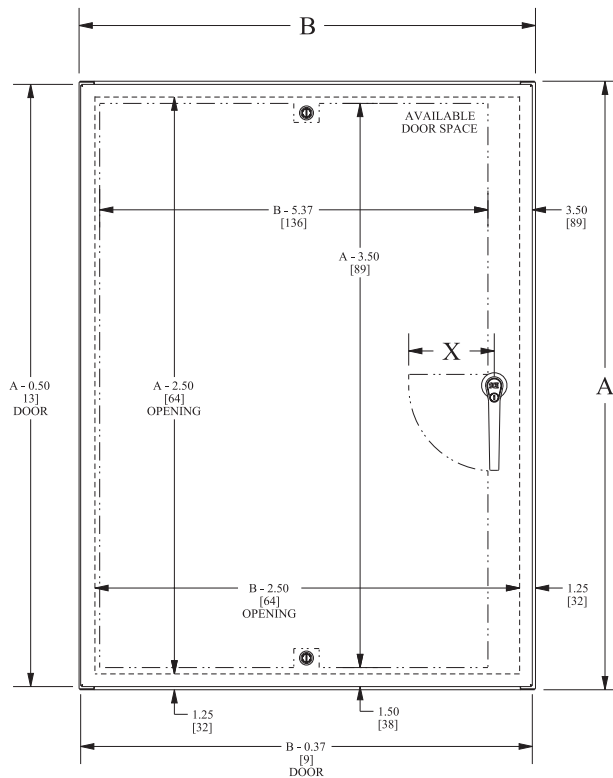

LATCH NOTES:
OMIT CENTER LATCH TOP AND BOTTOM
OF DOOR WHEN DOOR WIDTH IS < 30.00 [762]

HANDLE NOTES:
WHEN ENCLOSURE HEIGHT ≤ 42.00 [1067]
"X" = 5.50 [140]
WHEN ENCLOSURE HEIGHT > 42.00 [1067]
"X" = 6.75 [172]

304 Stainless Steel EnviroLine® Series Enclosures

Application -

Designed to house electrical and electronic controls, instruments and components in areas which may be regularly hosed down or are in very wet conditions. Provides protection from dust, dirt, oil, and water. For outdoor application a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Collar studs provided for mounting optional sub-panels.
- Stainless steel concealed hinge.
- Removable and interchangeable doors.
- Black quarter turn latches.
- Latches are opened or closed with a screwdriver (optional tamper-resistant inserts are available).
- Mounting holes in back of enclosure.
- Mounting hardware, sealing washer and hole plug included.
- Removable print pocket.
- Ground studs on door and body.

Options -


- Optional mounting feet available.
- Door hardware available.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66



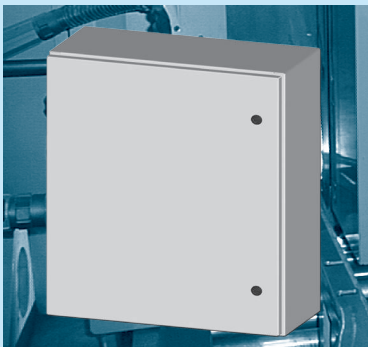


304 STAINLESS STEEL ENVIROLINE® SERIES ENCLOSURES

ENCLOSURE PRODUCT CODE S5						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-12EL1206SSLP	12.00	12.00	6.00	IS5	536.16	SCE-12DLP12	9.00	9.00	13.67
SCE-12EL2406SSLP	12.00	24.00	6.00	IS5	712.62	SCE-12P24	9.00	21.00	27.86
SCE-16EL1206SSLP	16.00	12.00	6.00	IS5	590.45	SCE-16P12	13.00	9.00	14.81
SCE-16EL1208SSLP	16.00	12.00	8.00	IS5	631.18	SCE-16P12	13.00	9.00	14.81
SCE-16EL1606SSLP	16.00	16.00	6.00	IS5	654.26	SCE-16P16	13.00	13.00	24.57
SCE-16EL1608SSLP	16.00	16.00	8.00	IS5	688.19	SCE-16P16	13.00	13.00	24.57
SCE-16EL2008SSLP	16.00	20.00	8.00	IS5	770.98	SCE-20P16	17.00	13.00	30.37
SCE-20EL1606SSLP	20.00	16.00	6.00	IS5	726.19	SCE-20P16	17.00	13.00	30.37
SCE-20EL1608SSLP	20.00	16.00	8.00	IS5	770.98	SCE-20P16	17.00	13.00	30.37
SCE-20EL1610SSLP	20.00	16.00	10.00	IS5	822.57	SCE-20P16	17.00	13.00	30.37
SCE-20EL2006SSLP	20.00	20.00	6.00	IS5	794.06	SCE-20P20	17.00	17.00	35.44
SCE-20EL2008SSLP	20.00	20.00	8.00	IS5	853.79	SCE-20P20	17.00	17.00	35.44
SCE-20EL2010SSLP	20.00	20.00	10.00	IS5	909.44	SCE-20P20	17.00	17.00	35.44
SCE-20EL2408SSLP	20.00	24.00	8.00	IS5	933.87	SCE-24P20	21.00	17.00	45.57
SCE-24EL1608SSLP	24.00	16.00	8.00	IS5	840.20	SCE-24P16	21.00	13.00	32.92
SCE-24EL2006SSLP	24.00	20.00	6.00	IS5	890.43	SCE-24P20	21.00	17.00	45.57
SCE-24EL2008SSLP	24.00	20.00	8.00	IS5	933.87	SCE-24P20	21.00	17.00	45.57
SCE-24EL2010SSLP	24.00	20.00	10.00	IS5	997.67	SCE-24P20	21.00	17.00	45.57
SCE-24EL2012SSLP	24.00	20.00	12.00	IS5	1,058.74	SCE-24P20	21.00	17.00	45.57
SCE-24EL2408SSLP	24.00	24.00	8.00	IS5	1,026.17	SCE-24P24	21.00	21.00	53.18
SCE-24EL2410SSLP	24.00	24.00	10.00	IS5	1,096.74	SCE-24P24	21.00	21.00	53.18
SCE-24EL2412SSLP	24.00	24.00	12.00	IS5	1,167.34	SCE-24P24	21.00	21.00	53.18
SCE-24EL2416SSLP	24.00	24.00	16.00	IS5	1,323.43	SCE-24P24	21.00	21.00	53.18
SCE-24EL3008SSLP	24.00	30.00	8.00	IS5	1,165.97	SCE-30P24	27.00	21.00	63.29
SCE-24EL3010SSLP	24.00	30.00	10.00	IS5	1,254.20	SCE-30P24	27.00	21.00	63.29
SCE-30EL1606SSLP	30.00	16.00	6.00	IS5	977.30	SCE-30P16	27.00	13.00	45.57
SCE-30EL2008SSLP	30.00	20.00	8.00	IS5	1,058.74	SCE-30P20	27.00	17.00	55.70
SCE-30EL2010SSLP	30.00	20.00	10.00	IS5	1,146.97	SCE-30P20	27.00	17.00	55.70
SCE-30EL2408SSLP	30.00	24.00	8.00	IS5	1,167.34	SCE-30P24	27.00	21.00	63.29
SCE-30EL2410SSLP	30.00	24.00	10.00	IS5	1,255.56	SCE-30P24	27.00	21.00	63.29
SCE-30EL2412SSLP	30.00	24.00	12.00	IS5	1,330.21	SCE-30P24	27.00	21.00	63.29
SCE-30EL2416SSLP	30.00	24.00	16.00	IS5	1,465.95	SCE-30P24	27.00	21.00	63.29
SCE-30EL3008SSLP	30.00	30.00	8.00	IS5	1,337.00	SCE-30P30	27.00	27.00	83.55
SCE-30EL3010SSLP	30.00	30.00	10.00	IS5	1,418.45	SCE-30P30	27.00	27.00	83.55
SCE-30EL3012SSLP	30.00	30.00	12.00	IS5	1,506.67	SCE-30P30	27.00	27.00	83.55
SCE-30EL3608SSLP	30.00	36.00	8.00	IS5	1,495.82	SCE-36P30	33.00	27.00	101.27
SCE-36EL2408SSLP	36.00	24.00	8.00	IS5	1,316.64	SCE-36P24	33.00	21.00	75.96
SCE-36EL2410SSLP	36.00	24.00	10.00	IS5	1,404.88	SCE-36P24	33.00	21.00	75.96
SCE-36EL3008SSLP	36.00	30.00	8.00	IS5	1,495.82	SCE-36P30	33.00	27.00	101.27
SCE-36EL3010SSLP	36.00	30.00	10.00	IS5	1,607.12	SCE-36P30	33.00	27.00	101.27
SCE-36EL3012SSLP	36.00	30.00	12.00	IS5	1,703.48	SCE-36P30	33.00	27.00	101.27
SCE-36EL3016SSLP	36.00	30.00	16.00	IS5	1,797.36	SCE-36P30	33.00	27.00	101.27
SCE-36EL3608SSLP	36.00	36.00	8.00	IS5	1,723.86	SCE-36P36	33.00	33.00	118.99
SCE-36EL3612SSLP	36.00	36.00	12.00	IS5	1,913.89	SCE-36P36	33.00	33.00	118.99
SCE-42EL2410SSLP	42.00	24.00	10.00	IS5	1,628.84	SCE-42P24	39.00	21.00	91.14
SCE-42EL3010SSLP	42.00	30.00	10.00	IS5	1,783.57	SCE-42P30	39.00	27.00	116.47
SCE-42EL3612SSLP	42.00	36.00	12.00	IS5	2,106.63	SCE-42P36	39.00	33.00	136.72
SCE-42EL3616SSLP	42.00	36.00	16.00	IS5	2,236.93	SCE-42P36	39.00	33.00	136.72
SCE-48EL3612SSLP	48.00	36.00	12.00	IS5	2,334.67	SCE-48P36	45.00	33.00	154.46
SCE-48EL3616SSLP	48.00	36.00	16.00	IS5	2,545.05	SCE-48P36	45.00	33.00	154.46
SCE-60EL3612SSLP	60.00	36.00	12.00	IS5	2,755.44	SCE-60P36	57.00	33.00	189.89
SCE-60EL3616SSLP	60.00	36.00	16.00	IS5	2,972.63	SCE-60P36	57.00	33.00	189.89
SCE-60EL3624SSLP	60.00	36.00	24.00	IS5	3,580.50	SCE-60P36	57.00	33.00	189.89
SCE-72EL3016SSLP	72.00	30.00	16.00	IS5	3,189.81	SCE-72P30	69.00	27.00	210.15
SCE-72EL3612SSLP	72.00	36.00	12.00	IS5	3,278.03	SCE-72P36	69.00	33.00	225.33
SCE-72EL3616SSLP	72.00	36.00	16.00	IS5	3,461.27	SCE-72P36	69.00	33.00	225.33

STAINLESS STEEL ENVIROLINE® SERIES ENCLOSURES

TECHNICAL DATA

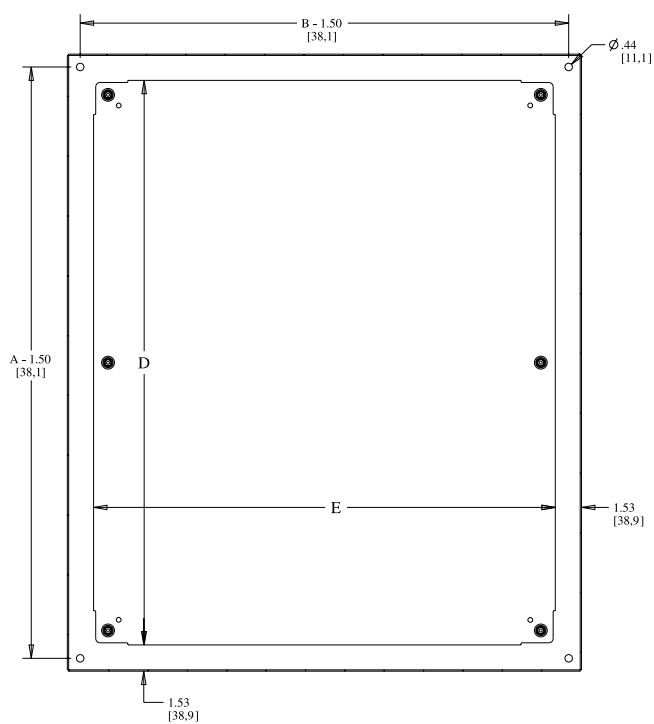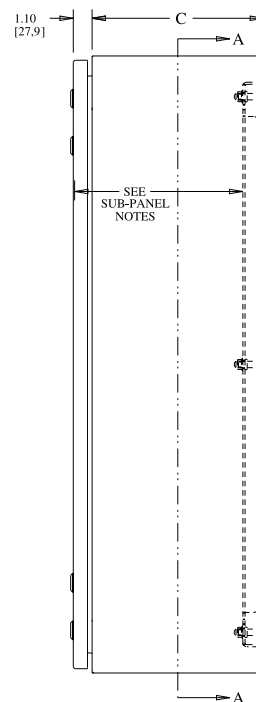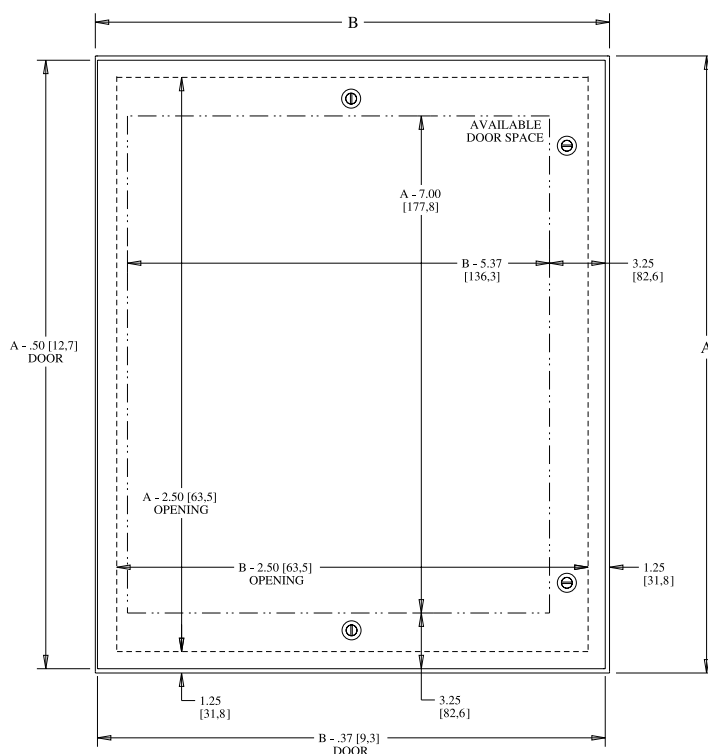

SECTION A-A

SUB-PANEL NOTES:

Dimensions are from the inside of the door
 C + 0.32 [8.1] for flat sub-panels
 C - 0.18 [4.5] for bent sub-panels

LATCH NOTES:

Enclosures < 24.00" [609.6] in height require only one latch centered on door.
 Enclosures ≥ 24.00" [609.6] and < 40.00" [1016] in height require two latches on door.
 Enclosures ≥ 40.00" [1016] require three latches on door.
 Omit center latch top and bottom of door when door width is ≤ 30.00" [762]

316 Stainless Steel Enviroline® Series Enclosures

Application -

Designed to house electrical and electronic controls, instruments and components in areas which may be regularly hosed down or are in very wet conditions. Provides protection from dust, dirt, oil, and water. For outdoor application a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Collar studs provided for mounting optional sub-panels.
- Stainless steel concealed hinge.
- Removable and interchangeable doors.
- Black quarter turn latches.
- Latches are opened or closed with a screwdriver (optional tamper-resistant inserts are available).
- Mounting holes in back of enclosure.
- Mounting hardware, sealing washer and hole plug included.
- Removable print pocket.
- Ground studs on door and body.

Options -


- Optional mounting feet available.
- Door hardware available.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66


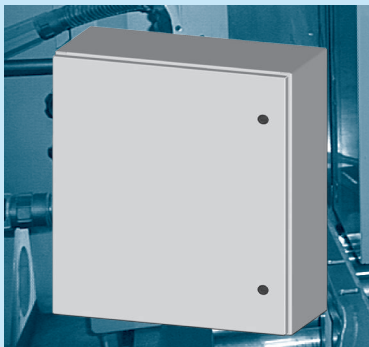


316 STAINLESS STEEL ENVIROLINE® SERIES ENCLOSURES

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-12EL1206SS6LP	12.00	12.00	6.00	IS5	643.39	SCE-12DLP12	9.00	9.00	13.67
SCE-12EL2406SS6LP	12.00	24.00	6.00	IS5	855.14	SCE-12P24	9.00	21.00	27.86
SCE-16EL1206SS6LP	16.00	12.00	6.00	IS5	708.54	SCE-16P12	13.00	9.00	14.81
SCE-16EL1208SS6LP	16.00	12.00	8.00	IS5	757.41	SCE-16P12	13.00	9.00	14.81
SCE-16EL1606SS6LP	16.00	16.00	6.00	IS5	785.11	SCE-16P16	13.00	13.00	24.57
SCE-16EL1608SS6LP	16.00	16.00	8.00	IS5	825.83	SCE-16P16	13.00	13.00	24.57
SCE-16EL2008SS6LP	16.00	20.00	8.00	IS5	925.17	SCE-20P16	17.00	13.00	30.37
SCE-20EL1606SS6LP	20.00	16.00	6.00	IS5	871.43	SCE-20P16	17.00	13.00	30.37
SCE-20EL1608SS6LP	20.00	16.00	8.00	IS5	925.17	SCE-20P16	17.00	13.00	30.37
SCE-20EL1610SS6LP	20.00	16.00	10.00	IS5	987.08	SCE-20P16	17.00	13.00	30.37
SCE-20EL2006SS6LP	20.00	20.00	6.00	IS5	952.88	SCE-20P20	17.00	17.00	35.44
SCE-20EL2008SS6LP	20.00	20.00	8.00	IS5	1,024.54	SCE-20P20	17.00	17.00	35.44
SCE-20EL2010SS6LP	20.00	20.00	10.00	IS5	1,091.33	SCE-20P20	17.00	17.00	35.44
SCE-20EL2408SS6LP	20.00	24.00	8.00	IS5	1,120.64	SCE-24P20	21.00	17.00	45.57
SCE-24EL1608SS6LP	24.00	16.00	8.00	IS5	1,008.25	SCE-24P16	21.00	13.00	32.92
SCE-24EL2006SS6LP	24.00	20.00	6.00	IS5	1,068.52	SCE-24P20	21.00	17.00	45.57
SCE-24EL2008SS6LP	24.00	20.00	8.00	IS5	1,120.64	SCE-24P20	21.00	17.00	45.57
SCE-24EL2010SS6LP	24.00	20.00	10.00	IS5	1,197.20	SCE-24P20	21.00	17.00	45.57
SCE-24EL2012SS6LP	24.00	20.00	12.00	IS5	1,270.49	SCE-24P20	21.00	17.00	45.57
SCE-24EL2408SS6LP	24.00	24.00	8.00	IS5	1,231.40	SCE-24P24	21.00	21.00	53.18
SCE-24EL2410SS6LP	24.00	24.00	10.00	IS5	1,316.08	SCE-24P24	21.00	21.00	53.18
SCE-24EL2412SS6LP	24.00	24.00	12.00	IS5	1,400.80	SCE-24P24	21.00	21.00	53.18
SCE-24EL2416SS6LP	24.00	24.00	16.00	IS5	1,588.12	SCE-24P24	21.00	21.00	53.18
SCE-24EL3008SS6LP	24.00	30.00	8.00	IS5	1,399.17	SCE-30P24	27.00	21.00	63.29
SCE-24EL3010SS6LP	24.00	30.00	10.00	IS5	1,505.04	SCE-30P24	27.00	21.00	63.29
SCE-30EL1606SS6LP	30.00	16.00	6.00	IS5	1,172.77	SCE-30P16	27.00	13.00	45.57
SCE-30EL2008SS6LP	30.00	20.00	8.00	IS5	1,270.49	SCE-30P20	27.00	17.00	55.70
SCE-30EL2010SS6LP	30.00	20.00	10.00	IS5	1,376.37	SCE-30P20	27.00	17.00	55.70
SCE-30EL2408SS6LP	30.00	24.00	8.00	IS5	1,400.80	SCE-30P24	27.00	21.00	63.29
SCE-30EL2410SS6LP	30.00	24.00	10.00	IS5	1,506.67	SCE-30P24	27.00	21.00	63.29
SCE-30EL2412SS6LP	30.00	24.00	12.00	IS5	1,596.26	SCE-30P24	27.00	21.00	63.29
SCE-30EL2416SS6LP	30.00	24.00	16.00	IS5	1,759.14	SCE-30P24	27.00	21.00	63.29
SCE-30EL3008SS6LP	30.00	30.00	8.00	IS5	1,604.41	SCE-30P30	27.00	27.00	83.55
SCE-30EL3010SS6LP	30.00	30.00	10.00	IS5	1,702.14	SCE-30P30	27.00	27.00	83.55
SCE-30EL3012SS6LP	30.00	30.00	12.00	IS5	1,808.01	SCE-30P30	27.00	27.00	83.55
SCE-30EL3608SS6LP	30.00	36.00	8.00	IS5	1,794.98	SCE-36P30	33.00	27.00	101.27
SCE-36EL2408SS6LP	36.00	24.00	8.00	IS5	1,579.97	SCE-36P24	33.00	21.00	75.96
SCE-36EL2410SS6LP	36.00	24.00	10.00	IS5	1,685.86	SCE-36P24	33.00	21.00	75.96
SCE-36EL3008SS6LP	36.00	30.00	8.00	IS5	1,794.98	SCE-36P30	33.00	27.00	101.27
SCE-36EL3010SS6LP	36.00	30.00	10.00	IS5	1,928.54	SCE-36P30	33.00	27.00	101.27
SCE-36EL3012SS6LP	36.00	30.00	12.00	IS5	2,044.18	SCE-36P30	33.00	27.00	101.27
SCE-36EL3608SS6LP	36.00	36.00	8.00	IS5	2,068.63	SCE-36P36	33.00	33.00	118.99
SCE-36EL3612SS6LP	36.00	36.00	12.00	IS5	2,296.66	SCE-36P36	33.00	33.00	118.99
SCE-42EL2410SS6LP	42.00	24.00	10.00	IS5	1,954.61	SCE-42P24	39.00	21.00	91.14
SCE-42EL3010SS6LP	42.00	30.00	10.00	IS5	2,140.28	SCE-42P30	39.00	27.00	116.47
SCE-42EL3612SS6LP	42.00	36.00	12.00	IS5	2,527.96	SCE-42P36	39.00	33.00	136.72
SCE-42EL3616SS6LP	42.00	36.00	16.00	IS5	2,684.32	SCE-42P36	39.00	33.00	136.72
SCE-48EL3612SS6LP	48.00	36.00	12.00	IS5	2,801.61	SCE-48P36	45.00	33.00	154.46
SCE-48EL3616SS6LP	48.00	36.00	16.00	IS5	3,054.06	SCE-48P36	45.00	33.00	154.46
SCE-60EL3612SS6LP	60.00	36.00	12.00	IS5	3,306.53	SCE-60P36	57.00	33.00	189.89
SCE-60EL3616SS6LP	60.00	36.00	16.00	IS5	3,567.15	SCE-60P36	57.00	33.00	189.89
SCE-72EL3016SS6LP	72.00	30.00	16.00	IS5	3,827.77	SCE-72P30	69.00	27.00	210.15
SCE-72EL3612SS6LP	72.00	36.00	12.00	IS5	3,933.64	SCE-72P36	69.00	33.00	225.33
SCE-72EL3616SS6LP	72.00	36.00	16.00	IS5	4,153.63	SCE-72P36	69.00	33.00	225.33

STAINLESS STEEL ENVIROLINE® SERIES ENCLOSURES

TECHNICAL DATA

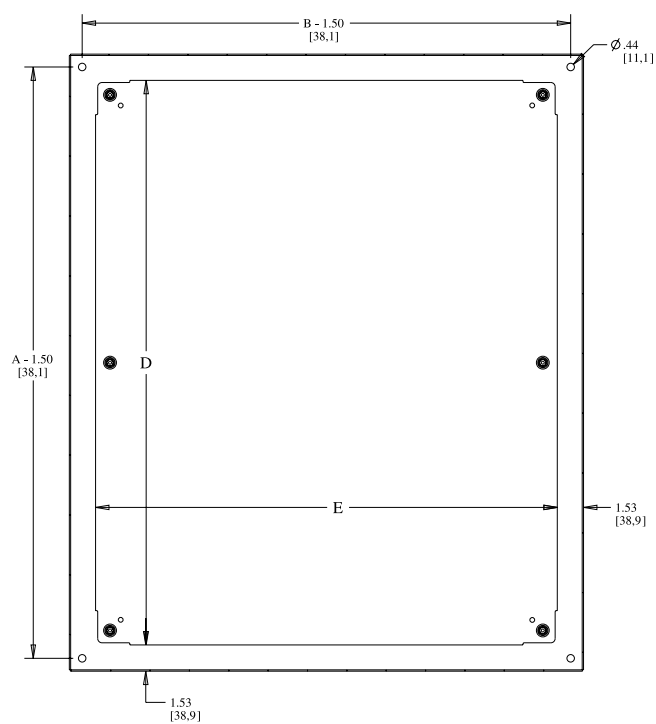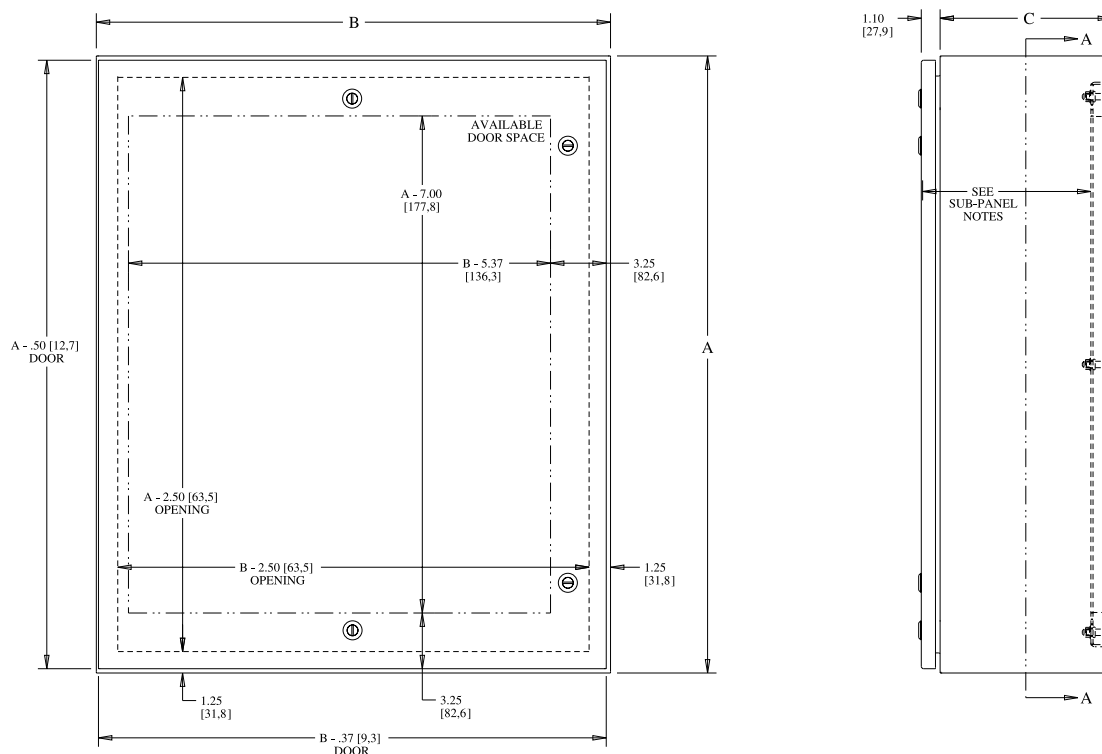

SECTION A-A

SUB-PANEL NOTES:

SUB-PANEL NOTES:
Dimensions are from the inside of the door

 $C + 0.32$ [8,1] for flat sub-panels

C - 0.18 [4,5] for bent sub-panels

LATCH NOTES:

Enclosures < 24.00" [609,6] in height require only one latch centered on door.

Enclosures $\geq 24.00"$ [609,6] and $< 40.00"$ [1016] in height require two latches on door.

Enclosures $\geq 40.00"$ [1016] require three latches on door.

Omit center latch top and bottom of door when door width is $\leq 30.00'$ [762]

Stainless Steel Enviroline® Series Wall-Mount Sloping Top Enclosures

Application -

Designed to house electrical and electronic controls, instrumentation and components in indoor, outdoor and sanitary locations. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- 15 Degree Sloping Top.
- Collar studs provided for mounting optional sub-panels.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Stainless steel concealed hinges.
- Removable and interchangeable doors.
- Black quarter turn latches.
- Latches are opened or closed with a screwdriver (optional tamper resistant latches are available).
- Removable print pocket.
- Oil & water resistant gasket.
- Ground stud on door and body.

Finish -

4 Brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT SLOPING TOP ENCLOSURES


ENCLOSURE PRODUCT CODE S8						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-16EL1208SSST	16.00	12.00	8.00	IS5	883.65	SCE-16P12	13.00	9.00	14.81
SCE-16EL1608SSST	16.00	16.00	8.00	IS5	963.47	SCE-16P16	13.00	13.00	24.57
SCE-20EL1608SSST	20.00	16.00	8.00	IS5	1,079.37	SCE-20P16	17.00	13.00	30.37
SCE-20EL1612SSST	20.00	16.00	12.00	IS5	1,210.13	SCE-20P16	17.00	13.00	30.37
SCE-20EL2008SSST	20.00	20.00	8.00	IS5	1,195.31	SCE-20P20	17.00	17.00	35.44
SCE-20EL2012SSST	20.00	20.00	12.00	IS5	1,343.69	SCE-20P20	17.00	17.00	35.44
SCE-24EL2008SSST	24.00	20.00	8.00	IS5	1,307.56	SCE-24P20	21.00	17.00	45.57
SCE-24EL2012SSST	24.00	20.00	12.00	IS5	1,482.24	SCE-24P20	21.00	17.00	45.57
SCE-24EL2408SSST	24.00	24.00	8.00	IS5	1,436.64	SCE-24P24	21.00	21.00	53.18
SCE-24EL2412SSST	24.00	24.00	12.00	IS5	1,634.28	SCE-24P24	21.00	21.00	53.18
SCE-30EL2408SSST	30.00	24.00	8.00	IS5	1,634.28	SCE-30P24	27.00	21.00	63.29
SCE-30EL2412SSST	30.00	24.00	12.00	IS5	1,862.29	SCE-30P24	27.00	21.00	63.29
SCE-30EL3008SSST	30.00	30.00	8.00	IS5	1,871.80	SCE-30P30	27.00	27.00	83.55
SCE-36EL2408SSST	36.00	24.00	8.00	IS5	1,843.30	SCE-36P24	33.00	21.00	75.96
SCE-36EL2412SSST	36.00	24.00	12.00	IS5	2,072.73	SCE-36P24	33.00	21.00	75.96
SCE-36EL3008SSST	36.00	30.00	8.00	IS5	2,094.15	SCE-36P30	33.00	27.00	101.27
SCE-36EL3012SSST	36.00	30.00	12.00	IS5	2,384.87	SCE-36P30	33.00	27.00	101.27
SCE-36EL3016SSST	36.00	30.00	16.00	IS5	2,528.04	SCE-36P30	33.00	27.00	101.27
SCE-48EL3616SSST	48.00	36.00	16.00	IS5	3,563.07	SCE-48P36	45.00	33.00	154.46
SCE-60EL3616SSST	60.00	36.00	16.00	IS5	4,162.10	SCE-60P36	57.00	33.00	189.89



Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT SLOPING TOP ENCLOSURES TECHNICAL DATA

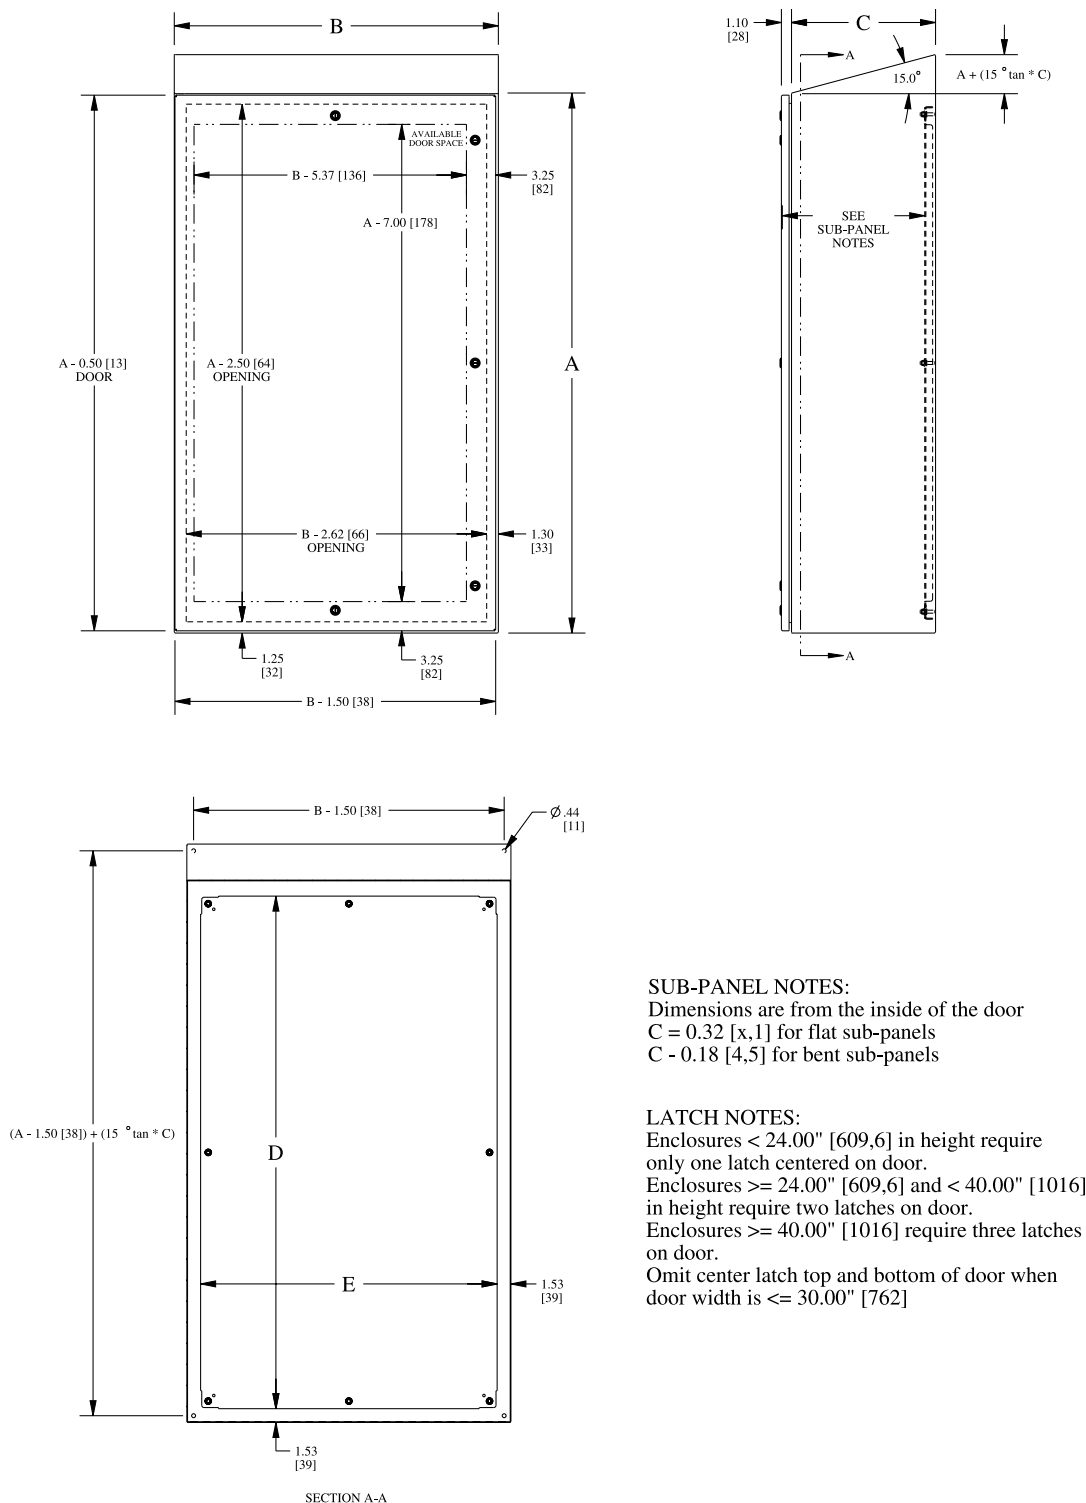

304 Stainless Steel Clamp Fastened Single-Door Enclosures

Application -

Designed to house electrical and electronic controls, instruments and components in areas which may be regularly hosed down or are in very wet conditions. Provides protection from dust, dirt, oil and water. For outdoor application a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -


- 0.075" stainless steel Type 304.
- No holes or knockouts, continuously welded seams ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant door gasket.
- Collar studs provided for mounting optional sub-panels.
- Hasp and staple for padlocking.
- Stainless steel continuous hinge.
- Print pocket.
- Ground stud on door.
- Stainless steel clamps.

Finish -

#4 brushed finish on all exterior surfaces. Optional panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

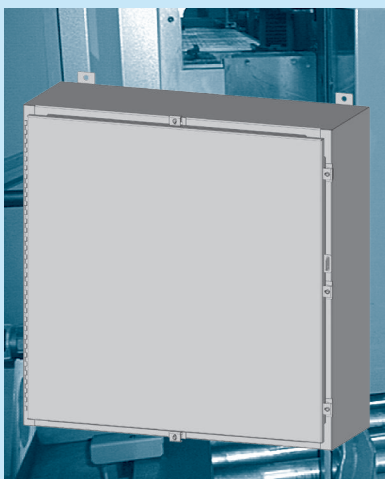




304 STAINLESS STEEL CLAMP FASTENED SINGLE-DOOR ENCLOSURES

ENCLOSURE PRODUCT CODE S3						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-16H1206SSLP	16.00	12.00	6.00	IS5	627.11	SCE-16P12	13.00	9.00	14.81
SCE-16H1208SSLP	16.00	12.00	8.00	IS5	671.90	SCE-16P12	13.00	9.00	14.81
SCE-16H1606SSLP	16.00	16.00	6.00	IS5	696.32	SCE-16P16	13.00	13.00	24.57
SCE-16H2006SSLP	16.00	20.00	6.00	IS5	765.54	SCE-20P16	17.00	13.00	30.37
SCE-20H1606SSLP	20.00	16.00	6.00	IS5	765.54	SCE-20P16	17.00	13.00	30.37
SCE-20H1608SSLP	20.00	16.00	8.00	IS5	819.84	SCE-20P16	17.00	13.00	30.37
SCE-20H1610SSLP	20.00	16.00	10.00	IS5	875.50	SCE-20P16	17.00	13.00	30.37
SCE-20H2006SSLP	20.00	20.00	6.00	IS5	844.28	SCE-20P20	17.00	17.00	35.44
SCE-20H2408SSLP	20.00	24.00	8.00	IS5	990.88	SCE-24P20	21.00	17.00	45.57
SCE-24H1608SSLP	24.00	16.00	8.00	IS5	891.79	SCE-24P16	21.00	13.00	32.92
SCE-24H2006SSLP	24.00	20.00	6.00	IS5	924.36	SCE-24P20	21.00	17.00	45.57
SCE-24H2008SSLP	24.00	20.00	8.00	IS5	990.88	SCE-24P20	21.00	17.00	45.57
SCE-24H2010SSLP	24.00	20.00	10.00	IS5	1,058.74	SCE-24P20	21.00	17.00	45.57
SCE-24H2406SSLP	24.00	24.00	6.00	IS5	950.00	SCE-24P24	21.00	21.00	53.18
SCE-24H2408SSLP	24.00	24.00	8.00	IS5	1,089.96	SCE-24P24	21.00	21.00	53.18
SCE-24H2412SSLP	24.00	24.00	12.00	IS5	1,237.92	SCE-24P24	21.00	21.00	53.18
SCE-24H3008SSLP	24.00	30.00	8.00	IS5	1,237.92	SCE-30P24	27.00	21.00	63.29
SCE-30H2008SSLP	30.00	20.00	8.00	IS5	1,121.18	SCE-30P20	27.00	17.00	55.70
SCE-30H2408SSLP	30.00	24.00	8.00	IS5	1,237.92	SCE-30P24	27.00	21.00	63.29
SCE-30H2412SSLP	30.00	24.00	12.00	IS5	1,403.51	SCE-30P24	27.00	21.00	63.29
SCE-30H2416SSLP	30.00	24.00	16.00	IS5	1,571.81	SCE-30P24	27.00	21.00	63.29
SCE-30H3008SSLP	30.00	30.00	8.00	IS5	1,414.38	SCE-30P30	27.00	27.00	83.55
SCE-36H2408SSLP	36.00	24.00	8.00	IS5	1,385.87	SCE-36P24	33.00	21.00	75.96
SCE-36H2410SSLP	36.00	24.00	10.00	IS5	1,479.52	SCE-36P24	33.00	21.00	75.96
SCE-36H3008SSLP	36.00	30.00	8.00	IS5	1,589.47	SCE-36P30	33.00	27.00	101.27
SCE-36H3010SSLP	36.00	30.00	10.00	IS5	1,691.28	SCE-36P30	33.00	27.00	101.27
SCE-36H3012SSLP	36.00	30.00	12.00	IS5	1,793.07	SCE-36P30	33.00	27.00	101.27
SCE-36H3016SSLP	36.00	30.00	16.00	IS5	1,995.33	SCE-36P30	33.00	27.00	101.27
SCE-36H3612SSLP	36.00	36.00	12.00	IS5	2,014.32	SCE-36P36	33.00	33.00	118.99
SCE-42H3010SSLP	42.00	30.00	10.00	IS5	1,875.88	SCE-42P30	39.00	27.00	116.47
SCE-42H3608SSLP	42.00	36.00	8.00	IS5	1,995.33	SCE-42P36	39.00	33.00	136.72
SCE-48H3608SSLP	48.00	36.00	8.00	IS5	2,198.93	SCE-48P36	45.00	33.00	154.46
SCE-48H3612SSLP	48.00	36.00	12.00	IS5	2,456.83	SCE-48P36	45.00	33.00	154.46
SCE-48H3616SSLP	48.00	36.00	16.00	IS5	2,716.09	SCE-48P36	45.00	33.00	154.46
SCE-60H3612SSLP	60.00	36.00	12.00	IS5	2,900.69	SCE-60P36	57.00	33.00	189.89

Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL CLAMP FASTENED SINGLE-DOOR ENCLOSURES TECHNICAL DATA

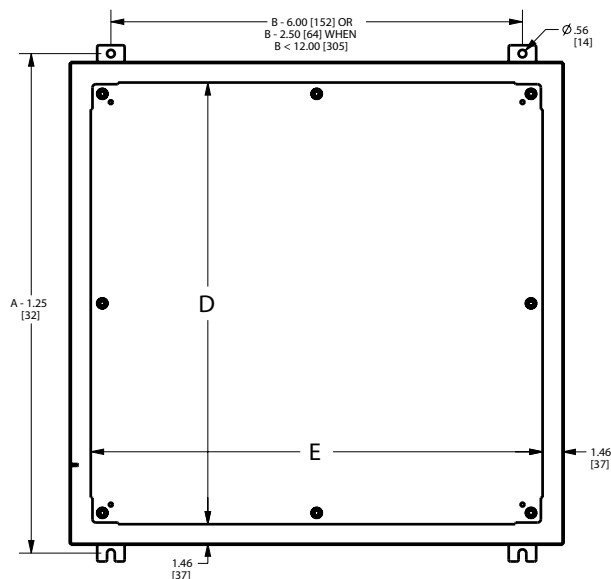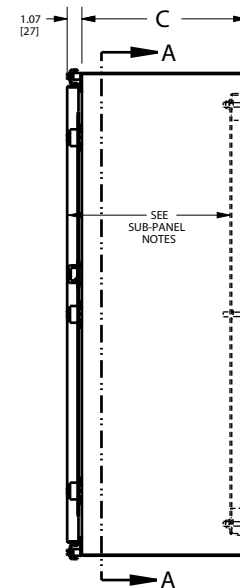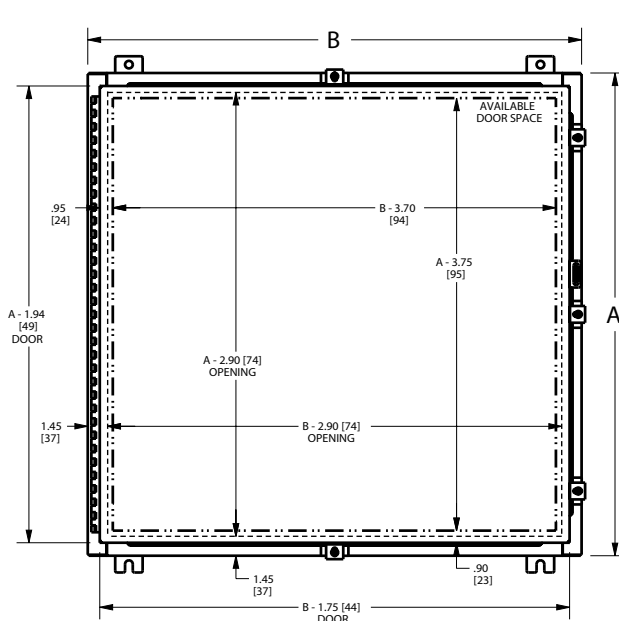

SECTION A-A

SUB-PANEL NOTES:
Dimensions from the inside of the door
C + 0.29 [7] for flat sub-panels
C - 0.21 [5] for bent sub-panels

CLAMPING NOTES:
Enclosures < 27.00 [686] in height require two clamps on door.
Enclosures ≥ 27.00 [686] in height require three clamps on door.
Omit center clamp top and bottom of door when door width is ≤ 30.00 [762].

316 Stainless Steel Clamp Fastened Single-Door Enclosures

Application -

Designed to house electrical and electronic controls, instruments and components in areas which may be regularly hosed down or are in very wet conditions. Provides protection from dust, dirt, oil and water. For outdoor application a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -


- 0.075" stainless steel Type 316/316L.
- No holes or knockouts, continuously welded seams ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant door gasket.
- Collar studs provided for mounting optional sub-panels.
- Hasp and staple for padlocking.
- Stainless steel continuous hinge.
- Print pocket.
- Ground stud on door.
- Stainless steel clamps.

Finish -

#4 brushed finish on all exterior surfaces. Optional panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

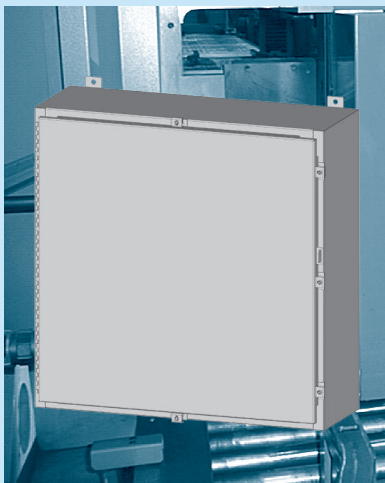

316 STAINLESS STEEL CLAMP FASTENED SINGLE-DOOR ENCLOSURES




ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-16H1206SS6LP	16.00	12.00	6.00	IS5	752.53	SCE-16P12	13.00	9.00	14.81
SCE-16H1208SS6LP	16.00	12.00	8.00	IS5	806.28	SCE-16P12	13.00	9.00	14.81
SCE-16H1606SS6LP	16.00	16.00	6.00	IS5	835.59	SCE-16P16	13.00	13.00	24.57
SCE-16H2006SS6LP	16.00	20.00	6.00	IS5	918.65	SCE-20P16	17.00	13.00	30.37
SCE-20H1606SS6LP	20.00	16.00	6.00	IS5	918.65	SCE-20P16	17.00	13.00	30.37
SCE-20H1608SS6LP	20.00	16.00	8.00	IS5	983.81	SCE-20P16	17.00	13.00	30.37
SCE-20H1610SS6LP	20.00	16.00	10.00	IS5	1,050.60	SCE-20P16	17.00	13.00	30.37
SCE-20H2006SS6LP	20.00	20.00	6.00	IS5	1,013.14	SCE-20P20	17.00	17.00	35.44
SCE-20H2408SS6LP	20.00	24.00	8.00	IS5	1,189.05	SCE-24P20	21.00	17.00	45.57
SCE-24H1608SS6LP	24.00	16.00	8.00	IS5	1,070.15	SCE-24P16	21.00	13.00	32.92
SCE-24H2006SS6LP	24.00	20.00	6.00	IS5	1,109.24	SCE-24P20	21.00	17.00	45.57
SCE-24H2008SS6LP	24.00	20.00	8.00	IS5	1,189.05	SCE-24P20	21.00	17.00	45.57
SCE-24H2010SS6LP	24.00	20.00	10.00	IS5	1,270.49	SCE-24P20	21.00	17.00	45.57
SCE-24H2408SS6LP	24.00	24.00	8.00	IS5	1,307.95	SCE-24P24	21.00	21.00	53.18
SCE-24H2412SS6LP	24.00	24.00	12.00	IS5	1,485.51	SCE-24P24	21.00	21.00	53.18
SCE-24H3008SS6LP	24.00	30.00	8.00	IS5	1,485.51	SCE-30P24	27.00	21.00	63.29
SCE-30H2008SS6LP	30.00	20.00	8.00	IS5	1,345.42	SCE-30P20	27.00	17.00	55.70
SCE-30H2408SS6LP	30.00	24.00	8.00	IS5	1,485.51	SCE-30P24	27.00	21.00	63.29
SCE-30H2412SS6LP	30.00	24.00	12.00	IS5	1,684.21	SCE-30P24	27.00	21.00	63.29
SCE-30H2416SS6LP	30.00	24.00	16.00	IS5	1,886.18	SCE-30P24	27.00	21.00	63.29
SCE-30H3008SS6LP	30.00	30.00	8.00	IS5	1,697.26	SCE-30P30	27.00	27.00	83.55
SCE-36H2408SS6LP	36.00	24.00	8.00	IS5	1,663.04	SCE-36P24	33.00	21.00	75.96
SCE-36H2410SS6LP	36.00	24.00	10.00	IS5	1,775.43	SCE-36P24	33.00	21.00	75.96
SCE-36H3008SS6LP	36.00	30.00	8.00	IS5	1,907.36	SCE-36P30	33.00	27.00	101.27
SCE-36H3010SS6LP	36.00	30.00	10.00	IS5	2,029.53	SCE-36P30	33.00	27.00	101.27
SCE-36H3012SS6LP	36.00	30.00	12.00	IS5	2,151.69	SCE-36P30	33.00	27.00	101.27
SCE-36H3016SS6LP	36.00	30.00	16.00	IS5	2,394.40	SCE-36P30	33.00	27.00	101.27
SCE-36H3612SS6LP	36.00	36.00	12.00	IS5	2,417.18	SCE-36P36	33.00	33.00	118.99
SCE-42H3010SS6LP	42.00	30.00	10.00	IS5	2,251.05	SCE-42P30	39.00	27.00	116.47
SCE-42H3608SS6LP	42.00	36.00	8.00	IS5	2,394.40	SCE-42P36	39.00	33.00	136.72
SCE-48H3608SS6LP	48.00	36.00	8.00	IS5	2,638.72	SCE-48P36	45.00	33.00	154.46
SCE-48H3612SS6LP	48.00	36.00	12.00	IS5	2,948.19	SCE-48P36	45.00	33.00	154.46
SCE-48H3616SS6LP	48.00	36.00	16.00	IS5	3,259.31	SCE-48P36	45.00	33.00	154.46
SCE-60H3612SS6LP	60.00	36.00	12.00	IS5	3,480.82	SCE-60P36	57.00	33.00	189.89

Available within 10 working days if not in stock

Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL CLAMP FASTENED SINGLE-DOOR ENCLOSURES TECHNICAL DATA

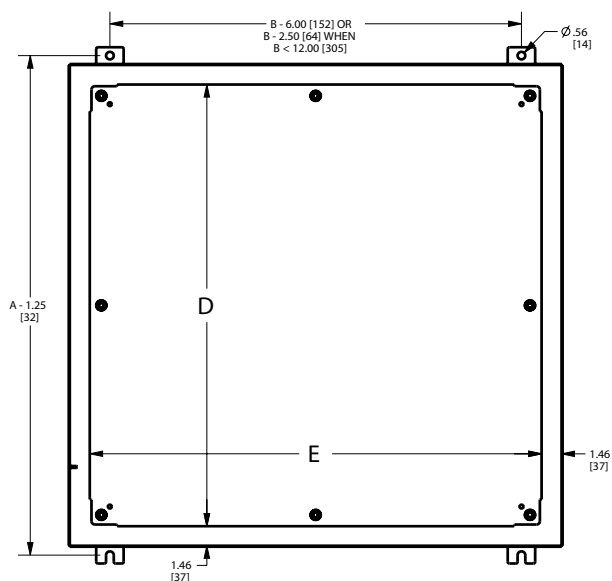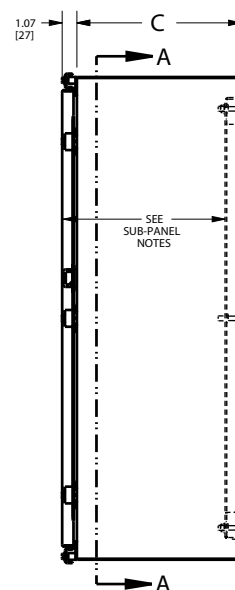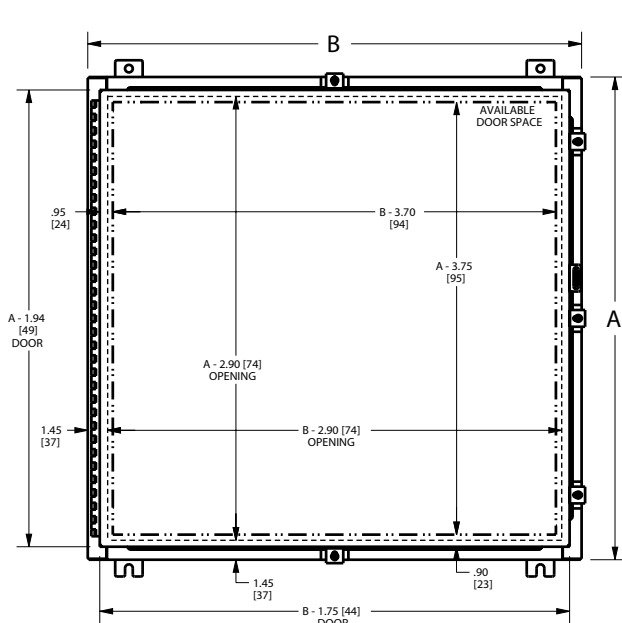

SECTION A-A

SUB-PANEL NOTES:
Dimensions from the inside of the door
C + 0.29 [7] for flat sub-panels
C - 0.21 [5] for bent sub-panels

CLAMPING NOTES:
Enclosures < 27.00 [686] in height require two clamps on door.
Enclosures ≥ 27.00 [686] in height require three clamps on door.
Omit center clamp top and bottom of door when door width is ≤ 30.00 [762].

Stainless Steel Enviroline® Series Wall-Mount Two-Door Enclosures With 3-Point Hardware

Application -

Designed to house electrical and electronic controls, instrumentation and components. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Collar studs provided for mounting optional sub-panels.
- Removable center posts permit easy panel installation.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Stainless steel concealed hinges.
- Removable and interchangeable doors.
- Black keylocking padlocking handles.
- 3-point latching mechanism.
- Removable print pocket.
- Oil & water resistant gasket.
- Ground stud on door and body.

Options -

Provisions for mechanical interlock.
See accessory section to order.

Finish -

#4 Brushed finish on all exterior surfaces.
Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12

STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE


ENCLOSURE PRODUCT CODE S5						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-24EL4210SSWFLP	24.00	42.00	10.00	IS5	2,990.12	SCE-42P24	39.00	21.00	91.14
SCE-24EL4810SSWFLP	24.00	48.00	10.00	IS5	3,108.66	SCE-48P24	45.00	21.00	98.74
SCE-30EL4210SSWFLP	30.00	42.00	10.00	IS5	3,168.28	SCE-42P30	39.00	27.00	116.47
SCE-30EL4810SSWFLP	30.00	48.00	10.00	IS5	3,347.42	SCE-48P30	45.00	27.00	129.13
SCE-30EL6010SSWFLP	30.00	60.00	10.00	IS5	3,758.21	SCE-60P30	57.00	27.00	159.52
SCE-36EL4212SSWFLP	36.00	42.00	12.00	IS5	3,772.54	SCE-42P36	39.00	33.00	136.72
SCE-36EL4812SSWFLP	36.00	48.00	12.00	IS5	3,866.89	SCE-48P36	45.00	33.00	154.46
SCE-36EL6012SSWFLP	36.00	60.00	12.00	IS5	4,269.15	SCE-60P36	57.00	33.00	189.89
SCE-42EL4212SSWFLP	42.00	42.00	12.00	IS5	3,824.34	SCE-42P42	39.00	39.00	156.97
SCE-42EL4812SSWFLP	42.00	48.00	12.00	IS5	4,248.08	SCE-48P42	45.00	39.00	177.24
SCE-42EL6012SSWFLP	42.00	60.00	12.00	IS5	4,460.85	SCE-60BFP42	56.00	38.00	230.41
SCE-48EL4812SSWFLP	48.00	48.00	12.00	IS5	4,359.04	SCE-48P48	44.00	44.00	212.67




Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE TECHNICAL DATA

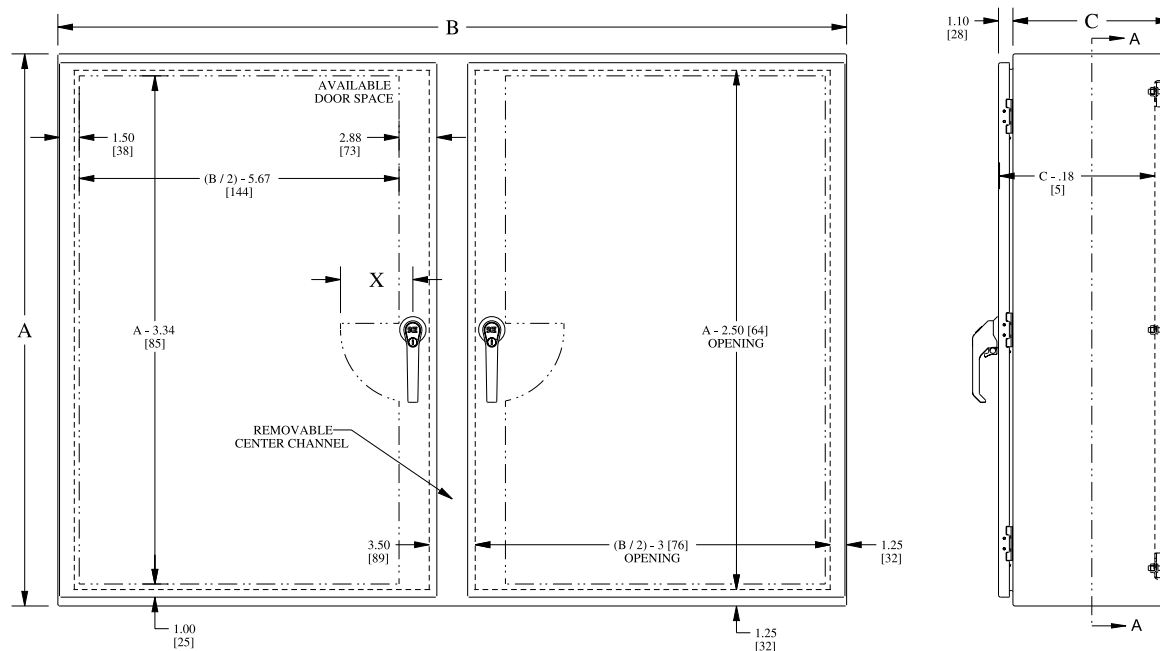

HANDLE NOTES:
Enclosures ≤ 42.00 [1067] in height
X = 5.50 [140] and uses 5.00 [127]
key-locking/padlocking handle.
Enclosures > 42.00 [1067] in height
X = 6.75 [171] and uses 7.00 [178]
key-locking/padlocking handle.

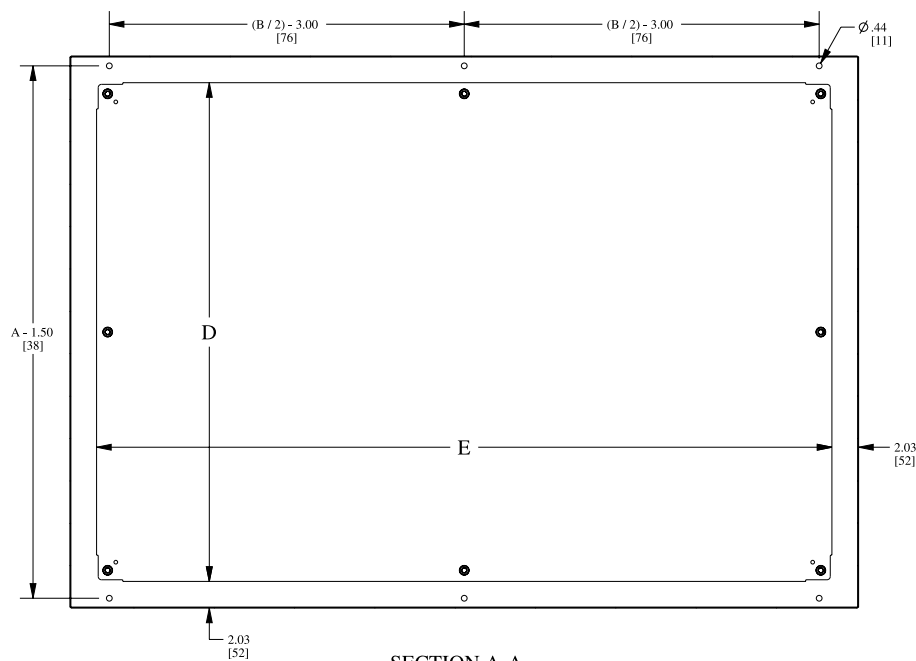

SECTION A-A

304 Stainless Steel Enviroline® Series Single-Door Enclosures For Flange-Mounted Disconnects

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com. For outdoor application a drip shield is recommended.

Construction -

- 0.075" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Collar studs provided for mounting optional sub-panels.
- Holes provided in body for mounting disconnect operating handle and operating mechanism.
- Stainless steel concealed hinge.
- Doors are interchangeable and easily removed by pulling hinge pin.
- 3-point latching mechanism.
- Latches are opened or closed with screwdriver (optional tamper-resistant inserts available).
- Mounting holes in back of enclosure.
- Mounting hardware, sealing washer and hole plug included.
- Black quarter turn latches as required.
- Ground studs on door and body.
- Black zinc die cast coinproof/padlocking handle.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

304 STAINLESS STEEL ENVIROLINE® SERIES SINGLE-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

ENCLOSURE PRODUCT CODE S5						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-20XEL2108SSLP	20.00	21.38	8.00	IS6	909.44	SCE-20P20	17.00	17.00	35.44
SCE-24XEL2108SSLP	24.00	21.38	8.00	IS6	990.88	SCE-24P20	21.00	17.00	45.57
SCE-24XEL2508SSLP	24.00	25.38	8.00	IS6	1,077.75	SCE-24P24	21.00	21.00	53.18
SCE-24XEL2510SSLP	24.00	25.38	10.00	IS6	1,152.39	SCE-24P24	21.00	21.00	53.18
SCE-30XEL2508SSLP	30.00	25.38	8.00	IS6	1,262.54	SCE-30P24	27.00	21.00	63.29
SCE-30XEL2510SSLP	30.00	25.38	10.00	IS6	1,375.82	SCE-30P24	27.00	21.00	63.29
SCE-36XEL2508SSLP	36.00	25.38	8.00	IS6	1,448.47	SCE-36P24	33.00	21.00	75.96
SCE-36XEL3110SSLP	36.00	31.38	10.00	IS6	1,704.24	SCE-36P30	33.00	27.00	101.27
SCE-36XEL3112SSLP	36.00	31.38	12.00	IS6	1,802.42	SCE-36P30	33.00	27.00	101.27
SCE-42XEL3110SSLP	42.00	31.38	10.00	IS6	1,941.03	SCE-42P30	39.00	27.00	116.47
SCE-42XEL3112SSLP	42.00	31.38	12.00	IS6	2,049.63	SCE-42P30	39.00	27.00	116.47
SCE-42XEL3712SSLP	42.00	37.38	12.00	IS6	2,226.07	SCE-42P36	39.00	33.00	136.72
SCE-42XEL3716SSLP	42.00	37.38	16.00	IS6	2,490.77	SCE-42P36	39.00	33.00	136.72
SCE-48XEL3710SSLP	48.00	37.38	10.00	IS6	2,293.94	SCE-48P36	45.00	33.00	154.46
SCE-48XEL3712SSLP	48.00	37.38	12.00	IS6	2,422.90	SCE-48P36	45.00	33.00	154.46
SCE-48XEL3716SSLP	48.00	37.38	16.00	IS6	2,694.37	SCE-48P36	45.00	33.00	154.46
SCE-60XEL3712SSLP	60.00	37.38	12.00	IS6	3,024.20	SCE-60P36	57.00	33.00	189.89
SCE-60XEL3716SSLP	60.00	37.38	16.00	IS6	3,309.25	SCE-60P36	57.00	33.00	189.89

Available within 10 working days if not in stock






Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES SINGLE-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

TECHNICAL DATA

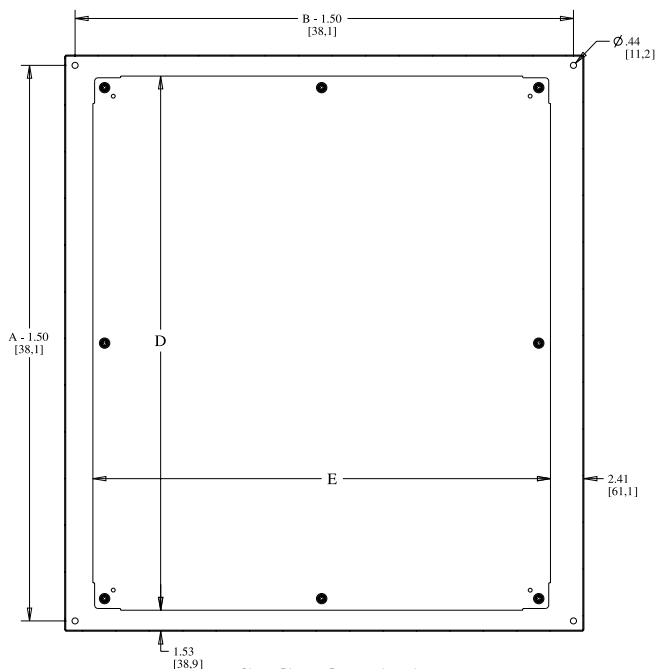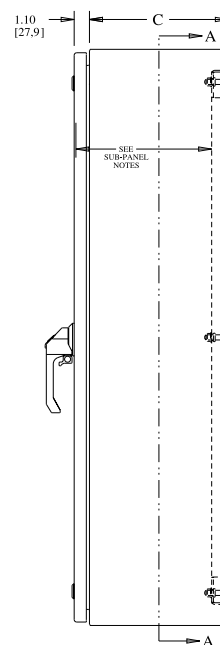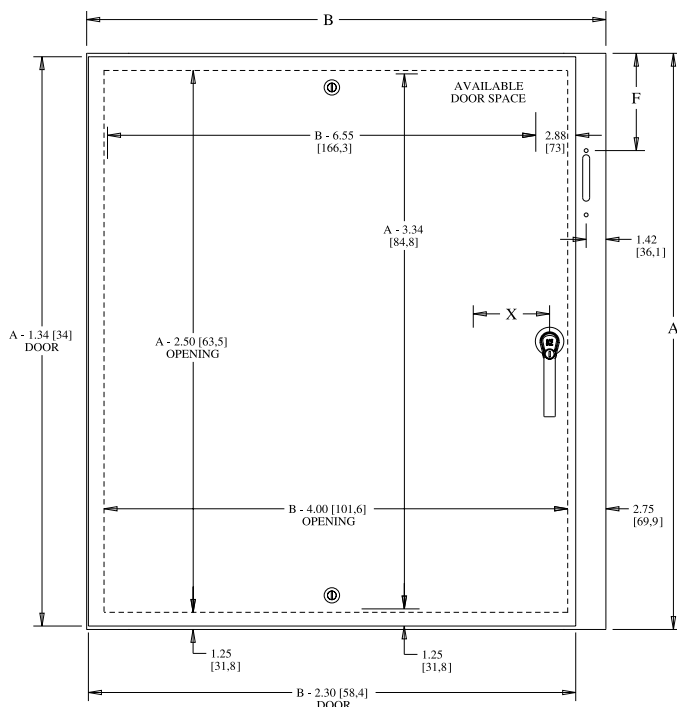

SECTION A-A

SUB-PANEL NOTES:

Dimensions are from the inside of the door.

C + .32 [8.1] for flat sub-panels

C - .18 [4.5] for bent sub-panels

DISCONNECT NOTES:

F = 4.75 [121] when C = 8.00 [203]

F = 7.09 [180] when C = 10.00 [254]

F = 11.62 [295] when C = 12.00 [304]

F = 11.62 [295] when C = 16.00 [406]

F = 18.38 [467] for SCE-60XEL3712LP4

LATCH NOTES:

Omit center latch top and bottom of door when door width is ≤ 30.00" [762]

HANDLE NOTES:

On enclosures ≤ 42.00 [1067]

X = 5.50 [140] and use 5.00 [127]

padlocking handle with coin-proof.

On enclosures > 42.00 [1067]

X = 6.75 [171] and use 7.00 [178]

padlocking handle with coin-proof.

Enclosures with a height dimension < 40.00 [1016] have a 2-point door closing mechanism.

Enclosures with a height dimension of ≥ 40.00 [1016] have a 3-point door latching mechanism.

CONSTRUCTION NOTES:

Door will be 0.125 [3.1] thick material when enclosure height is ≥ 42.00 and door width is > 24.00

316 Stainless Steel Enviroline® Series Single-Door Enclosures For Flange-Mounted Disconnects

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com. For outdoor application a drip shield is recommended.

Construction -

- 0.075" stainless steel Type 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Collar studs provided for mounting optional sub-panels.
- Holes provided in body for mounting disconnect operating handle and operating mechanism.
- Stainless steel concealed hinge.
- Doors are interchangeable and easily removed by pulling hinge pin.
- 3-point latching mechanism.
- Latches are opened or closed with screwdriver (optional tamper-resistant inserts available).
- Mounting holes in back of enclosure.
- Mounting hardware, sealing washer and hole plug included.
- Black quarter turn latches as required.
- Ground studs on door and body.
- Black zinc die cast coinproof/padlocking handle.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

316 STAINLESS STEEL ENVIROLINE® SERIES SINGLE-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-20XEL2108SS6LP	20.00	21.38	8.00	IS6	1,091.33	SCE-20P20	17.00	17.00	35.44
SCE-24XEL2108SS6LP	24.00	21.38	8.00	IS6	1,189.05	SCE-24P20	21.00	17.00	45.57
SCE-24XEL2508SS6LP	24.00	25.38	8.00	IS6	1,293.30	SCE-24P24	21.00	21.00	53.18
SCE-24XEL2510SS6LP	24.00	25.38	10.00	IS6	1,382.87	SCE-24P24	21.00	21.00	53.18
SCE-30XEL2508SS6LP	30.00	25.38	8.00	IS6	1,515.05	SCE-30P24	27.00	21.00	63.29
SCE-30XEL2510SS6LP	30.00	25.38	10.00	IS6	1,650.98	SCE-30P24	27.00	21.00	63.29
SCE-36XEL2508SS6LP	36.00	25.38	8.00	IS6	1,738.16	SCE-36P24	33.00	21.00	75.96
SCE-36XEL3110SS6LP	36.00	31.38	10.00	IS6	2,045.09	SCE-36P30	33.00	27.00	101.27
SCE-36XEL3112SS6LP	36.00	31.38	12.00	IS6	2,162.90	SCE-36P30	33.00	27.00	101.27
SCE-42XEL3110SS6LP	42.00	31.38	10.00	IS6	2,329.23	SCE-42P30	39.00	27.00	116.47
SCE-42XEL3112SS6LP	42.00	31.38	12.00	IS6	2,459.55	SCE-42P30	39.00	27.00	116.47
SCE-42XEL3712SS6LP	42.00	37.38	12.00	IS6	2,671.29	SCE-42P36	39.00	33.00	136.72
SCE-42XEL3716SS6LP	42.00	37.38	16.00	IS6	2,988.92	SCE-42P36	39.00	33.00	136.72
SCE-48XEL3710SS6LP	48.00	37.38	10.00	IS6	2,752.73	SCE-48P36	45.00	33.00	154.46
SCE-48XEL3712SS6LP	48.00	37.38	12.00	IS6	2,907.47	SCE-48P36	45.00	33.00	154.46
SCE-48XEL3716SS6LP	48.00	37.38	16.00	IS6	3,233.25	SCE-48P36	45.00	33.00	154.46
SCE-60XEL3712SS6LP	60.00	37.38	12.00	IS6	3,629.05	SCE-60P36	57.00	33.00	189.89
SCE-60XEL3716SS6LP	60.00	37.38	16.00	IS6	3,971.10	SCE-60P36	57.00	33.00	189.89

Available within 10 working days if not in stock






Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES SINGLE-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

TECHNICAL DATA

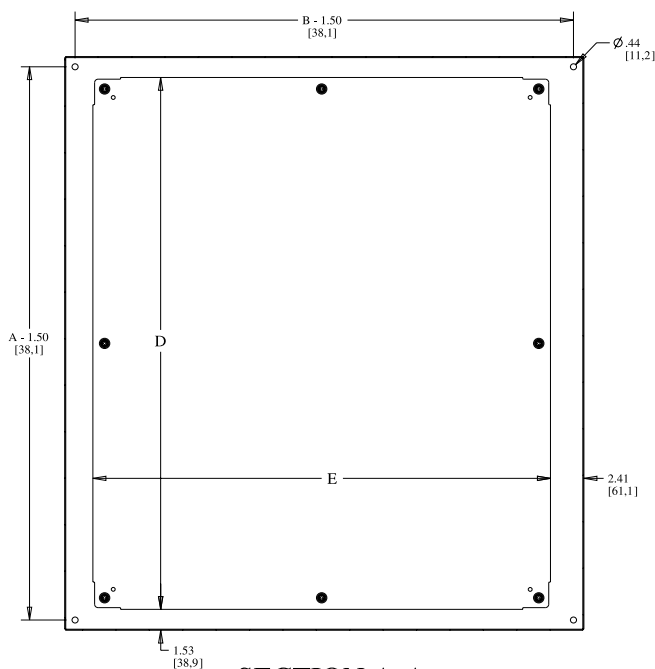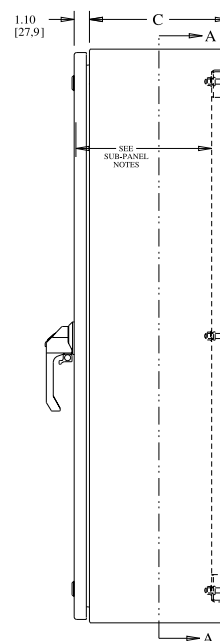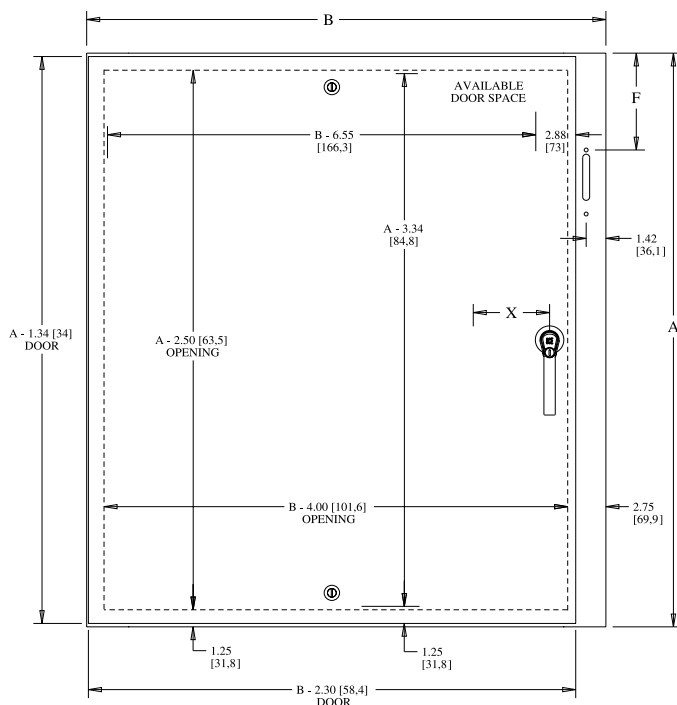

SECTION A-A

SUB-PANEL NOTES:

Dimensions are from the inside of the door.

C + .32 [8.1] for flat sub-panels

C - .18 [4.5] for bent sub-panels

DISCONNECT NOTES:

F = 4.75 [121] when C = 8.00 [203]

F = 7.09 [180] when C = 10.00 [254]

F = 11.62 [295] when C = 12.00 [304]

F = 11.62 [295] when C = 16.00 [406]

F = 18.38 [467] for SCE-60XEL3712LP4

LATCH NOTES:

Omit center latch top and bottom of door when door width is ≤ 30.00 [762]

HANDLE NOTES:

On enclosures ≤ 42.00 [1067]

X = 5.50 [140] and use 5.00 [127]

padlocking handle with coin-proof.

On enclosures > 42.00 [1067]

X = 6.75 [171] and use 7.00 [178]

padlocking handle with coin-proof.

Enclosures with a height dimension < 40.00 [1016] have a 2-point door closing mechanism.

Enclosures with a height dimension of ≥ 40.00 [1016] have a 3-point door latching mechanism.

CONSTRUCTION NOTES:

Door will be 0.125 [3.1] thick material when enclosure height is ≥ 42.00 and door width is > 24.00

Stainless Steel Enviroline® Series Wall-Mount Sloping Top Disconnect Enclosures

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- 15 Degree Sloping Top.
- Stainless steel concealed hinges.
- Stainless steel coinproof/padlocking handle.
- 3-point latching mechanism.
- Removable print pocket on main door of disconnect enclosures.
- Oil & water resistant gasket.
- Mounting hardware, sealing washer and hole plug included.
- Black quarter turn latches as required.
- Ground stud on door and body.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.

Finish -

4 Brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12

STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT SLOPING TOP DISCONNECT ENCLOSURES

ENCLOSURE PRODUCT CODE S8						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-24XEL2510SSST	24.00	25.38	10.00	IS5	1,555.73	SCE-24P24	21.00	21.00	53.18
SCE-30XEL2510SSST	30.00	25.38	10.00	IS5	1,759.14	SCE-30P24	27.00	21.00	63.29
SCE-36XEL3110SSST	36.00	31.38	10.00	IS5	1,968.03	SCE-36P30	33.00	27.00	101.27
SCE-48XEL3716SSST	48.00	37.38	16.00	IS5	3,637.40	SCE-48P36	45.00	33.00	154.46
SCE-60XEL3716SSST	60.00	37.38	16.00	IS5	4,467.49	SCE-60P36	57.00	33.00	189.89




Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT SLOPING TOP DISCONNECT ENCLOSURES

TECHNICAL DATA

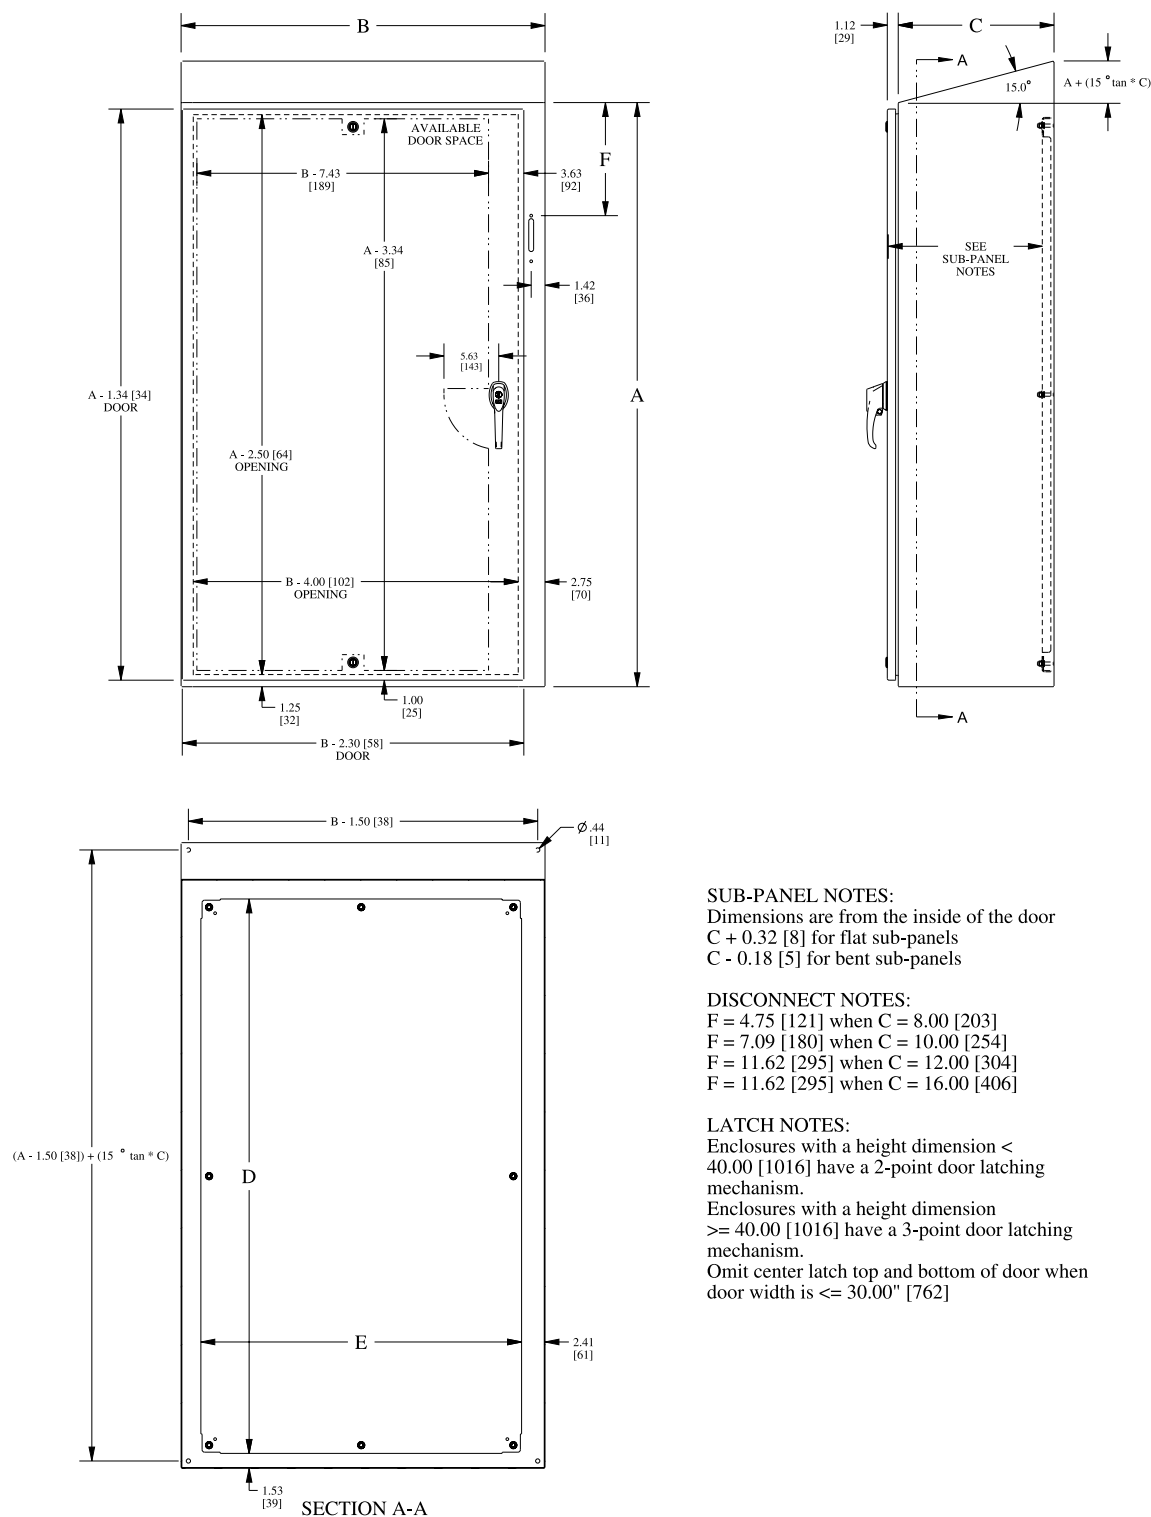

SUB-PANEL NOTES:

Dimensions are from the inside of the door
 $C + 0.32$ [8] for flat sub-panels
 $C - 0.18$ [5] for bent sub-panels

DISCONNECT NOTES:

$F = 4.75$ [121] when $C = 8.00$ [203]
 $F = 7.09$ [180] when $C = 10.00$ [254]
 $F = 11.62$ [295] when $C = 12.00$ [304]
 $F = 11.62$ [295] when $C = 16.00$ [406]

LATCH NOTES:

Enclosures with a height dimension < 40.00 [1016] have a 2-point door latching mechanism.
 Enclosures with a height dimension ≥ 40.00 [1016] have a 3-point door latching mechanism.
 Omit center latch top and bottom of door when door width is ≤ 30.00 [762]

304 & 316 Stainless Steel Clamp Fastened Enclosures For Flange-Mounted Disconnects

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com. For outdoor application a drip shield is recommended.

Construction -

- 0.075" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Stainless steel continuous hinge.
- Flange trough collar around all sides of door opening.
- Interior print pocket.
- Oil-resistant door gasket.
- Ground studs on door and body.
- Disconnect cutout provided on flange.
- Stainless steel clamps.
- No door stiffeners required.
- Collar studs provided for mounting optional sub-panels.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

304 STAINLESS STEEL CLAMP FASTENED ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

ENCLOSURE PRODUCT CODE S3						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-24HS2108SSLP	24.00	21.38	8.00	IS5	1,115.76	SCE-24P20	21.00	17.00	45.57
SCE-24HS2508SSLP	24.00	25.38	8.00	IS5	1,227.06	SCE-24P24	21.00	21.00	53.18
SCE-30HS2508SSLP	30.00	25.38	8.00	IS5	1,392.66	SCE-30P24	27.00	21.00	63.29
SCE-36HS2508SSLP	36.00	25.38	8.00	IS5	1,558.25	SCE-36P24	33.00	21.00	75.96
SCE-36HS3108SSLP	36.00	31.38	8.00	IS5	1,786.29	SCE-36P30	33.00	27.00	101.27
SCE-42HS3112SSLP	42.00	31.38	12.00	IS5	2,236.93	SCE-42P30	39.00	27.00	116.47
SCE-42HS3712SSLP	42.00	37.38	12.00	IS5	2,513.83	SCE-42P36	39.00	33.00	136.72
SCE-48HS3712SSLP	48.00	37.38	12.00	IS5	2,763.60	SCE-48P36	45.00	33.00	154.46
SCE-60HS3712SSLP	60.00	37.38	12.00	IS5	3,265.81	SCE-60P36	57.00	33.00	189.89

316 STAINLESS STEEL ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-24HS2108SS6LP	24.00	21.38	8.00	IS5	1,338.91	SCE-24P20	21.00	17.00	45.57
SCE-24HS2508SS6LP	24.00	25.38	8.00	IS5	1,472.47	SCE-24P24	21.00	21.00	53.18
SCE-30HS2508SS6LP	30.00	25.38	8.00	IS5	1,671.19	SCE-30P24	27.00	21.00	63.29
SCE-36HS2508SS6LP	36.00	25.38	8.00	IS5	1,869.90	SCE-36P24	33.00	21.00	75.96
SCE-36HS3108SS6LP	36.00	31.38	8.00	IS5	2,143.55	SCE-36P30	33.00	27.00	101.27
SCE-42HS3112SS6LP	42.00	31.38	12.00	IS5	2,684.32	SCE-42P30	39.00	27.00	116.47
SCE-42HS3712SS6LP	42.00	37.38	12.00	IS5	3,016.60	SCE-42P36	39.00	33.00	136.72
SCE-48HS3712SS6LP	48.00	37.38	12.00	IS5	3,316.32	SCE-48P36	45.00	33.00	154.46
SCE-60HS3712SS6LP	60.00	37.38	12.00	IS5	3,918.98	SCE-60P36	57.00	33.00	189.89

Available within 10 working days if not in stock






Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL CLAMP FASTENED ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

TECHNICAL DATA

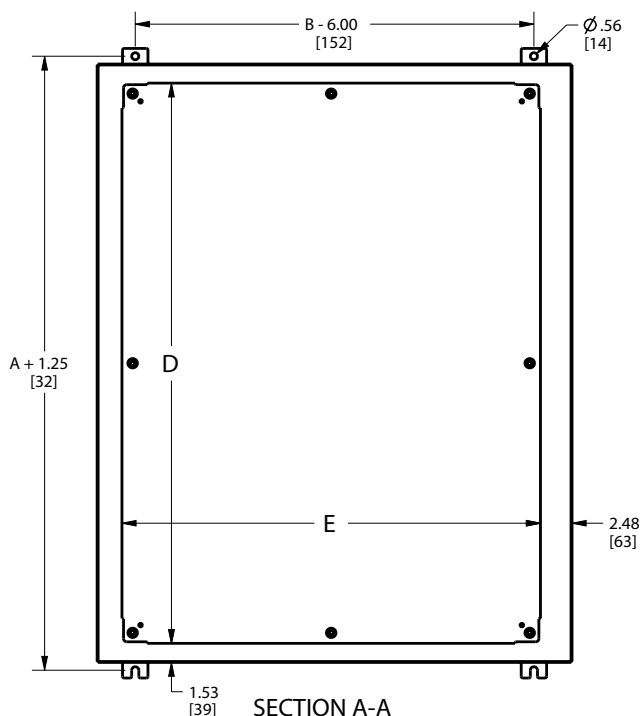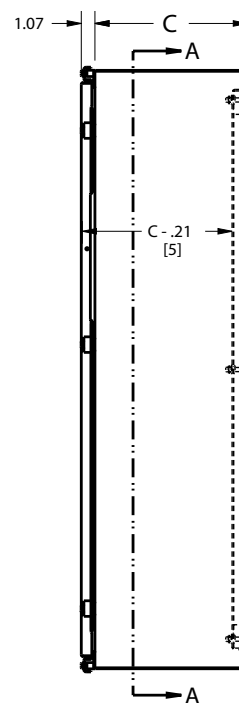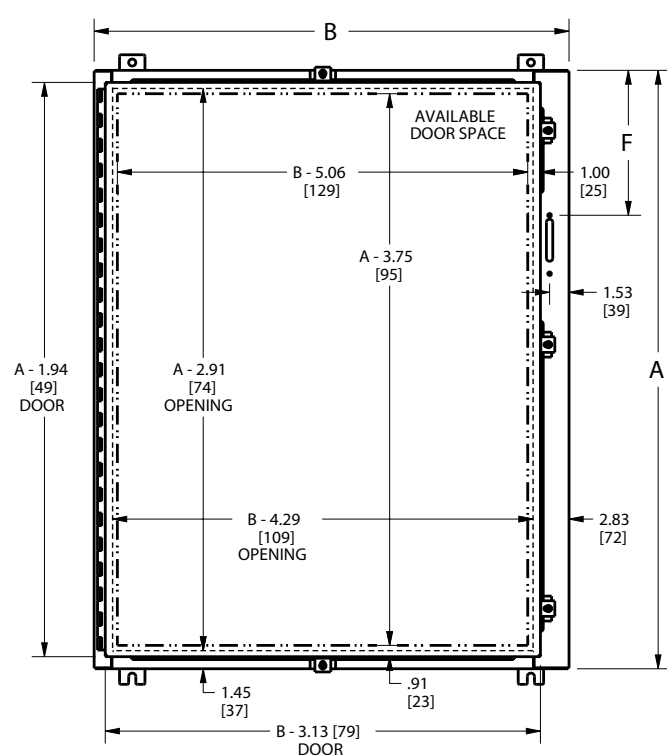

DISCONNECT NOTES:
F = 8.63 [219] when C = 8.00 [203]
F = 11.63 [295] when C = 12.00 [304]


CLAMPING NOTES:
Enclosures < 27.00 [686] in height require two clamps on door.
Enclosures ≥ 27.00 [686] in height require three clamps on door.
Omit center clamps top and bottom of door when door width is ≤ 30.00 [762]

NOTES


NOTES

Free-Standing & Floor-Mounted Enclosures (Stainless Steel)


Enviroline® Series Two Door Enclosures
(304 & 316 Stainless Steel) 242 – 243



Enviroline® Series Sloping Top Two-Door
Enclosures (Stainless Steel) 244 – 245



Enviroline® Series Single-Door Enclosures
(304 & 316 Stainless Steel) 246 – 247

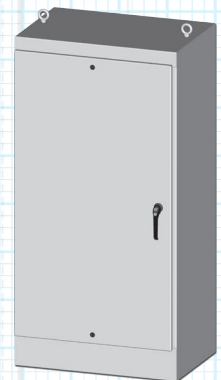

Free Standing Two-Door Enclosures
(304 & 316 Stainless Steel) 248 – 251




Phone (989) 799-6871
Fax (989) 799-4524




Free-Standing & Floor-Mounted Enclosures (Stainless Steel)


**Enviroline® Series Two-Door Enclosures
for Flange Mounted Disconnects
(304 & 316 Stainless Steel)252 – 253**



**Enviroline® Series Sloping Top Two-Door
Enclosures for Flange Mounted
Disconnects (Stainless Steel)254 – 255**



**Heavy Duty Free Standing Enclosures
for Flange Mounted Disconnects
One, Two, and Three Door Enclosures
(Stainless Steel).....256 – 261**

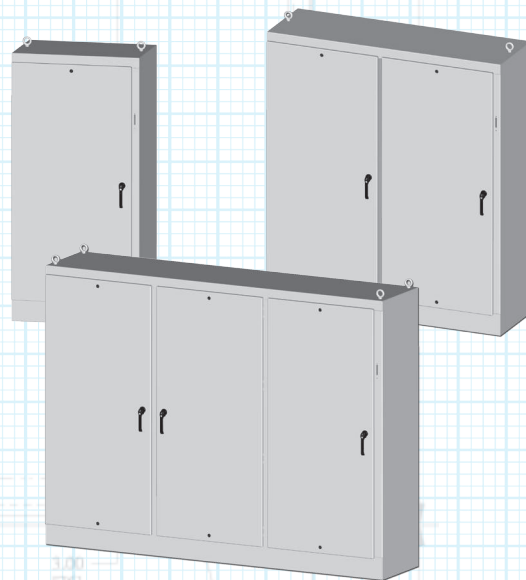

Stainless Steel EnviroLine® Series Two-Door Enclosures With 3-Point Hardware

Application -

Designed to house electrical and electronic controls, instrumentation and components in indoor & outdoor locations. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Removable center post.
- Heavy duty lifting eyes anchored into reinforced top.
- Body stiffeners.
- Black quarter turn latches as required.
- Stainless steel concealed hinges.
- Black keylocking/padlocking handles.
- 3-point latching mechanism.
- Removable print pocket on main door of disconnect enclosures.
- 12" removable floor stands.
- Panel supports.
- Provisions for mechanical interlock.
- Oil & water resistant gasket.
- Ground stud on door and body.

Options -

Provisions for mechanical interlock. See Accessory section to order.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

304 STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

ENCLOSURE PRODUCT CODE S4						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60EL4812SSLPPL	60.00	48.00	12.00	IS5	6,956.49	SCE-60P48	56.00	44.00	268.38
SCE-60EL4818SSLPPL	60.00	48.00	18.00	IS5	7,378.64	SCE-60P48	56.00	44.00	268.38
SCE-60EL6012SSLPPL	60.00	60.00	12.00	IS5	7,807.56	SCE-60P60	56.00	56.00	331.68
SCE-60EL6018SSLPPL	60.00	60.00	18.00	IS5	8,176.75	SCE-60P60	56.00	56.00	331.68
SCE-72EL6012SSLPPL	72.00	60.00	12.00	IS5	8,904.31	SCE-72P60	68.00	56.00	394.98
SCE-72EL6018SSLPPL	72.00	60.00	18.00	IS5	9,094.34	SCE-72P60	68.00	56.00	394.98
SCE-72EL7212SSLPPL	72.00	72.00	12.00	IS5	9,615.57	SCE-72P72	68.00	68.00	470.93
SCE-72EL7218SSLPPL	72.00	72.00	18.00	IS5	10,334.97	SCE-72P72	68.00	68.00	470.93
SCE-72EL7224SSLPPL	72.00	72.00	24.00	IS5	10,702.00	SCE-72P72	68.00	68.00	470.93

316 STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60EL4812SS6LPPL	60.00	48.00	12.00	IS5	8,347.79	SCE-60P48	56.00	44.00	268.38
SCE-60EL4818SS6LPPL	60.00	48.00	18.00	IS5	8,854.36	SCE-60P48	56.00	44.00	268.38
SCE-60EL6012SS6LPPL	60.00	60.00	12.00	IS5	9,369.07	SCE-60P60	56.00	56.00	331.68
SCE-60EL6018SS6LPPL	60.00	60.00	18.00	IS5	9,812.11	SCE-60P60	56.00	56.00	331.68
SCE-72EL6012SS6LPPL	72.00	60.00	12.00	IS5	10,685.17	SCE-72P60	68.00	56.00	394.98
SCE-72EL6018SS6LPPL	72.00	60.00	18.00	IS5	10,913.21	SCE-72P60	68.00	56.00	394.98
SCE-72EL7212SS6LPPL	72.00	72.00	12.00	IS5	11,538.68	SCE-72P72	68.00	68.00	470.93
SCE-72EL7218SS6LPPL	72.00	72.00	18.00	IS5	12,401.96	SCE-72P72	68.00	68.00	470.93
SCE-72EL7224SS6LPPL	72.00	72.00	24.00	IS5	12,842.40	SCE-72P72	68.00	68.00	470.93

Available within 10 working days if not in stock




Phone (989) 799-6871
Fax (989) 799-4524





STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

TECHNICAL DATA

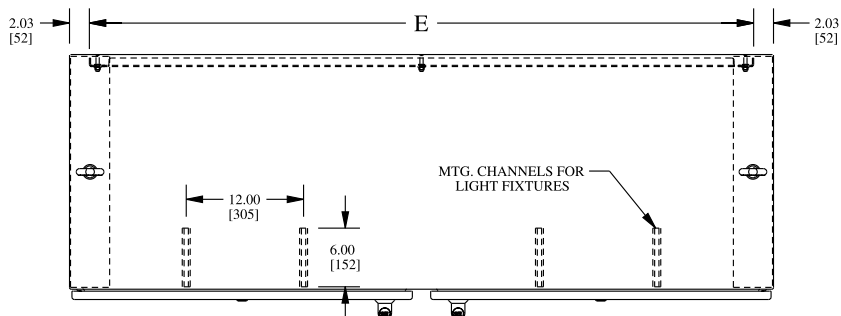

LATCH NOTE:
Omit center latch top and bottom of door when door width is < 30.00 [762]

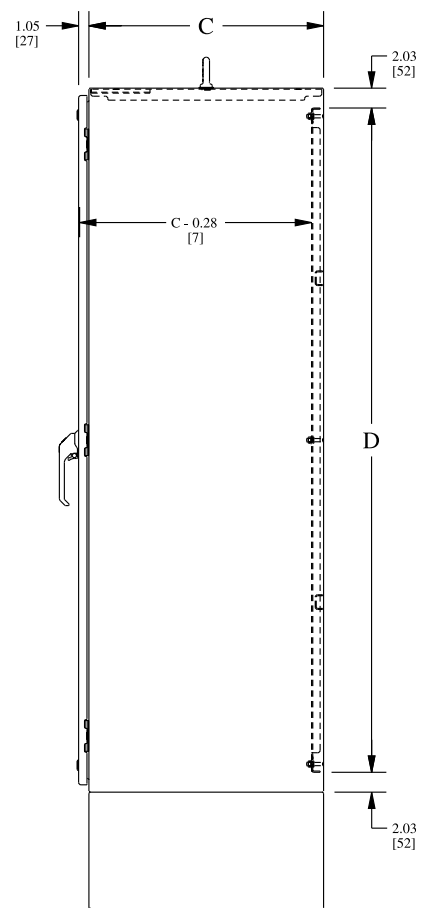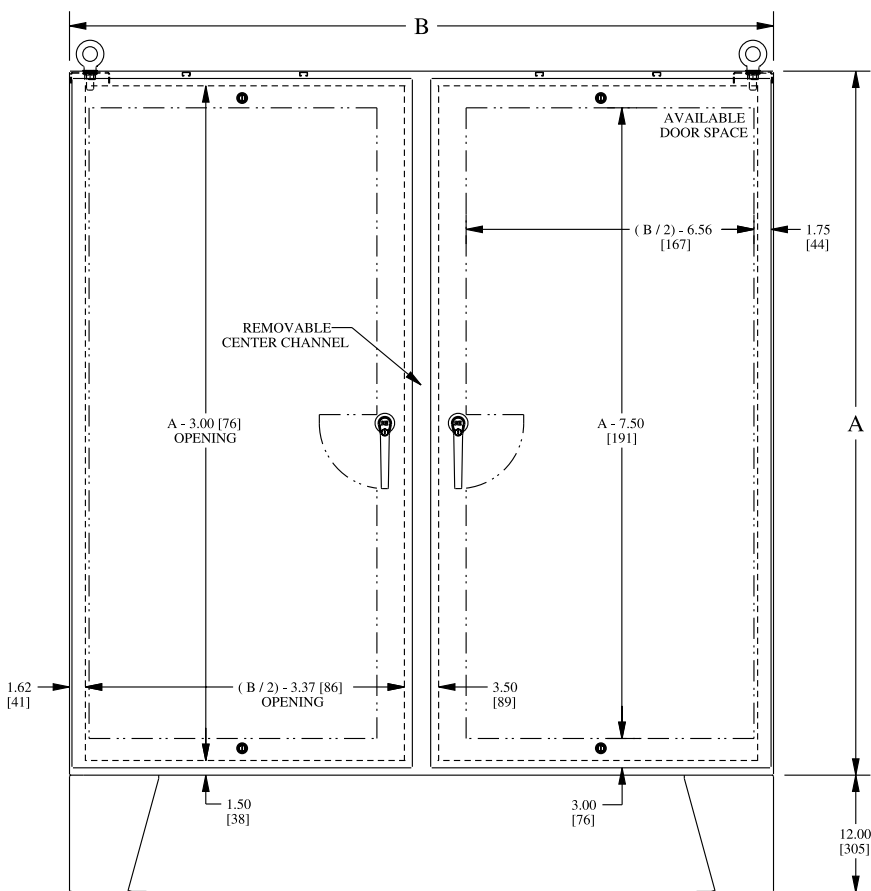

Stainless Steel Enviroline® Series Two-Door Sloping Top Enclosures

Application -

Designed to house electrical and electronic controls, instrumentation and components in indoor, outdoor and sanitary locations. For Installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- 15 Degree Sloping Top.
- Removable center post.
- Heavy duty lifting eyes anchor into reinforced top.
- Body stiffeners.
- Black quarter turn latches as required.
- Stainless steel concealed hinges.
- Stainless steel padlocking handles.
- 3-point latching mechanism.
- Removable print pocket on main door of disconnect enclosures.
- Provisions for floor stands.
- Panel supports.
- Oil & water resistant gasket.
- Ground stud on door and body.

Finish -

#4 brushed finish on all exterior surfaces.
Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR SLOPING TOP ENCLOSURES


ENCLOSURE PRODUCT CODE S8						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60EL4812SSST	60.00	48.00	12.00	IS5	9,739.09	SCE-60P48	56.00	44.00	268.38
SCE-60EL4818SSST	60.00	48.00	18.00	IS5	10,330.10	SCE-60P48	56.00	44.00	268.38
SCE-60EL6012SSST	60.00	60.00	12.00	IS5	10,930.58	SCE-60P60	56.00	56.00	331.68
SCE-60EL6018SSST	60.00	60.00	18.00	IS5	11,447.45	SCE-60P60	56.00	56.00	331.68
SCE-72EL6012SSST	72.00	60.00	12.00	IS5	12,466.03	SCE-72P60	68.00	56.00	394.98
SCE-72EL6018SSST	72.00	60.00	18.00	IS5	12,732.08	SCE-72P60	68.00	56.00	394.98
SCE-72EL7212SSST	72.00	72.00	12.00	IS5	13,461.80	SCE-72P72	68.00	68.00	470.93
SCE-72EL7218SSST	72.00	72.00	18.00	IS5	14,468.96	SCE-72P72	68.00	68.00	470.93
SCE-72EL7224SSST	72.00	72.00	24.00	IS5	14,982.80	SCE-72P72	68.00	68.00	470.93



Phone (989) 799-6871
Fax (989) 799-4524





STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR SLOPING TOP ENCLOSURES TECHNICAL DATA

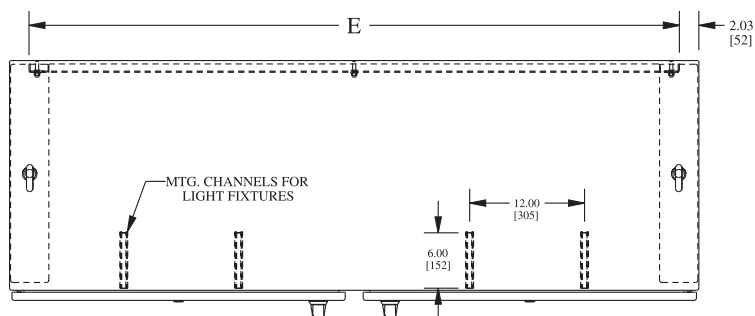

LATCH NOTE:

Omit center latch top and bottom of door when door width is < 30.00 [762]

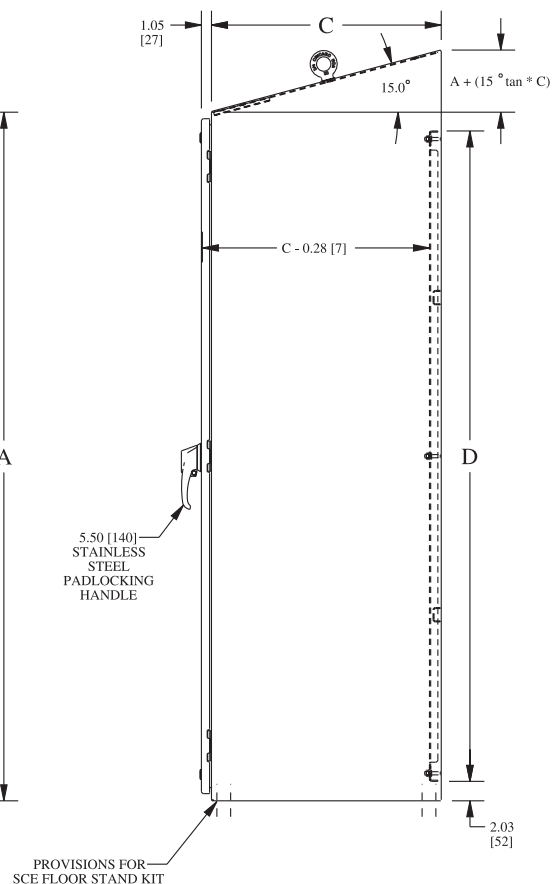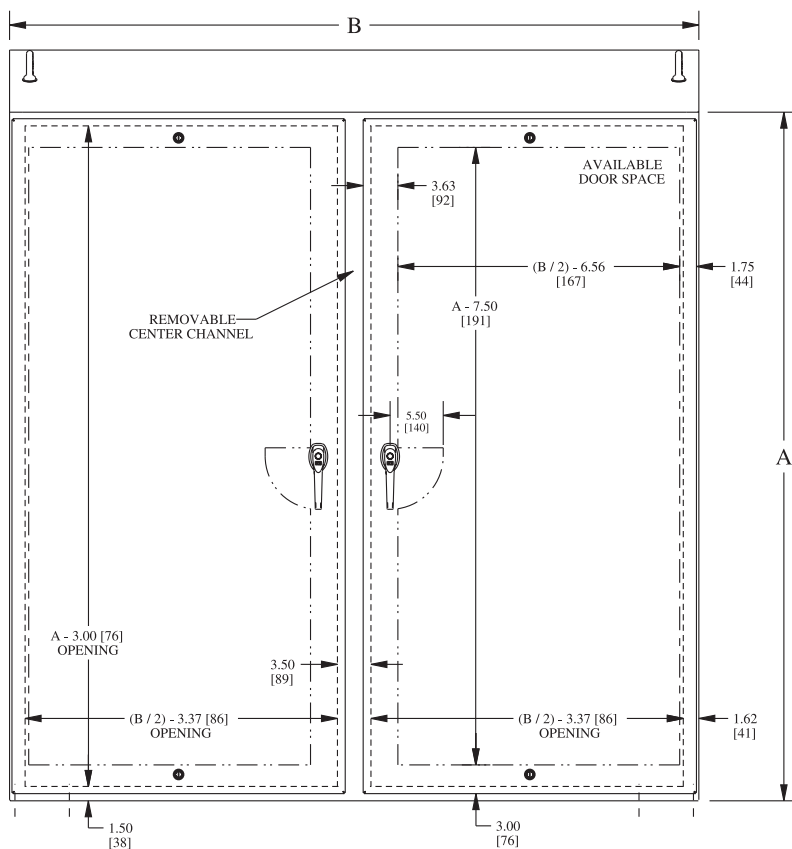

Stainless Steel Enviroline® Series Free-Standing Single-Door Enclosures

Application -

Designed to house electrical and electronic controls, instruments and components. Provides protection from dust, oil and water. For installation information, consult our Installation Manual at www.saginawcontrol.com. For outdoor application a drip shield is recommended.

Construction -

- 0.104" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Oil-resistant gasket.
- Flange trough collar around all sides of door opening.
- Stainless steel concealed hinge.
- Black zinc die cast keylocking/padlocking handle.
- Removable and interchangeable doors.
- Black quarter turn latches as required.
- Removable print pocket.
- Lifting eyes for easy handling.
- Ground studs on door and body.
- Mounting channels welded horizontally on sides of interior body at top, bottom and middle for mounting optional panels or rack mounting angles.
- No door stiffeners required.

Finish -

#4 brushed finish on all exterior surfaces. Optional panels are powder coated white.

Accessories - See pages 116-123

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

304 STAINLESS STEEL ENVIROLINE® SERIES SINGLE-DOOR SINGLE-ACCESS ENCLOSURES

ENCLOSURE PRODUCT CODE S4					
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price
SCE-60EL2418SSFS	60.00	24.00	18.00	IS6	4,239.55
SCE-60EL3624SSFS	60.00	36.00	24.00	IS6	5,108.64
SCE-72EL2418SSFS	72.00	24.00	18.00	IS6	4,502.73
SCE-72EL2424SSFS	72.00	24.00	24.00	IS6	4,849.77
SCE-72EL3018SSFS	72.00	30.00	18.00	IS6	4,833.41
SCE-72EL3024SSFS	72.00	30.00	24.00	IS6	5,367.27
SCE-72EL3618SSFS	72.00	36.00	18.00	IS6	5,345.91
SCE-72EL3624SSFS	72.00	36.00	24.00	IS6	5,981.36
SCE-72EL3630SSFS	72.00	36.00	30.00	IS6	6,616.82
SCE-72EL3636SSFS	72.00	36.00	36.00	IS6	7,252.27
SCE-90EL2420SSFS	90.00	24.00	20.00	IS6	5,325.00
SCE-90EL3620SSFS	90.00	36.00	20.00	IS6	6,618.18
SCE-90EL3624SSFS	90.00	36.00	24.00	IS6	7,188.18
SCE-90EL3636SSFS	90.00	36.00	36.00	IS6	8,386.82

316 STAINLESS STEEL ENVIROLINE® SERIES SINGLE-DOOR SINGLE-ACCESS ENCLOSURES

ENCLOSURE PRODUCT CODE S7					
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price
SCE-60EL2418SS6FS	60.00	24.00	18.00	IS6	5,087.45
SCE-60EL3624SS6FS	60.00	36.00	24.00	IS6	6,130.36
SCE-72EL2418SS6FS	72.00	24.00	18.00	IS6	5,403.27
SCE-72EL2424SS6FS	72.00	24.00	24.00	IS6	5,819.73
SCE-72EL3018SS6FS	72.00	30.00	18.00	IS6	5,800.09
SCE-72EL3024SS6FS	72.00	30.00	24.00	IS6	6,440.73
SCE-72EL3618SS6FS	72.00	36.00	18.00	IS6	6,415.09
SCE-72EL3624SS6FS	72.00	36.00	24.00	IS6	7,177.64
SCE-72EL3630SS6FS	72.00	36.00	30.00	IS6	7,940.18
SCE-72EL3636SS6FS	72.00	36.00	36.00	IS6	8,702.73
SCE-90EL2420SS6FS	90.00	24.00	20.00	IS6	6,390.00
SCE-90EL3620SS6FS	90.00	36.00	20.00	IS6	7,941.82
SCE-90EL3624SS6FS	90.00	36.00	24.00	IS6	8,625.82
SCE-90EL3636SS6FS	90.00	36.00	36.00	IS6	10,064.18



Available within 10 working days if not in stock


Phone (989) 799-6871
Fax (989) 799-4524






STAINLESS STEEL ENVIROLINE® SERIES

FREE-STANDING SINGLE-DOOR SINGLE-ACCESS ENCLOSURES

TECHNICAL DATA



LATCH NOTE:
OMIT CENTER LATCH TOP
AND BOTTOM OF DOOR WHEN
DOOR WIDTH IS < 30.00 [762]

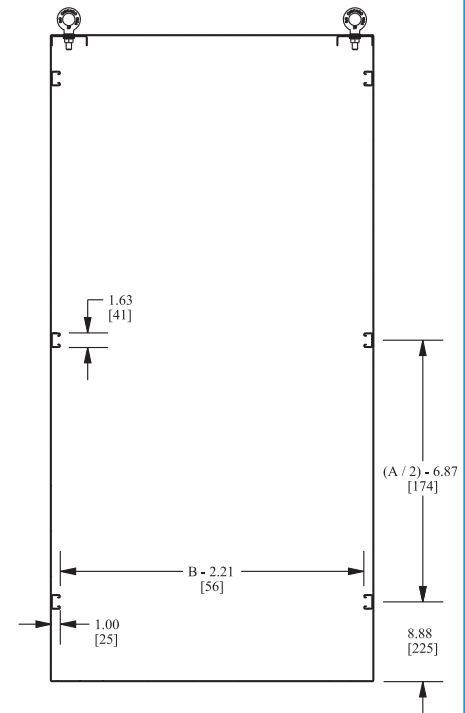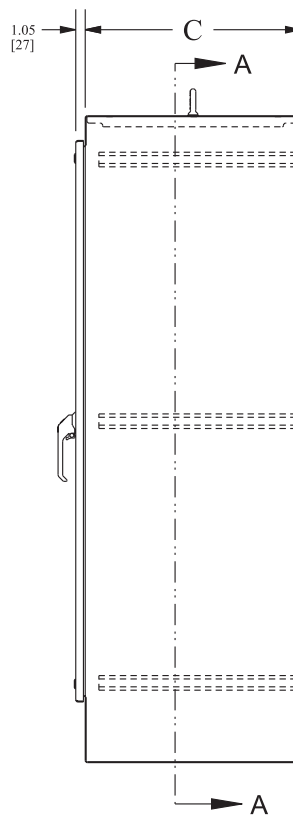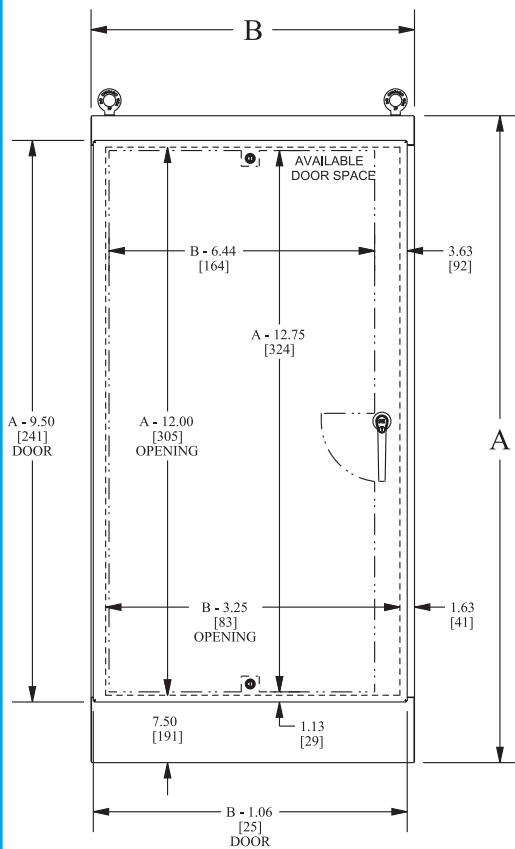

SECTION A-A

Stainless Steel Enviroline® Series Free-Standing Two-Door Enclosures

Application -

Designed to house a variety of electrical and electronic controls and instruments. Provisions for optional surface mounting or rack mounting of almost any type of equipment. Provides protection from dust, dirt, water and oil. The enclosures are extra deep for applications requiring more interior space.

Construction -

- 0.104" Stainless Steel Type 304 & 316/316L.
- Removable and interchangeable doors.
- Concealed hinge.
- Seams continuously welded and ground smooth.
- Strong, rigid construction with stiffeners welded on backs of single access boxes.
- Lifting eyes for easy handling.
- Black zinc die cast keylocking/padlocking handle.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Latch rods have rollers for easier door closing.
- Flange trough collar around all sides of door opening.
- Removable center post.
- Removable print pocket.
- Mounting channels welded horizontally on sides of interior body at top, bottom and middle for mounting optional panels or rack mounting angles.
- Oil resistant gasket.
- Ground stud on door.
- Provisions for light kit.

Finish -

#4 brushed finish on all exterior surfaces. Optional panels are powder coated white.

Accessories - See pages 116-123

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

304 STAINLESS STEEL ENVIROLINE® SERIES FREE-STANDING TWO-DOOR ENCLOSURES

ENCLOSURE PRODUCT CODE S4					
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price
SCE-60EL4818SSFSD	60.00	48.00	18.00	IS5	8,019.42
SCE-72EL4818SSFSD	72.00	48.00	18.00	IS5	8,840.69
SCE-72EL4824SSFSD	72.00	48.00	24.00	IS5	9,521.55
SCE-72EL6018SSFSD	72.00	60.00	18.00	IS5	9,861.99
SCE-72EL6024SSFSD	72.00	60.00	24.00	IS5	10,615.02
SCE-72EL6036SSFSD	72.00	60.00	36.00	IS5	12,110.83
SCE-72EL7218SSFSD	72.00	72.00	18.00	IS5	10,906.00
SCE-72EL7224SSFSD	72.00	72.00	24.00	IS5	11,731.26
SCE-90EL4820SSFSD	90.00	48.00	20.00	IS5	10,321.52
SCE-90EL7220SSFSD	90.00	72.00	20.00	IS5	12,820.70
SCE-90EL7224SSFSD	90.00	72.00	24.00	IS5	13,429.38
SCE-90EL7236SSFSD	90.00	72.00	36.00	IS5	15,275.91

316 STAINLESS STEEL ENVIROLINE® SERIES FREE-STANDING TWO-DOOR ENCLOSURES

ENCLOSURE PRODUCT CODE S7					
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price
SCE-60EL4818SS6FSD	60.00	48.00	18.00	IS5	9,623.31
SCE-72EL4818SS6FSD	72.00	48.00	18.00	IS5	10,608.83
SCE-72EL4824SS6FSD	72.00	48.00	24.00	IS5	11,425.87
SCE-72EL6018SS6FSD	72.00	60.00	18.00	IS5	11,834.39
SCE-72EL6024SS6FSD	72.00	60.00	24.00	IS5	12,738.03
SCE-72EL6036SS6FSD	72.00	60.00	36.00	IS5	14,533.00
SCE-72EL7218SS6FSD	72.00	72.00	18.00	IS5	13,087.20
SCE-72EL7224SS6FSD	72.00	72.00	24.00	IS5	14,077.51
SCE-90EL4820SS6FSD	90.00	48.00	20.00	IS5	12,385.82
SCE-90EL7220SS6FSD	90.00	72.00	20.00	IS5	15,384.84
SCE-90EL7224SS6FSD	90.00	72.00	24.00	IS5	16,115.26
SCE-90EL7236SS6FSD	90.00	72.00	36.00	IS5	18,331.10




Available within 10 working days if not in stock

Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES FREE-STANDING TWO-DOOR ENCLOSURES TECHNICAL DATA

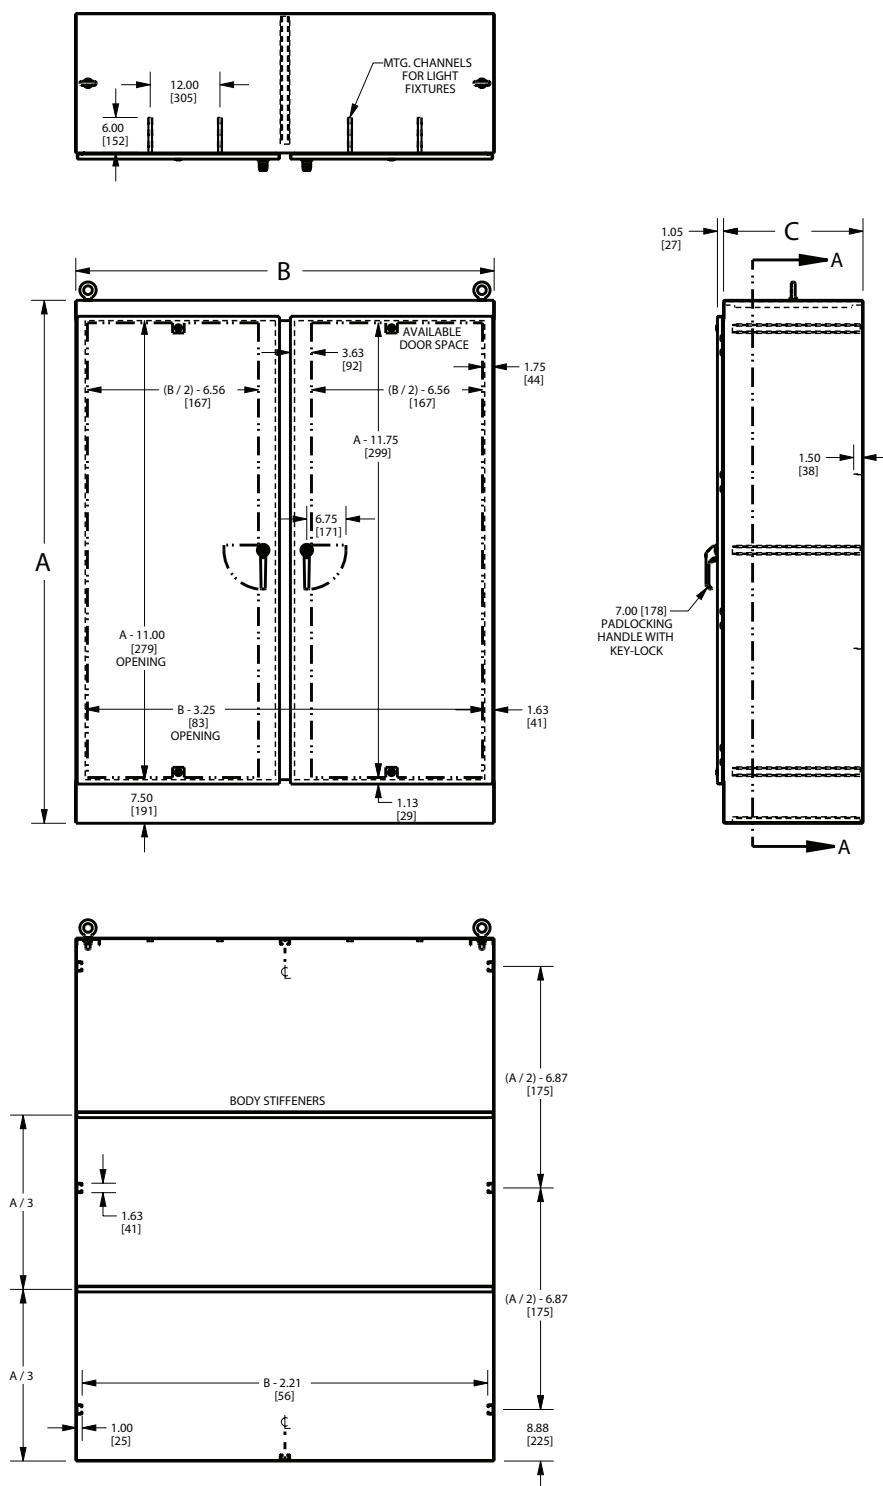

SECTION A-A

Stainless Steel Free-Standing Enclosures

Application -

Designed to house a variety of electrical and electronic controls and instruments. Provisions for optional surface mounting or rack mounting of almost any type of equipment. Provides protection from dust, dirt, water and oil. The enclosures are extra deep for applications requiring more interior space.

Construction -

- 0.104" stainless steel Type 304.
- Removable and interchangeable doors.
- Concealed hinge.
- Seams continuously welded and ground smooth.
- Strong, rigid construction with stiffeners welded on backs of single access boxes.
- Lifting eyes for easy handling.
- Black zinc die cast keylocking/padlocking handle.
- 3-point latching mechanism.
- Latch rods have rollers for easier door closing.
- Flange trough collar around all sides of door opening.
- Removable print pocket provided on door with 3-point latch.
- Mounting channels welded horizontally on sides of interior body at top, bottom and middle for mounting optional panels or rack mounting angles.
- Oil resistant gasket.
- Ground stud on door.

Finish -

Type 304 stainless steel with #4 brushed finish. Optional panels are powder coated white.

Accessories - See pages 116-123

IS3 - Industry Standards -


NEMA Type 3R, 12 & Type 13
UL Listed Type 3R & 12
CSA Type 3R & 12
IEC 60529 IP 55

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

STAINLESS STEEL FREE-STANDING TWO-DOOR SINGLE ACCESS ENCLOSURES

ENCLOSURE PRODUCT CODE S7					
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price
SCE-604818SSFSD	60.00	48.00	18.00	IS3	7,417.15
SCE-724818SSFSD	72.00	48.00	18.00	IS3	8,170.24
SCE-724824SSFSD	72.00	48.00	24.00	IS3	8,851.10
SCE-726018SSFSD	72.00	60.00	18.00	IS3	9,191.54
SCE-726024SSFSD	72.00	60.00	24.00	IS3	9,944.57
SCE-726036SSFSD	72.00	60.00	36.00	IS3	11,440.38
SCE-727218SSFSD	72.00	72.00	18.00	IS3	10,212.82
SCE-727224SSFSD	72.00	72.00	24.00	IS3	11,038.08
SCE-904820SSFSD	90.00	48.00	20.00	IS3	9,562.88
SCE-907220SSFSD	90.00	72.00	20.00	IS3	12,059.34
SCE-907224SSFSD	90.00	72.00	24.00	IS3	12,668.02
SCE-907236SSFSD	90.00	72.00	36.00	IS3	14,514.55

Available within 10 working days if not in stock

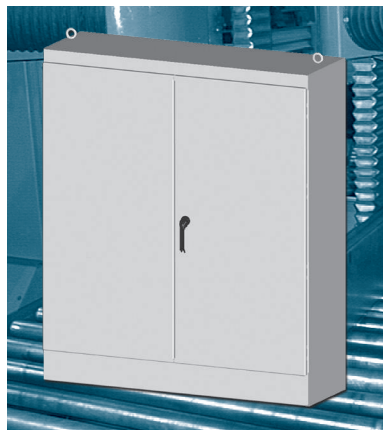


Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL FREE-STANDING TWO-DOOR SINGLE ACCESS ENCLOSURES

TECHNICAL DATA

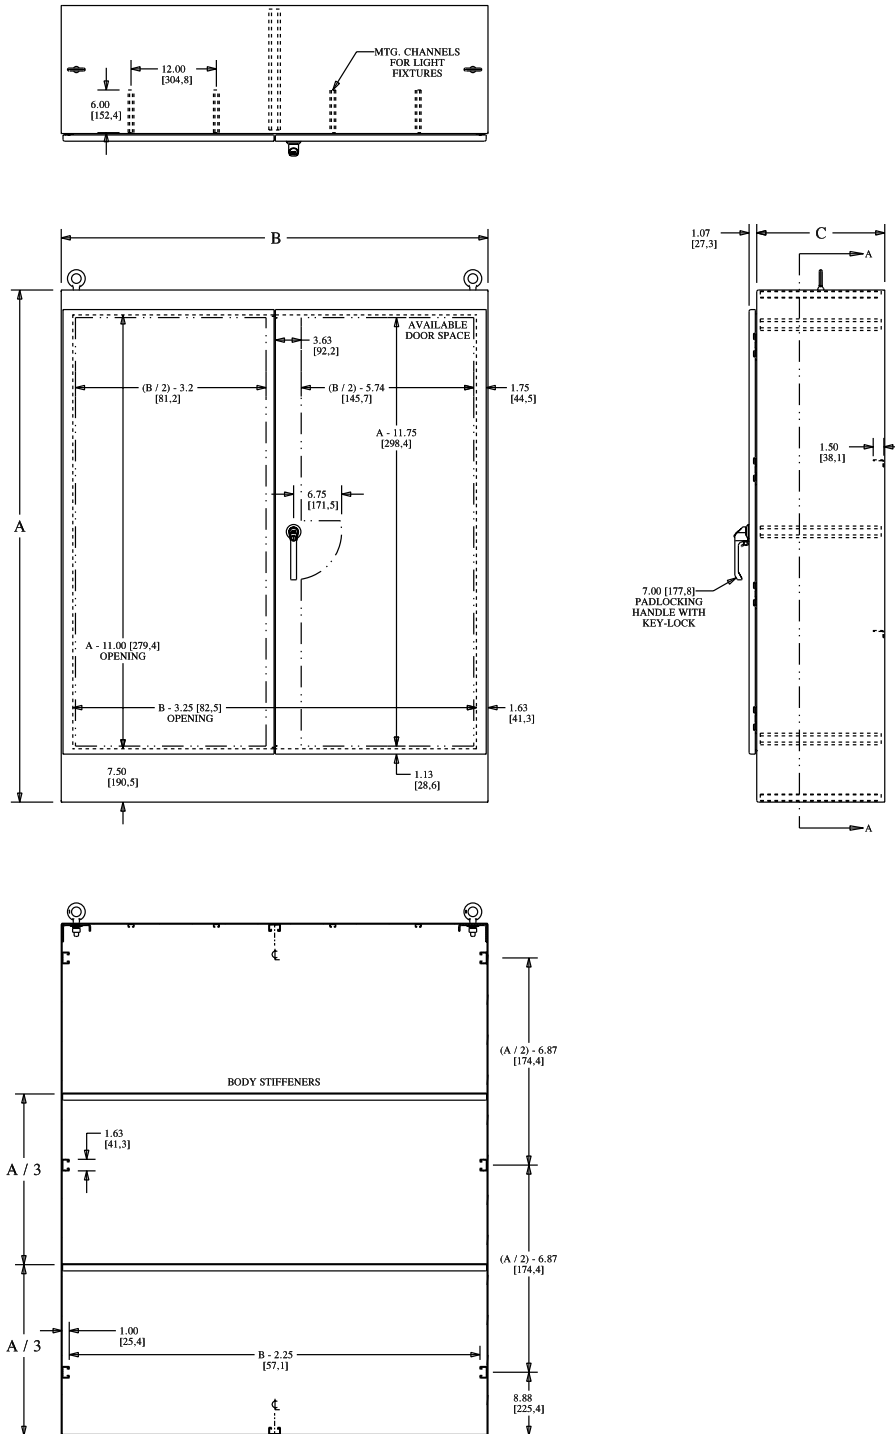

SECTION A-A

Enviroline® Series 304 & 316 Stainless Steel Two-Door Disconnect Enclosures

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com. For outdoor application a drip shield is recommended.

Construction -

- 0.104" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Oil-resistant gasket.
- Flange trough collar around all sides of door opening.
- Stainless steel concealed hinge.
- Removable and interchangeable doors.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Removable print pocket.
- Lifting eyes for easy handling.
- Ground studs on door and body.
- Collar studs provided for mounting optional sub-panels.
- 15" removable floor stands.
- Removable center post.
- Mechanical interlock.
- No door stiffeners required.
- Black zinc die cast coinproof/padlocking handle on main door of disconnect enclosures.
- Black zinc die cast padlocking handle on all other doors.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

304 STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

ENCLOSURE PRODUCT CODE S4						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60XEL4912SSLP	60.00	49.00	12.00	IS5	8,096.67	SCE-60P48	56.00	44.00	268.38
SCE-60XEL4918SSLP	60.00	49.00	18.00	IS5	8,820.15	SCE-60P48	56.00	44.00	268.38
SCE-60XEL6112SSLP	60.00	61.00	12.00	IS5	9,053.63	SCE-60P60	56.00	56.00	331.68
SCE-60XEL6118SSLP	60.00	61.00	18.00	IS5	9,859.88	SCE-60P60	56.00	56.00	331.68
SCE-72XEL6112SSLP	72.00	61.00	12.00	IS5	10,028.21	SCE-72P60	68.00	56.00	394.98
SCE-72XEL6118SSLP	72.00	61.00	18.00	IS5	10,894.21	SCE-72P60	68.00	56.00	394.98
SCE-72XEL7312SSLP	72.00	73.00	12.00	IS5	11,138.52	SCE-72P72	68.00	68.00	470.93
SCE-72XEL7318SSLP	72.00	73.00	18.00	IS5	11,571.56	SCE-72P72	68.00	68.00	470.93
SCE-72XEL7324SSLP	72.00	73.00	24.00	IS5	12,099.53	SCE-72P72	68.00	68.00	470.93

316 STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60XEL4912SS6LP	60.00	49.00	12.00	IS5	9,716.01	SCE-60P48	56.00	44.00	268.38
SCE-60XEL4918SS6LP	60.00	49.00	18.00	IS5	10,584.18	SCE-60P48	56.00	44.00	268.38
SCE-60XEL6112SS6LP	60.00	61.00	12.00	IS5	10,864.35	SCE-60P60	56.00	56.00	331.68
SCE-60XEL6118SS6LP	60.00	61.00	18.00	IS5	11,831.85	SCE-60P60	56.00	56.00	331.68
SCE-72XEL6112SS6LP	72.00	61.00	12.00	IS5	12,033.85	SCE-72P60	68.00	56.00	394.98
SCE-72XEL6118SS6LP	72.00	61.00	18.00	IS5	13,073.05	SCE-72P60	68.00	56.00	394.98
SCE-72XEL7312SS6LP	72.00	73.00	12.00	IS5	13,366.23	SCE-72P72	68.00	68.00	470.93
SCE-72XEL7318SS6LP	72.00	73.00	18.00	IS5	13,849.87	SCE-72P72	68.00	68.00	470.93
SCE-72XEL7324SS6LP	72.00	73.00	24.00	IS5	14,519.44	SCE-72P72	68.00	68.00	470.93

Available within 10 working days if not in stock




Phone (989) 799-6871
Fax (989) 799-4524





STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

TECHNICAL DATA

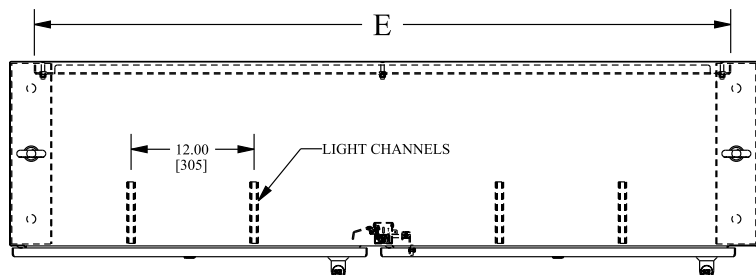

DISCONNECT NOTES:
 F= 7.88 [200] when A = 60.00 [1524]
 F= 13.38 [340] when A = 72.00 [1829]

LATCH NOTES:
 "EL" part numbers ≥ 30.00 [762]
 in width have additional latch centered
 top and bottom of door.

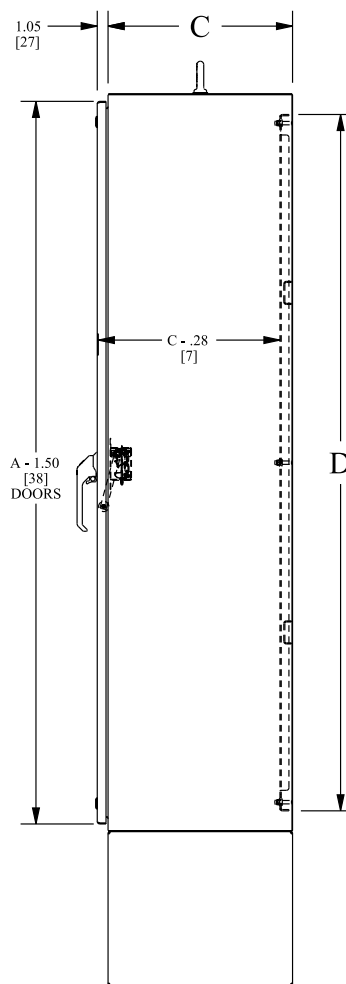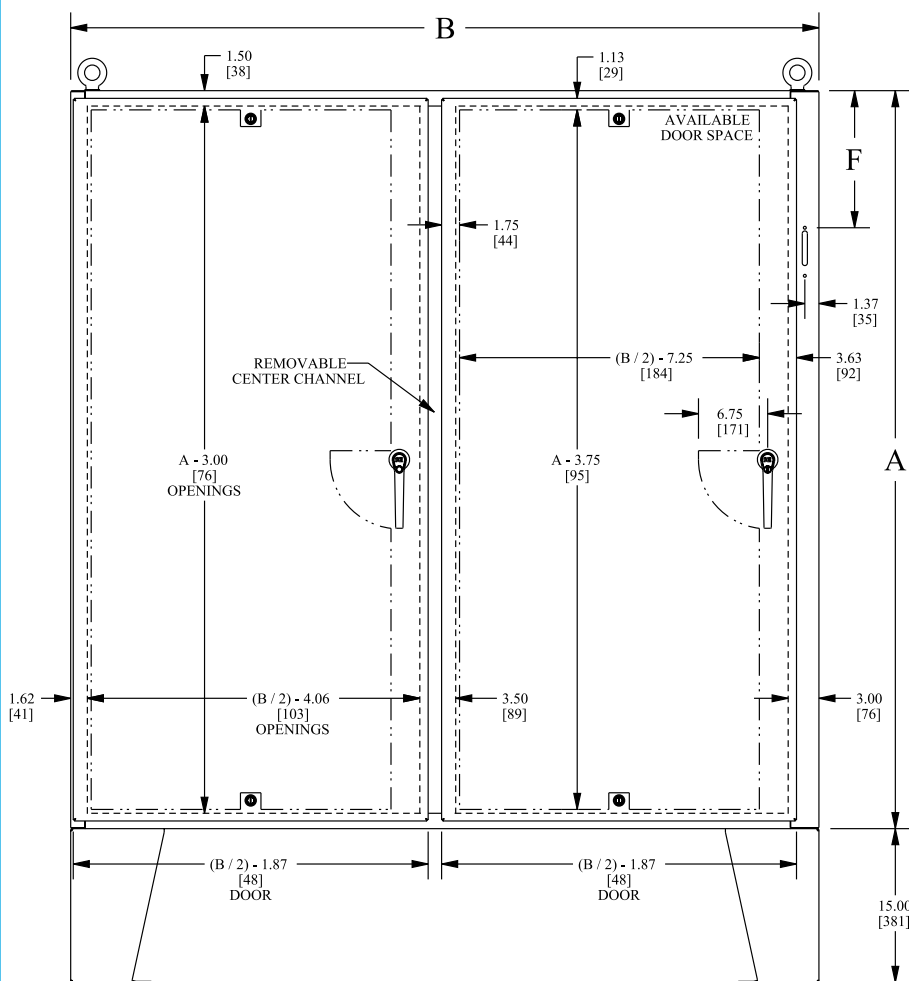

Stainless Steel Enviroline® Series Two-Door Sloping Top Disconnect Enclosures

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- 15 Degree Sloping Top.
- Removable center post.
- Heavy duty lifting eyes anchor into reinforced top.
- Body stiffeners.
- Stainless steel concealed hinges.
- Mechanical interlock.
- Stainless steel coinproof/padlocking handle on main door with stainless steel padlocking handle on slave doors.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Removable print pocket on main door of disconnect enclosures.
- Provisions for floor stands.
- Panel supports.
- Oil & water resistant gasket.
- Ground stud on door and body.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12

STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR SLOPING TOP DISCONNECT ENCLOSURES

ENCLOSURE PRODUCT CODE S8						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60XEL4912SSST	60.00	49.00	12.00	IS5	10,930.50	SCE-60P48	56.00	44.00	268.38
SCE-60XEL4918SSST	60.00	49.00	18.00	IS5	11,907.20	SCE-60P48	56.00	44.00	268.38
SCE-60XEL6112SSST	60.00	61.00	12.00	IS5	12,222.40	SCE-60P60	56.00	56.00	331.68
SCE-60XEL6118SSST	60.00	61.00	18.00	IS5	13,310.84	SCE-60P60	56.00	56.00	331.68
SCE-72XEL6112SSST	72.00	61.00	12.00	IS5	13,538.08	SCE-72P60	68.00	56.00	394.98
SCE-72XEL6118SSST	72.00	61.00	18.00	IS5	14,707.18	SCE-72P60	68.00	56.00	394.98
SCE-72XEL7312SSST	72.00	73.00	12.00	IS5	15,037.00	SCE-72P72	68.00	68.00	470.93
SCE-72XEL7318SSST	72.00	73.00	18.00	IS5	15,621.61	SCE-72P72	68.00	68.00	470.93
SCE-72XEL7324SSST	72.00	73.00	24.00	IS5	16,334.37	SCE-72P72	68.00	68.00	470.93




Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES

TWO-DOOR SLOPING TOP DISCONNECT ENCLOSURES

TECHNICAL DATA

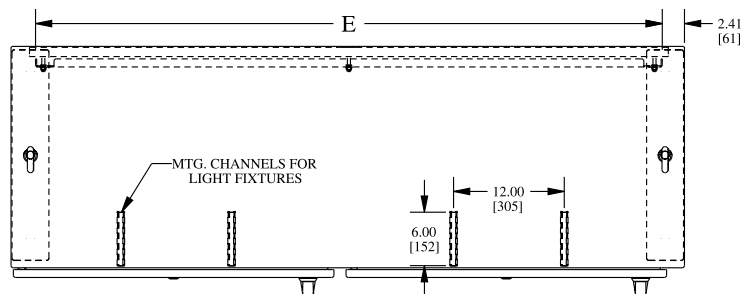



DISCONNECT NOTES:

F = 7.88 [200] when A = 60.00 [1524]

F = 13.38 [340] when A = 72.00 [1829]

LATCH NOTE:

Omit center latch top and bottom of door when door width is < 30.00 [762]

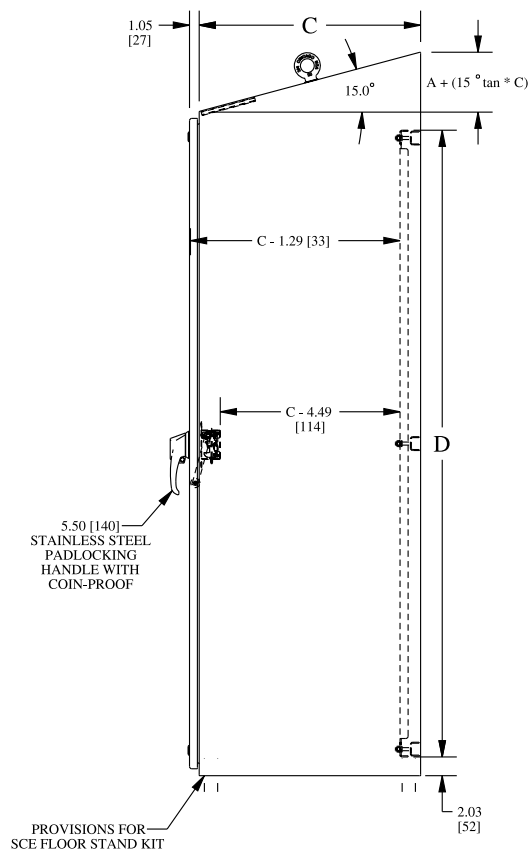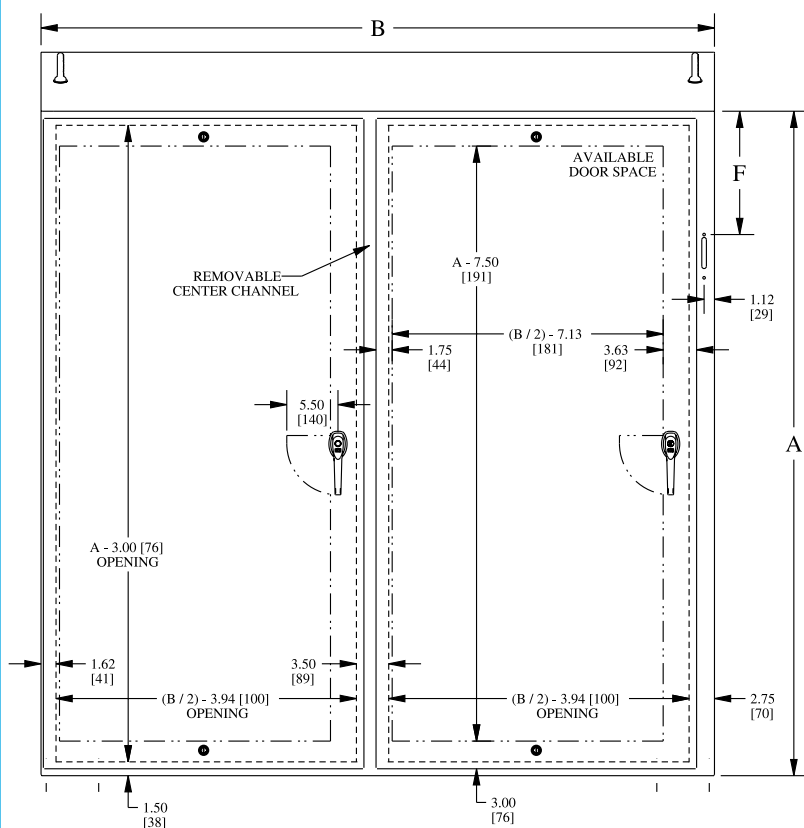

Heavy Duty Free-Standing Stainless Steel Enclosures For Flange-Mounted Disconnects

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Body stiffeners in large enclosures for extra rigidity.
- Heavy duty lifting eyes anchor into reinforced top.
- Stainless steel concealed hinges.
- Black zinc die cast coinproof/padlocking handle.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Panel supports.
- Large removable print pockets.
- Oil-resistant gasket.
- Removable sub-panels mount on collar studs.
- Defeater on master door requires a screwdriver to open.
- Ground stud on door.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with enclosure.

Finish -

#4 brushed finish on all exterior surfaces. Sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

HEAVY DUTY FREE-STANDING ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS SINGLE-DOOR STAINLESS STEEL ENCLOSURES

ENCLOSURE PRODUCT CODE S2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-72XM2818SS	72.00	27.50	18.00	IS5	5,635.10	SCE-64P25**	60.00	21.75	Included
SCE-72XM3418SS	72.00	33.50	18.00	IS5	6,245.44	SCE-64P31**	60.00	27.75	Included
SCE-72XM4018SS	72.00	39.50	18.00	IS5	6,855.82	SCE-64P37**	60.00	33.75	Included
SCE-84XM4018SS	84.00	39.50	18.00	IS5	7,620.90	SCE-76P37**	72.00	33.75	Included
SCE-84XM4024SS	84.00	39.50	24.00	IS5	7,835.81	SCE-76P37**	72.00	33.75	Included
SCE-90XM4018SS	90.00	39.50	18.00	IS5	8,162.50	SCE-82P37**	78.00	33.75	Included
SCE-90XM4020SS	90.00	39.50	20.00	IS5	8,450.48	SCE-82P37**	78.00	33.75	Included
SCE-90XM4024SS	90.00	39.50	24.00	IS5	8,738.46	SCE-82P37**	78.00	33.75	Included

Available within 10 working days if not in stock



****Sub-panel included with enclosure.**
Replacement panels can be ordered. Prices found in the accessory section.

Phone (989) 799-6871
Fax (989) 799-4524



HEAVY DUTY FREE-STANDING ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS TWO-DOOR STAINLESS STEEL ENCLOSURES

ENCLOSURE PRODUCT CODE S2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-72XM5418SS	72.00	53.75	18.00	IS5	9,890.44	SCE-64P52**	60.00	48.00	Included
SCE-72XM6618SS	72.00	65.75	18.00	IS5	11,145.52	SCE-64P64**	60.00	60.00	Included
SCE-72XM7818SS	72.00	77.75	18.00	IS5	12,396.34	SCE-64P76**	60.00	72.00	Included
SCE-72XM7824SS	72.00	77.75	24.00	IS5	13,286.12	SCE-64P76**	60.00	72.00	Included
SCE-84XM7818SS	84.00	77.75	18.00	IS5	13,758.93	SCE-76P76**	72.00	72.00	Included
SCE-84XM7824SS	84.00	77.75	24.00	IS5	13,930.86	SCE-76P76**	72.00	72.00	Included
SCE-90XM7818SS	90.00	77.75	18.00	IS5	14,691.64	SCE-82P76**	78.00	72.00	Included
SCE-90XM7820SS	90.00	77.75	20.00	IS5	14,777.60	SCE-82P76**	78.00	72.00	Included
SCE-90XM7824SS	90.00	77.75	24.00	IS5	15,418.09	SCE-82P76**	78.00	72.00	Included

Available within 10 working days if not in stock

**Sub-panel included with enclosure.
Replacement panels can be ordered. Prices
found in the accessory section.



Heavy Duty Free-Standing Stainless Steel Enclosures For Flange-Mounted Disconnects

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Body stiffeners in large enclosures for extra rigidity.
- Heavy duty lifting eyes anchor into reinforced top.
- Removable center posts permit easy sub-panel installation.
- Stainless steel concealed hinges.
- Black zinc die cast coinproof/padlocking handle on main door with black zinc die cast padlocking handle on slave doors.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Panel supports.
- Large removable print pockets.
- Oil-resistant gasket.
- Removable sub-panels mount on collar studs.
- Master door is far right-hand door on all enclosures.
- Defeater on master door requires a screwdriver to open.
- Mechanical interlock activated by master door prevents slave doors from being opened first. Doors can be closed in any order.
- Ground stud on door.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with enclosure.

Finish -

#4 brushed finish on all exterior surfaces.
Sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

Heavy Duty Free-Standing Stainless Steel Enclosures For Flange-Mounted Disconnects

Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Body stiffeners in large enclosures for extra rigidity.
- Heavy duty lifting eyes anchor into reinforced top.
- Removable center posts permit easy sub-panel installation.
- Stainless steel concealed hinges.
- Black zinc die cast coinproof/padlocking handle on main door with black zinc die cast padlocking handle on slave doors.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Panel supports.
- Large removable print pockets.
- Oil-resistant gasket.
- Removable sub-panels mount on collar studs.
- Master door is far right-hand door on all enclosures.
- Defeater on master door requires a screwdriver to open.
- Mechanical interlock activated by master door prevents slave doors from being opened first. Doors can be closed in any order.
- Ground stud on door.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with enclosure.

Finish -

#4 brushed finish on all exterior surfaces. Sub-panels are powder coated white.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

HEAVY DUTY FREE-STANDING ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS THREE-DOOR STAINLESS STEEL ENCLOSURES

ENCLOSURE PRODUCT CODE S2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-72XM3EQ18SS	72.00	99.50	18.00	IS5	14,816.33	SCE-64P31** &	60.00	27.75	Included
						SCE-64P64** &	60.00	60.00	Included
SCE-72XM3EW18SS	72.00	117.50	18.00	IS5	16,677.48	SCE-64P37** &	60.00	33.75	Included
						SCE-64P76** &	60.00	72.00	Included
SCE-84XM3EW18SS	84.00	117.50	18.00	IS5	18,594.54	SCE-76P37** &	72.00	33.75	Included
						SCE-76P76** &	72.00	72.00	Included
SCE-84XM3EW24SS	84.00	117.50	24.00	IS5	18,813.76	SCE-76P37** &	72.00	33.75	Included
						SCE-76P76** &	72.00	72.00	Included
SCE-90XM3EW24SS	90.00	117.50	24.00	IS5	20,748.01	SCE-82P37** &	78.00	33.75	Included
						SCE-82P76** &	78.00	72.00	Included

Available within 10 working days if not in stock



****Sub-panel included with enclosure.**
Replacement panels can be ordered. Prices found in the accessory section.


Phone (989) 799-6871
Fax (989) 799-4524



FREE-STANDING STAINLESS STEEL ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

TECHNICAL DATA

SINGLE-DOOR ENCLOSURE

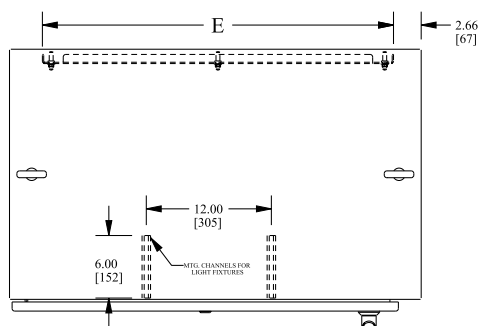

STANDARD DISCONNECTS:



F = 11.88 [301,7] when A = 72.00 [1828,8]

F = 17.38 [441,4] when A = 84.00 [2133,6]

F = 20.38 [517,6] when A = 90.00 [228,6]

LATCH NOTES:


Omit center latch top and bottom of door
when door width is < 30.00 [762]

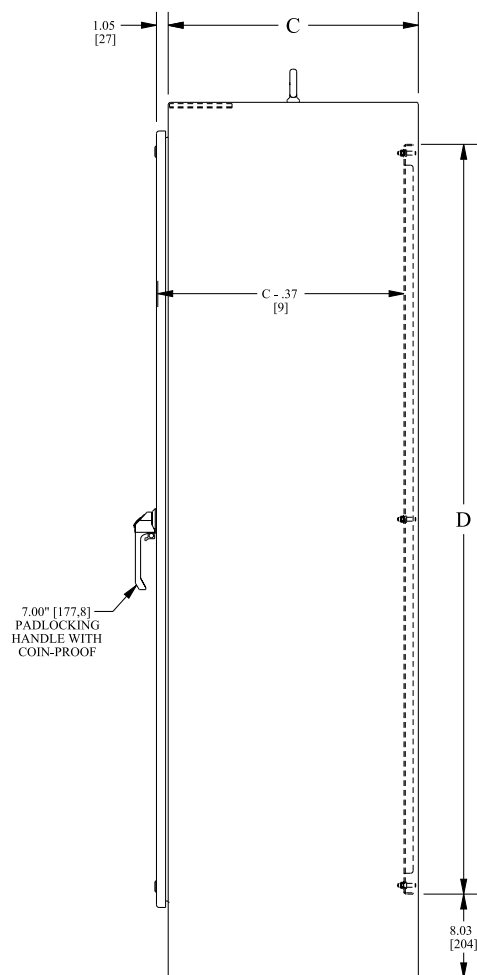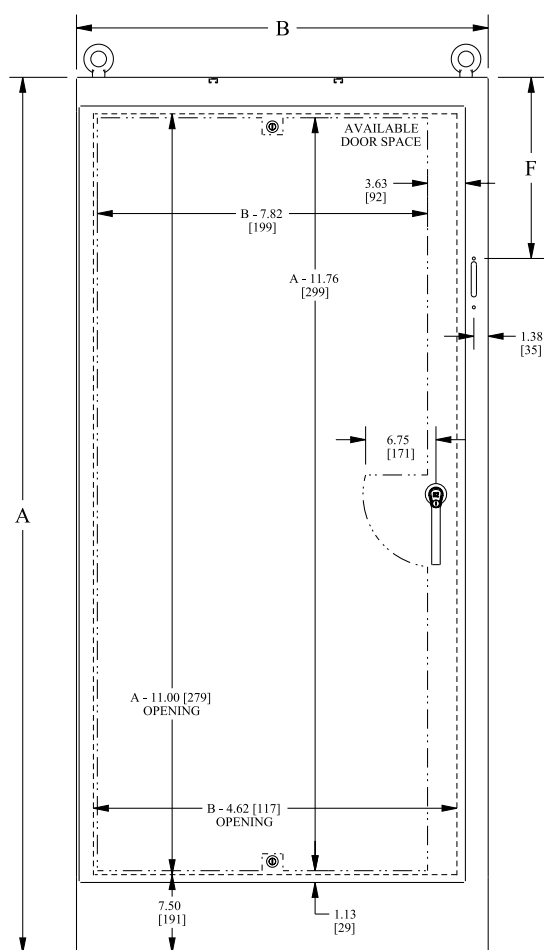

FREE-STANDING STAINLESS STEEL ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

TECHNICAL DATA

TWO-DOOR ENCLOSURE

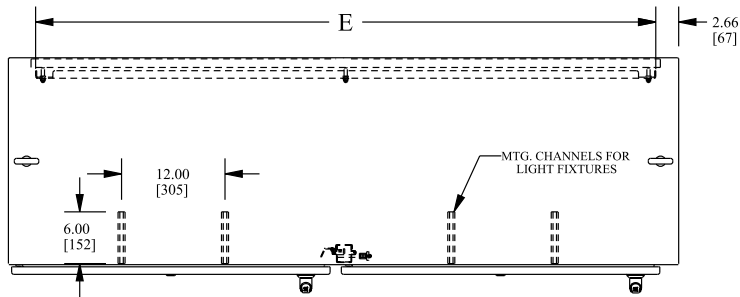

STANDARD DISCONNECTS:



F = 11.88 [301,7] when A = 72.00 [1828,8]

F = 17.38 [441,4] when A = 84.00 [2133,6]

F = 20.38 [517,6] when A = 90.00 [228,6]

LATCH NOTES:

Omit center latch top and bottom of door
when door width is < 30.00 [762]

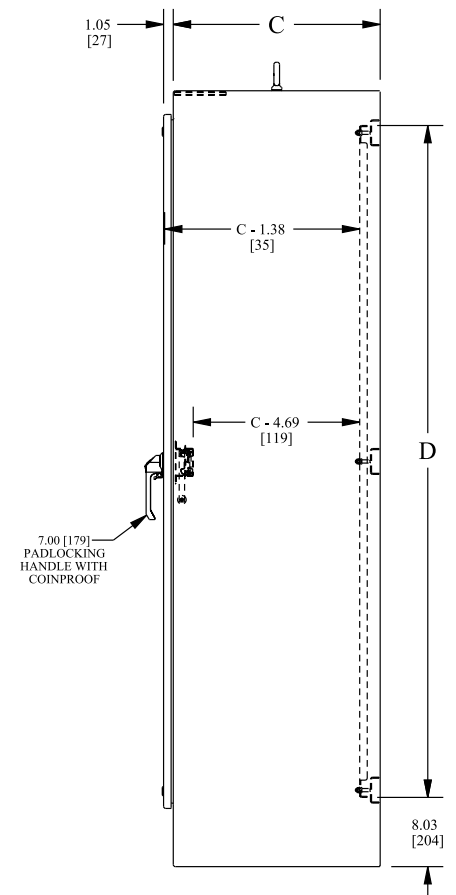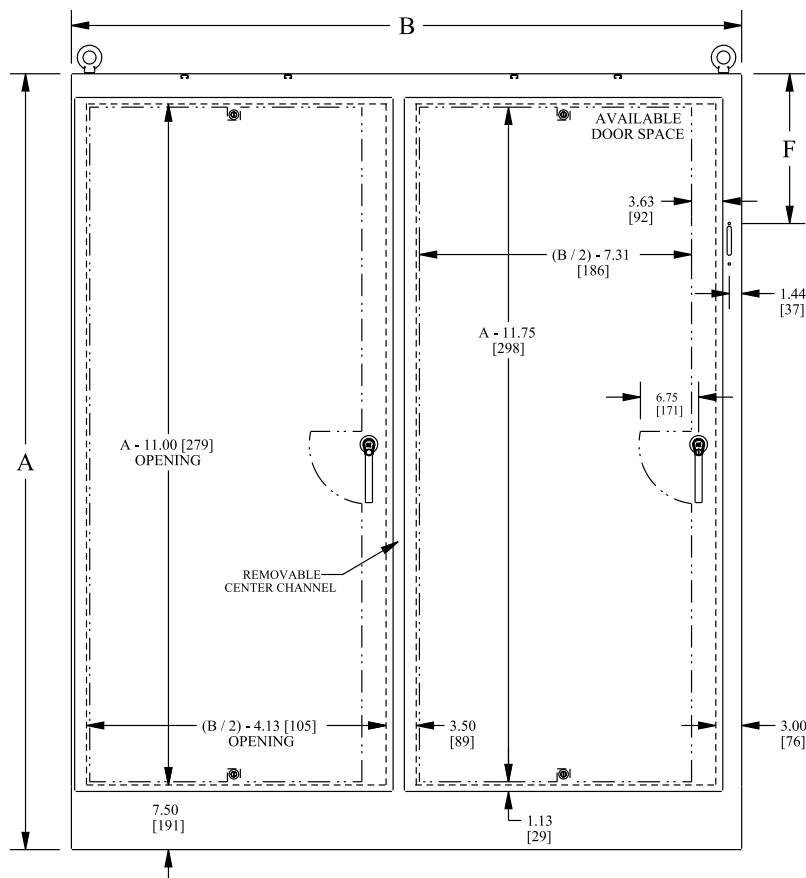

Phone (989) 799-6871


Fax (989) 799-4524

SCE SAGINAW
CONTROL &
ENGINEERING
Your Enclosure Source®

FREE-STANDING STAINLESS STEEL ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

TECHNICAL DATA

THREE-DOOR ENCLOSURE

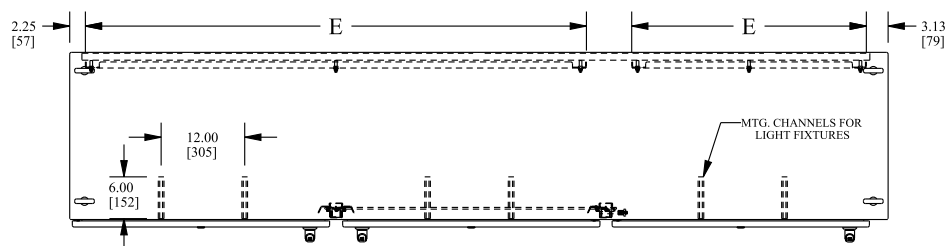

STANDARD DISCONNECTS:



F = 11.88 [301,7] when A = 72.00 [1828,8]

F = 17.38 [441,4] when A = 84.00 [2133,6]

F = 20.38 [517,6] when A = 90.00 [228,6]

LATCH NOTES:

Omit center latch top and bottom of door when door width is < 30.00 [762]

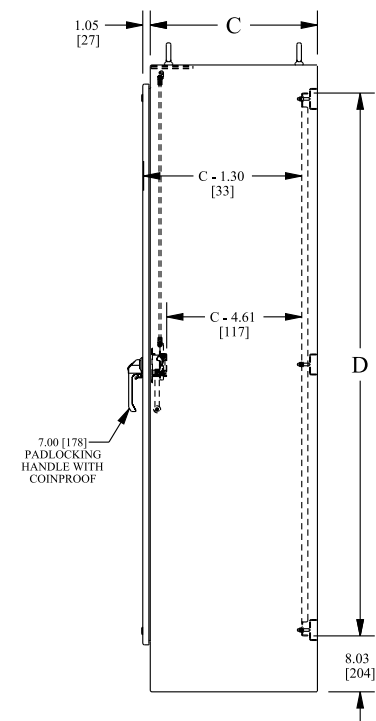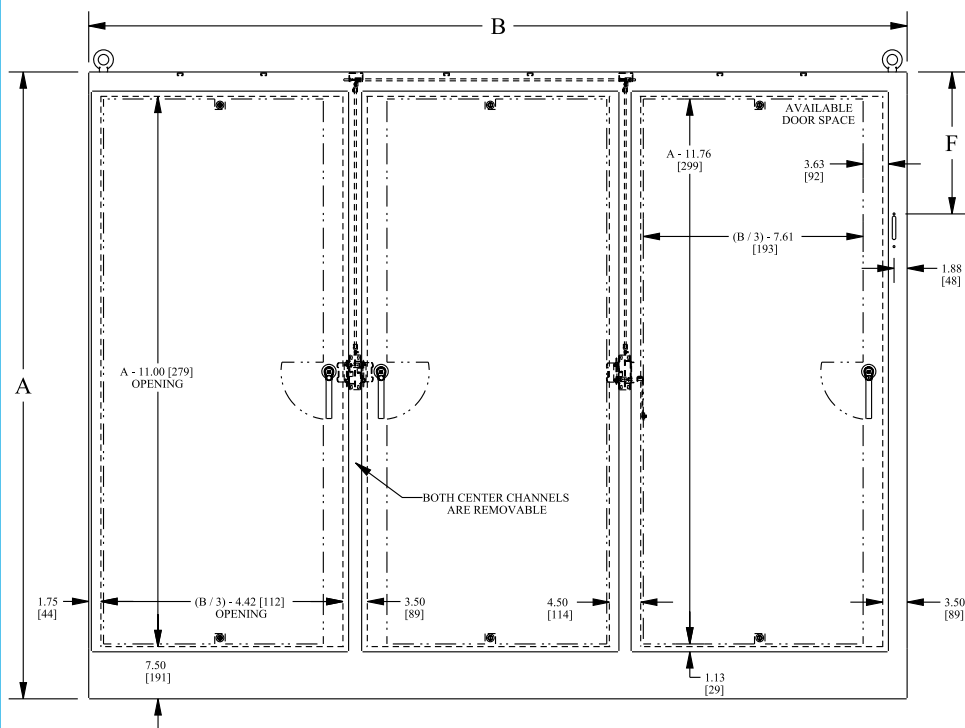

NOTES

NOTES

Fiberglass Enclosures

**Pushbutton Enclosures
(Fiberglass)**

266 – 267



**Screw Cover Junction Enclosures
(Fiberglass)**

268 – 269



**Quick Release Junction Enclosures
(Fiberglass)**

270 – 271



Fiberglass Enclosures

**Quick Release Junction Enclosures with Window
(Fiberglass).....272 – 273**



**Clamp Cover Enclosures
(Fiberglass).....274 – 275**



Fiberglass Pushbutton Enclosures

Application -

Designed for indoor or outdoor use to house pushbuttons, switches, and pilot lights in areas that may be regularly hosed down, are in very wet conditions, or are exposed to corrosive agents. Provides protection from dust, dirt, oil and water.

Construction -

- Fiberglass reinforced compression molded polyester.
- Continuous memory retaining gasket.
- Hole diameter is 1.20" (30.5 mm).

Finish -

Light gray fiberglass.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13

UL Listed Type 4, 4X & 12

CSA Type 4, 4X & 12

IEC 60529 IP 66

FIBERGLASS PUSHBUTTON ENCLOSURES

ENCLOSURE PRODUCT CODE F1						
Catalog No.	Height (A)	Width (B)	Depth (C)	Mounting (G)	Mounting (H)	Industry Standard
SCE-1PBFG	6.63	3.81	3.89	4.88	2.94	IS5
SCE-2PBFG	6.63	3.81	3.89	4.88	2.94	IS5
SCE-3PBFG	8.88	3.81	3.89	7.13	2.94	IS5





Phone (989) 799-6871
Fax (989) 799-4524




FIBERGLASS PUSHBUTTON ENCLOSURES


TECHNICAL DATA

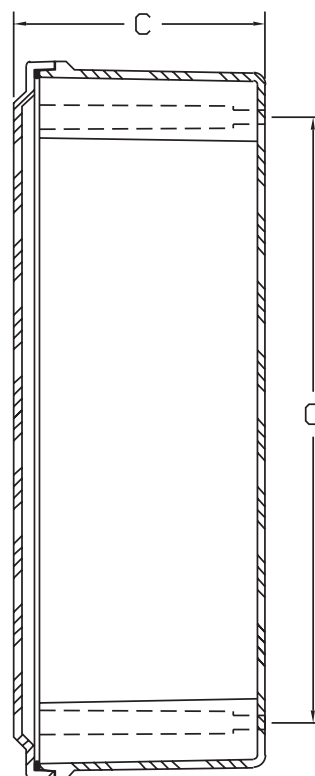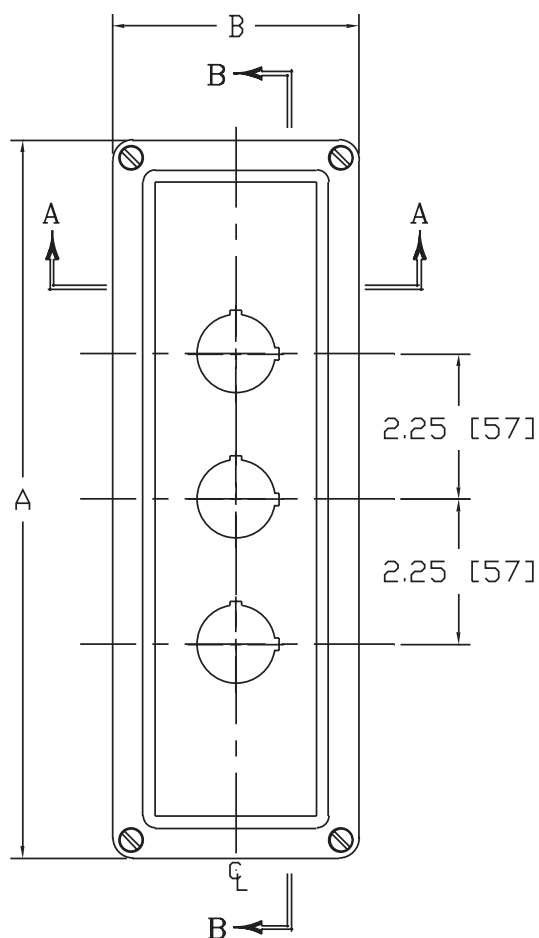

SECTION B-B



SECTION A-A

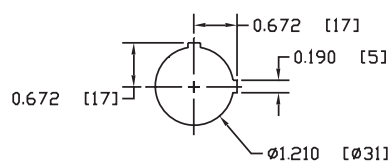

DETAIL A

Fiberglass Screw Cover Junction Enclosures

Application -

Designed for indoor or outdoor use to house electronic controls, instruments and components in areas that may be regularly hosed down, are in very wet conditions, or are exposed to corrosive agents. Provides protection from dust, dirt, oil and water.

Construction -

- Fiberglass reinforced compression molded polyester.
- Continuous memory retaining gasket.
- Mounting strips molded in.
- Captive screw fasteners.
- Integral panel mounting inserts.
- Stainless steel continuous hinge.

Finish -

Light gray fiberglass. Optional sub-panels are marine grade aluminum.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66



FIBERGLASS SCREW COVER JUNCTION ENCLOSURES

ENCLOSURE PRODUCT CODE F1									
Catalog No.	Height (A)	Width (B)	Depth (C)	Mounting (G)	Mounting (H)	Interior (J)	Interior (K)	Interior (L)	Industry Standard
SCE-604FG	7.39	5.43	4.75	6.75	2.00	5.84	3.85	4.00	IS5
SCE-606FG	7.52	7.50	4.75	6.75	4.00	5.72	5.72	4.00	IS5
SCE-806FG	9.50	7.50	4.75	8.88	4.00	7.73	5.74	4.00	IS5
SCE-808FG	9.50	9.41	4.25	8.75	6.00	7.73	7.73	4.06	IS5
SCE-1008FG	11.35	9.41	4.25	10.75	6.00	9.73	7.73	3.50	IS5
SCE-10086FG	11.37	9.37	5.06	10.75	6.00	9.73	7.73	4.37	IS5
SCE-1210FG	13.41	11.43	5.21	12.75	8.00	11.79	9.80	4.50	IS5
SCE-1212FG	13.41	13.50	6.25	12.75	10.00	11.70	11.70	5.53	IS5
SCE-1407FG	15.75	8.75	6.81	15.00	5.00	14.00	7.00	6.12	IS5
SCE-1412FG	15.47	13.50	6.25	14.62	10.00	13.53	11.55	5.37	IS5
SCE-1614FG	17.45	15.46	6.23	16.75	12.00	15.63	13.60	5.36	IS5
SCE-1816FG	19.61	17.61	8.82	18.88	12.00	17.69	15.69	7.99	IS5
SCE-2016FG	21.68	17.68	8.83	21.25	10.00	19.72	15.72	8.00	IS5


SUB-PANELS (F2)		
Catalog No.	Panel Height (D)	Panel Width (E)
SCE-6P4AL	4.88	2.88
SCE-6P6AL	4.88	4.88
SCE-8P6AL	6.88	4.88
SCE-8P8AL	6.75	6.88
SCE-10P8AL	8.88	6.88
SCE-12P10AL	10.88	8.88
SCE-12P12AL	10.88	10.88
SCE-14P8AL	12.88	5.88
SCE-14P12AL	12.88	10.88
SCE-16P14AL	14.88	12.88
SCE-18P16AL	16.88	14.88
SCE-20PJ16AL	18.88	14.88

Phone (989) 799-6871
Fax (989) 799-4524




FIBERGLASS SCREW COVER JUNCTION ENCLOSURES


TECHNICAL DATA

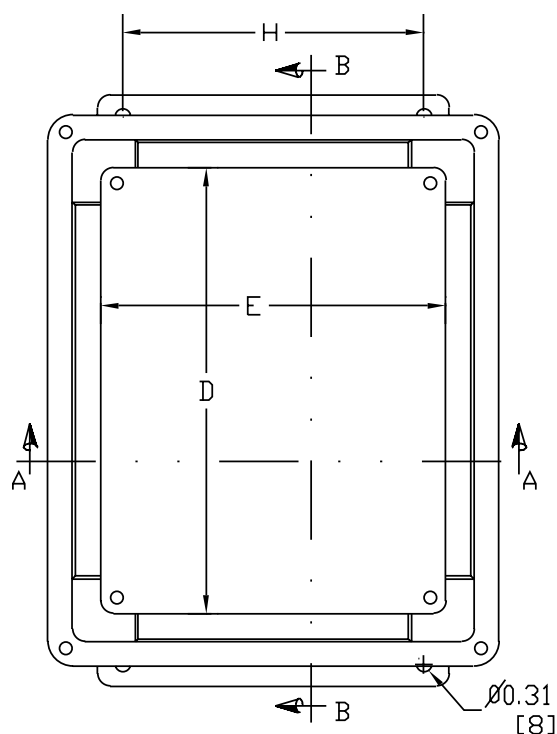

FRONT VIEW WITH
COVER REMOVED

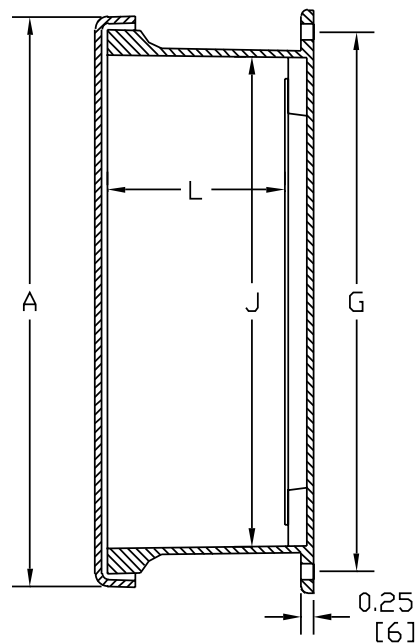

SECTION B-B

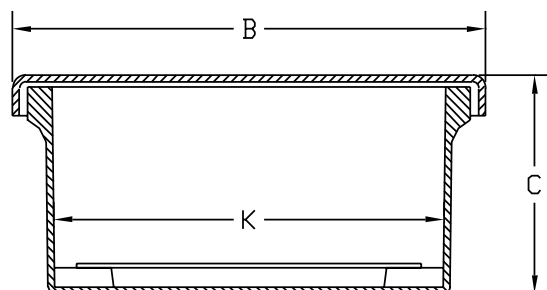

SECTION A-A

Fiberglass Junction Enclosures

Application -

Designed for indoor or outdoor use to house electrical and electronic controls, instruments and components in areas that may be regularly hosed down, are in very wet conditions, or are exposed to corrosive agents. Provides protection from dust, dirt, oil and water. Provides protection from occasional temporary or prolonged submersion.

Construction -

- Fiberglass reinforced compression molded polyester.
- Oil-resistant door gasket.
- Mounting strip molded in.
- Quick release padlock latch.
- Integral panel mounting inserts.
- Stainless steel continuous hinge.

Finish -

Light gray fiberglass. Optional sub-panels are marine grade aluminum.


IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13

UL Listed Type 4, 4X & 12

CSA Type 4, 4X & 12

IEC 60529 IP66

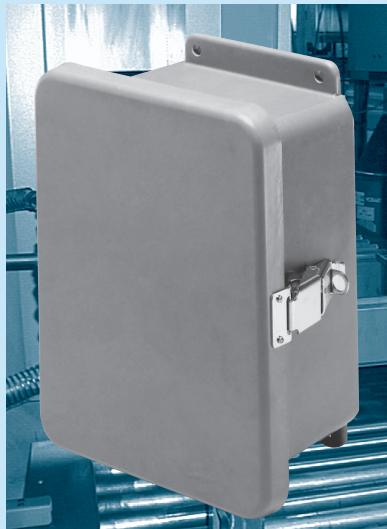

FIBERGLASS JUNCTION ENCLOSURES

ENCLOSURE PRODUCT CODE F1									
Catalog No.	Height (A)	Width (B)	Depth (C)	Mounting (G)	Mounting (H)	Interior (J)	Interior (K)	Interior (L)	Industry Standard
SCE-6045CHQRFG	7.39	5.43	4.75	6.75	2.00	5.84	3.85	4.00	IS5
SCE-6065CHQRFG	7.52	7.50	4.75	6.75	4.00	5.72	5.72	4.00	IS5
SCE-8065CHQRFG	9.50	7.50	4.74	8.88	4.00	7.73	5.74	4.00	IS5
SCE-808CHQRFG	9.50	9.41	4.75	8.75	6.00	7.73	7.73	4.06	IS5
SCE-10085CHQRFG	11.35	9.41	4.25	10.75	6.00	9.73	7.73	3.50	IS5
SCE-12105CHQRFG	13.41	11.43	5.06	12.75	8.00	11.79	9.80	4.50	IS5
SCE-1212CHQRFG	13.41	13.50	6.36	12.75	10.00	11.70	11.70	5.53	IS5
SCE-14087CHQRFG	15.75	8.75	6.81	15.00	5.00	14.00	7.00	6.12	IS5
SCE-14127CHQRFG	15.47	13.50	6.25	14.62	10.00	13.53	11.55	5.37	IS5
SCE-16147CHQRFG	17.45	15.46	6.23	16.75	12.00	15.63	13.60	5.36	IS5
SCE-18169CHQRFG	19.61	17.61	8.82	18.88	12.00	17.69	15.69	7.99	IS5
SCE-2016CHQRFG	21.68	17.68	8.83	21.25	10.00	19.72	15.72	8.00	IS5

SUB-PANELS (F2)		
Catalog No.	Panel Height (D)	Panel Width (E)
SCE-6P4AL	4.88	2.88
SCE-6P6AL	4.88	4.88
SCE-8P6AL	6.88	4.88
SCE-8P8AL	6.75	6.88
SCE-10P8AL	8.88	6.88
SCE-12P10AL	10.88	8.88
SCE-12P12AL	10.88	10.88
SCE-14P8AL	12.88	5.88
SCE-14P12AL	12.88	10.88
SCE-16P14AL	14.88	12.88
SCE-18P16AL	16.88	14.88
SCE-20PJ16AL	18.88	14.88




Phone (989) 799-6871

Fax (989) 799-4524



FIBERGLASS JUNCTION ENCLOSURES

TECHNICAL DATA

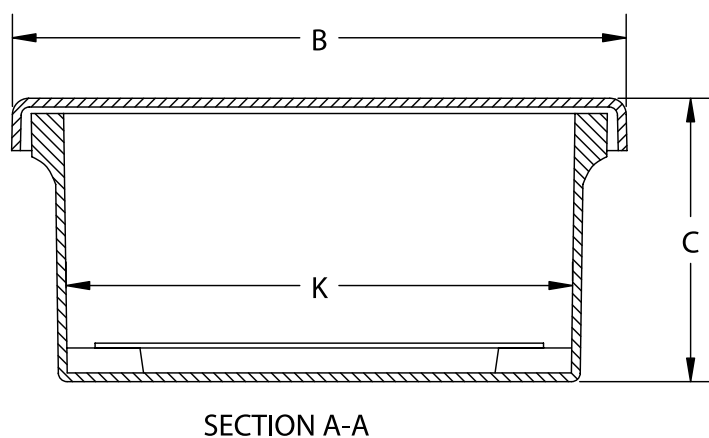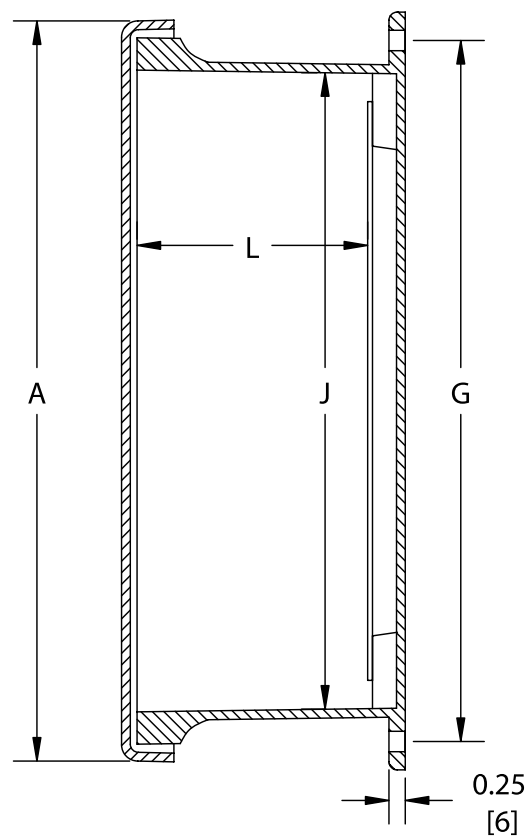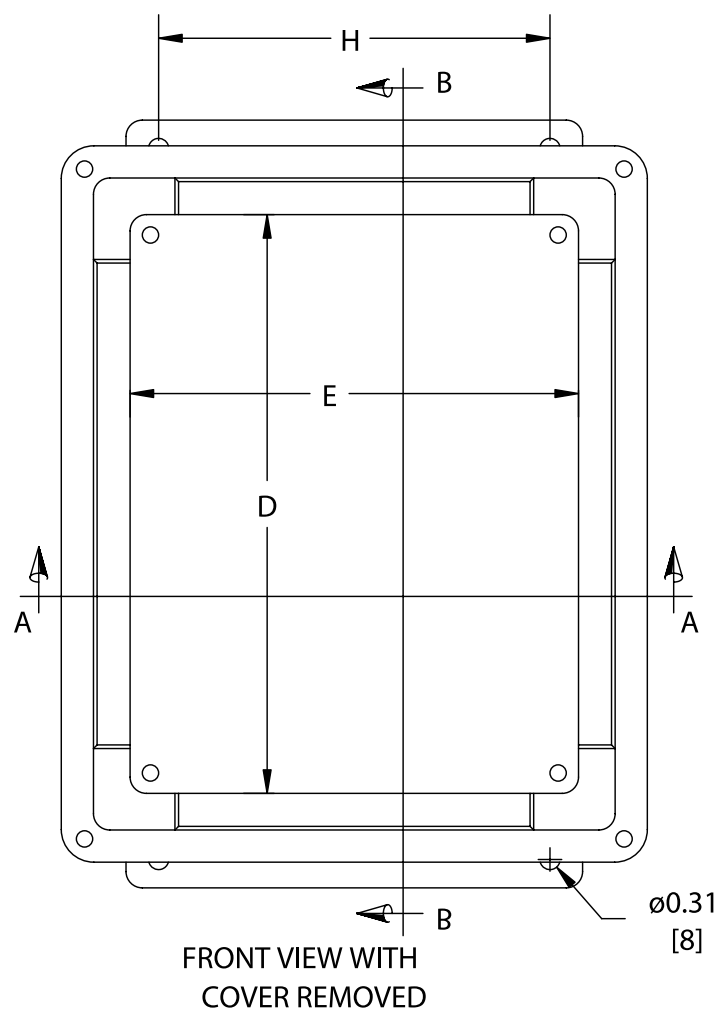

Fiberglass Junction Enclosures With Window

Application -

Designed for indoor or outdoor use to house electronic controls, instruments and components in areas that may be regularly hosed down, are in very wet conditions, or are exposed to corrosive agents and require unrestricted viewing of gauges or controls. Provides protection from dust, dirt, oil and water.

Construction -

- Fiberglass reinforced compression molded polyester.
- Continuous memory retaining gasket.
- Mounting strips molded in.
- Quick release padlock latch.
- Integral panel mounting inserts.
- Stainless steel continuous hinge.
- UVA acrylic bonded window

Finish -

Light gray fiberglass. Optional sub-panels are marine grade aluminum.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66



FIBERGLASS JUNCTION ENCLOSURES WITH WINDOW

ENCLOSURE PRODUCT CODE F1									
Catalog No.	Height (A)	Width (B)	Depth (C)	Mounting (G)	Mounting (H)	Interior (J)	Interior (K)	Interior (L)	Industry Standard
SCE-604FW	7.39	5.43	4.75	6.75	2.00	5.84	3.85	4.00	IS5
SCE-606FW	7.52	7.50	4.75	6.75	4.00	5.72	5.72	4.00	IS5
SCE-808FW	9.50	9.41	4.75	8.88	4.00	7.73	5.74	4.00	IS5
SCE-806FW	9.50	7.50	4.75	8.75	6.00	7.73	7.73	4.06	IS5
SCE-1008FW	11.35	9.41	4.25	10.75	6.00	9.73	7.73	3.50	IS5
SCE-10086FW	11.37	9.37	5.06	10.75	6.00	9.73	7.73	4.37	IS5
SCE-1210FW	13.41	11.43	5.21	12.75	8.00	11.79	9.80	4.50	IS5
SCE-1212FW	13.41	13.50	5.21	12.75	10.00	11.70	11.70	5.53	IS5
SCE-1407FW	15.75	8.75	6.81	15.00	5.00	14.00	7.00	6.12	IS5
SCE-1412FW	15.47	13.50	6.25	14.62	10.00	13.53	11.55	5.37	IS5
SCE-1614FW	17.45	15.46	6.23	16.75	12.00	15.63	13.60	5.36	IS5
SCE-1816FW	19.61	17.61	8.82	18.88	12.00	17.69	15.69	7.99	IS5
SCE-2016FW	21.68	17.68	8.83	21.25	10.00	19.72	15.72	8.00	IS5


SUB-PANELS (F2)		
Catalog No.	Panel Height (D)	Panel Width (E)
SCE-6P4AL	4.88	2.88
SCE-6P6AL	4.88	4.88
SCE-8P6AL	6.88	4.88
SCE-8P8AL	6.75	6.88
SCE-10P8AL	8.88	6.88
SCE-12P10AL	10.88	8.88
SCE-12P12AL	10.88	10.88
SCE-14P8AL	12.88	5.88
SCE-14P12AL	12.88	10.88
SCE-16P14AL	14.88	12.88
SCE-18P16AL	16.88	14.88
SCE-20PJ16AL	18.88	14.88

Phone (989) 799-6871
Fax (989) 799-4524




FIBERGLASS JUNCTION ENCLOSURES WITH WINDOW


TECHNICAL DATA

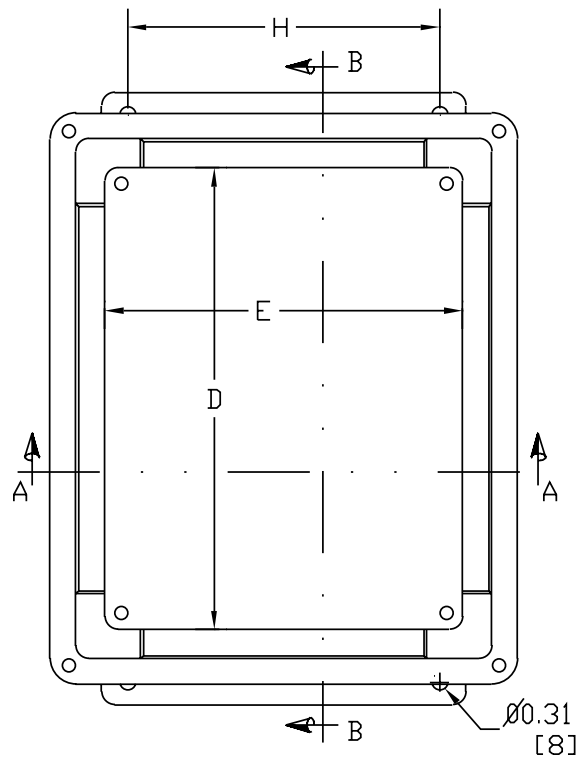

FRONT VIEW WITH
COVER REMOVED

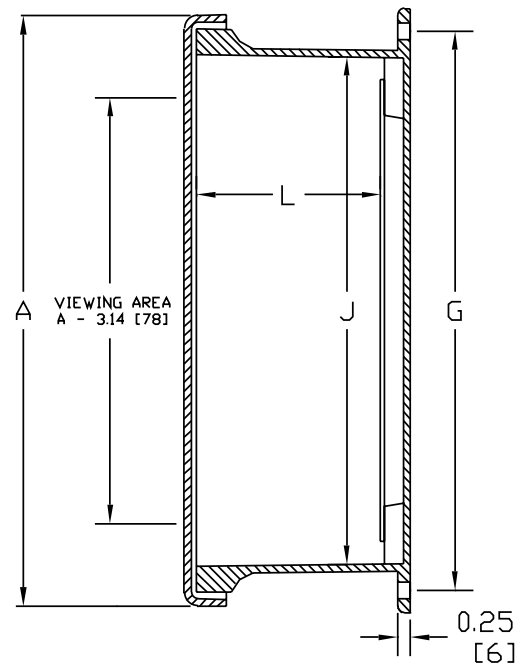

SECTION B-B

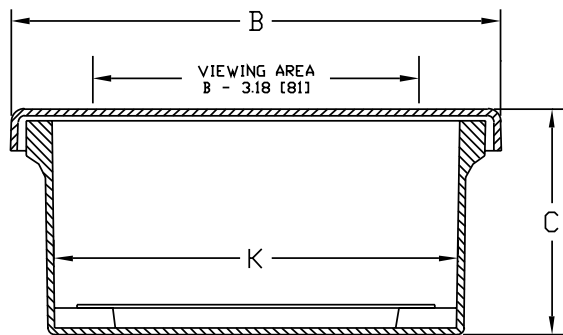

SECTION A-A

Fiberglass Wall-Mount Enclosures

Application -

Designed for indoor or outdoor use to house electrical and electronic controls, instruments and components in areas that may be regularly hosed down, are in very wet conditions, or are exposed to corrosive agents. Provides protection from dust, dirt, oil and water.

Construction -

- Fiberglass reinforced compression molded polyester.
- Oil-resistant door gasket.
- Mounting feet molded in.
- Quick release latches.
- Padlock hasp and staple.
- Integral panel mounting inserts.
- Stainless steel continuous hinge.

Finish -

Light gray fiberglass. Optional sub-panels are marine grade aluminum.

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66



FIBERGLASS WALL-MOUNT ENCLOSURES

ENCLOSURE PRODUCT CODE F1									
Catalog No.	Height (A)	Width (B)	Depth (C)	Mounting (G)	Mounting (H)	Interior (J)	Interior (K)	Interior (L)	Industry Standard
SCE-16H1009QFGLP	18.75	10.96	9.03	17.50	7.00	15.92	10.27	7.80	IS5
SCE-20H1608QFGLP	22.75	16.87	7.77	21.50	10.12	19.70	16.04	6.26	IS5
SCE-20H1610QFGLP	22.75	16.87	9.77	21.50	10.12	19.70	16.04	8.26	IS5
SCE-20H1612QFGLP	22.75	16.87	11.77	21.50	10.12	19.70	16.04	10.26	IS5
SCE-24H2010QFGLP	27.00	21.24	9.90	25.75	14.00	24.05	20.39	8.25	IS5
SCE-30H2010QFGLP	32.86	20.99	9.89	31.75	14.25	29.90	20.14	8.23	IS5
SCE-30H2409QFGLP	33.41	26.32	8.81	32.25	18.50	30.46	25.47	7.12	IS5
SCE-30H2412QFGLP	33.41	26.32	11.95	32.25	18.50	30.46	25.47	10.27	IS5
SCE-30H2414QFGLP	33.41	26.32	13.79	32.25	18.50	30.46	25.47	12.10	IS5
SCE-36H3010QFGLP	39.31	32.50	10.05	38.13	23.88	36.31	31.69	8.36	IS5
SCE-36H3012QFGLP	39.31	32.50	12.05	38.13	23.88	36.31	31.69	10.36	IS5
SCE-36H3014QFGLP	39.31	32.50	14.05	38.13	23.88	36.31	31.69	12.36	IS5



SUB-PANELS (F2)		
Catalog No.	Panel Height (D)	Panel Width (E)
SCE-16P10AL	13.00	8.50
SCE-20P16AL	17.00	13.00
SCE-24P12AL	21.00	9.00
SCE-24P20AL	21.00	17.00
SCE-30P20AL	27.00	17.00
SCE-30P24AL	27.00	21.00
SCE-36P30AL	33.00	27.00

Phone (989) 799-6871
Fax (989) 799-4524




FIBERGLASS WALL-MOUNT ENCLOSURES

TECHNICAL DATA

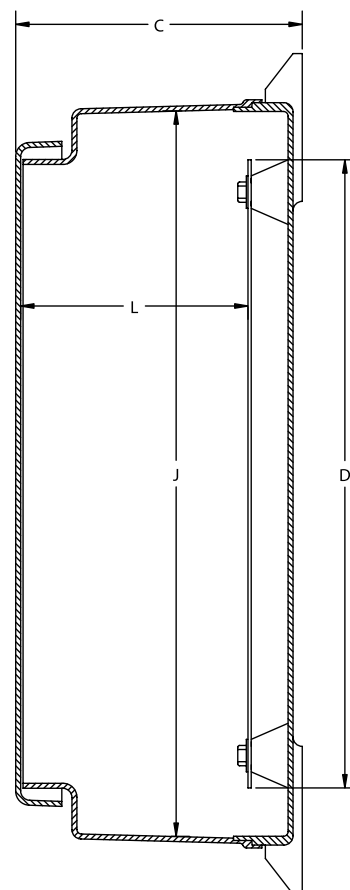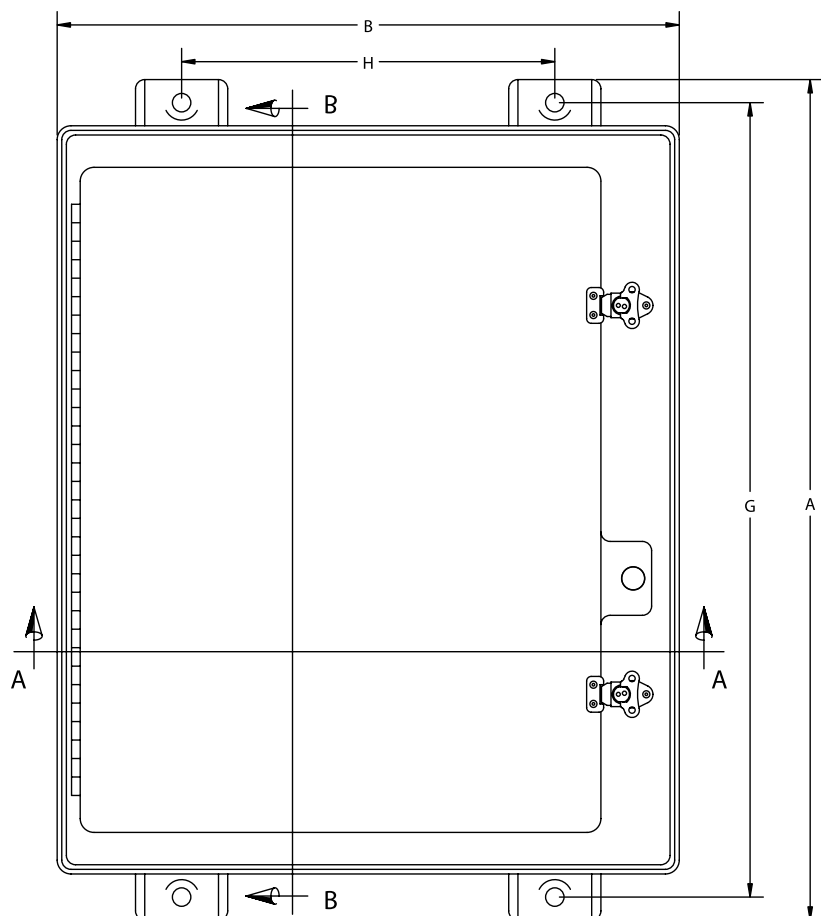

SECTION B-B

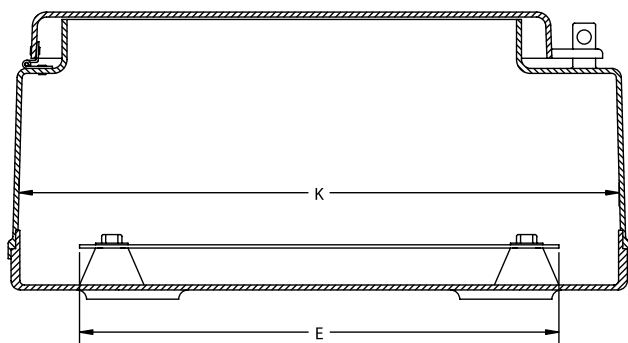

SECTION A-A

Note: SCE-16H1009QFGLP has no padlock feature.

NOTES

NOTES

Accessories

Thermal Management 280 – 288

- Air Conditioners & Heat Exchangers
- Thermostats
- Drain/Vents
- Louver And Filter Kits
- Fan & Grille Kits
- Type 12 Fan / Filter Packages
- Blower Packages
- Rain Hoods
- Cooling Fans
- Anti-Condensation Heaters
- Fan/Heater with Thermostats

Door Hardware 290 – 293

- Quarter Turn Latches
- Pull Handles
- Stainless Steel L-Handle
- Three Point Door Rod Kit
- SCE Door Handles
- Flush Swing Handles
- Clamps

Program Ports 294 – 295

General Accessories 296 – 302

- Grounding Bars and Straps
- Door Stop Kit
- Removable Wire Covers
- Keyboard Kit
- Pull-Out Keyboard Drawers
- Drip Shield Kits
- Folding Shelf
- Column and Bases
- LED Light Fixtures
- Light Switch Mounting Bracket
- Hole Plugs
- Disconnect Adapters
- Mechanical Interlock
- Electrical Interlock
- Electrical Interlock Defeater



Phone (989) 799-6871
Fax (989) 799-4524



Accessories

Mounting Options..... 304 – 307

- Nema 1 Mounting Straps
- Nema 3R Mounting Straps
- Eyebolts
- Lifting Lugs
- Caster Kits
- Leveling Pads
- Angle Iron Mounting Feet
- Nema 3R Mounting Foot Kit
- Mounting Foot Kit for (ELJ) Enviroline®
- Mounting Foot Kit for Enviroline® Enclosures
- Floor Stand Kits
- EL Flush Mount Frames

Mounting Panels..... 308 – 319

- Sub-panels
- Filler Plates
- Individual Panel Supports
- Dead Front Panels
- Swing Panel Assembly for “LP” Enclosures
- Swing Panel Assembly for Enviroline® Enclosures
- XM Barrier Plates

Media Pockets & Windows 320 – 321

- Exterior Print Pockets
- CD and Disk Pockets
- Print Pockets
- NEMA 4 Window Kits

Protective Access Enclosures..... 322 – 324

- Hinged Window Enclosures
- Hinged Access Enclosures
- Internal Disconnect Enclosures
- External Disconnect Enclosure

Service Parts..... 326 – 329

- Door Gasket
- EMI Gasket
- Mechanical Defeater
- Sealing Washers
- Channel Nuts & Clip Nuts
- Touch Up Paint
- Keys
- Hinges

Thermal Management

Side Mount Air Conditioner

SCE can supply cooling components for your electrical enclosure. McLean Midwest Air Conditioner packages include thermostat control and EMI/RFI noise suppressors. For lead times please consult an SCE sales representative.

- Thermostat control and digital display.
- Malfunction pressure switch.
- Door switch input.
- Internal active condensate management plan.
- Motorized impeller air movers.
- Coated condenser coil to resist against airborne contaminants.

Finish -

Powder coated RAL 7035 semi-texture

**Note: Normal discount rates may not apply. Consult your local Distribution Center*

SIDE MOUNT UNITS							
Catalog No.	Height (A)	Width (B)	Depth (C)	Spec. BTU	Spec. Hz	Spec. Volt	Product Code
N17-0116-G010	17.64	12.00	8.40	908/1025	50/60	115	P1
N17-0126-G010	17.64	12.00	8.40	908/1025	50/60	230	P1
N17-0216-G010	17.64	12.00	8.40	1500/1800	50/60	115	P1
N17-0226-G010	17.64	12.00	8.40	1500/1800	50/60	230	P1

**Note: UL listed Type 12.*

N28-0416-G050	28.00	11.50	14.00	3800/4000	50/60	115	P1
N28-0426-G050	28.00	11.50	14.00	4000	60	230	P1
N36-0616-G050	36.00	11.50	14.00	5400/6000	50/60	115	P1
N36-0626-G050	36.00	11.50	14.00	5400/6000	50/60	230	P1
N36-0646-G050	36.00	11.50	14.00	5400/6000	50/60	460	P1
N36-0816-G050	36.00	11.50	14.00	8250/8500	50/60	115	P1
N36-0826-G050	36.00	11.50	14.00	8250/8500	50/60	230	P1
N36-0846-G050	36.00	11.50	14.00	8250/8500	50/60	460	P1
N43-1216-G050	43.00	11.50	14.00	10400/11000	50/60	115	P1
N43-1226-G050	43.00	11.50	14.00	10400/11000	50/60	230	P1
N43-1246-G050	43.00	11.50	14.00	10400/11000	50/60	460	P1


**Note: UL listed Type 3R, 4, & 12.*




N43




N36



N28



N17

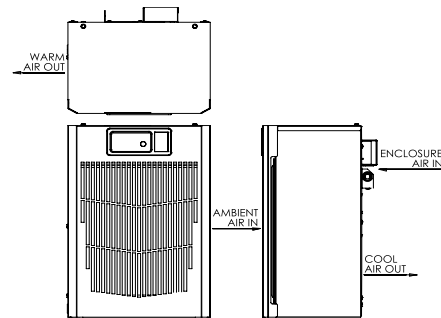

Phone (989) 799-6871
Fax (989) 799-4524



SIDE MOUNT UNITS


Catalog No.	Height (A)	Width (B)	Depth (C)	Spec. BTU	Spec. Hz	Spec. Volt	Product Code
G28-0416-G050	28.55	16.97	10.10	4600/4900	50/60	115	P1
G28-0426-G050	28.55	16.97	10.10	4600/4900	50/60	230	P1
G28-0446-G050	28.55	19.67	10.10	4600/4900	50/60	460	P1
G28-0616-G050	28.55	16.97	10.10	6000/6400	50/60	115	P1
G28-0626-G050	28.55	16.97	10.10	6000/6400	50/60	230	P1
G28-0646-G050	28.55	16.97	10.10	5400/6000	50/60	460	P1
G52-0816-G050	52.69	17.12	11.66	8000	50/60	115	P1
G52-0826-G050	52.69	17.12	11.66	8000	50/60	230	P1
G52-0846-G050	52.69	17.12	11.66	8000	50/60	460	P1
G52-1216-G050	52.69	17.12	11.66	12000	50/60	115	P1
G52-1226-G050	52.69	17.12	11.66	12000	50/60	230	P1
G52-1246-G050	52.69	17.12	11.66	12000	50/60	460	P1



G28




G52

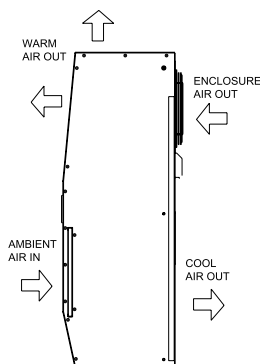

SIDE MOUNT UNITS

Catalog No.	Height (A)	Width (B)	Depth (C)	Spec. BTU	Spec. Hz	Spec. Volt	Product Code
M28-0216-G013	28.50	17.00	11.33	908/1025	50/60	115	P1
M28-0226-G004	28.50	17.00	11.33	908/1025	50/60	230	P1

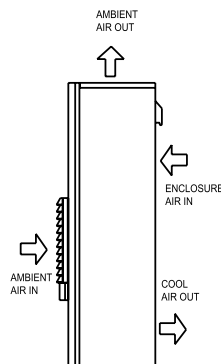

Thermal Management

Side Mount Air Conditioner

SCE can supply cooling components for your electrical enclosure. McLean Midwest Air Conditioner packages include thermostat control and EMI/RFI noise suppressors. For lead times please consult an SCE sales representative. UL listed Type 3R, 4, & 12.

- Thermostat control and digital display.
- Malfunction pressure switch.
- Door switch input.
- Internal active condensate management plan.
- Motorized impeller air movers.
- Coated condenser coil to resist against airborne contaminants.

Finish -

Powder coated RAL 7035 semi-texture

**Note: Normal discount rates may not apply. Consult your local Distribution Center*

Thermal Management

Top Mount Air Conditioner

SCE can supply cooling components for your electrical enclosure. McLean Midwest Air Conditioner packages include thermostat control and EMI/RFI noise suppressors. For lead times please consult an SCE sales representative. UL listed Type 12.

- Thermostat control and digital display.
- Surge suppressor.
- Condensate management plan.

Finish -
Powder coated RAL 7042

**Note: Normal discount rates may not apply. Consult your local Distribution Center*

Heat Exchanger


SCE can supply cooling components for your electrical enclosure. Heat Exchangers packages include thermostat control and EMI/RFI noise suppressors. For lead times please consult an SCE sales representative. UL type 12.

Finish -
Powder coated RAL 7035 semi-texture

**Note: Normal discount rates may not apply. Consult your local Distribution Center*


TOP MOUNT UNITS

Catalog No.	Height (A)	Width (B)	Depth (C)	Spec. BTU	Spec. Hz	Spec. Volt	Product Code
MHB11-0216-G306	10.25	17.00	21.08	2200/2200	50/60	115	P1
MHB11-0226-G306	10.25	17.00	21.08	2200/2200	50/60	230	P1
MHB11-0416-G307	10.25	17.00	21.08	3300/4000	50/60	115	P1
MHB11-0426-G306	10.25	17.00	21.08	3300/4000	50/60	230	P1

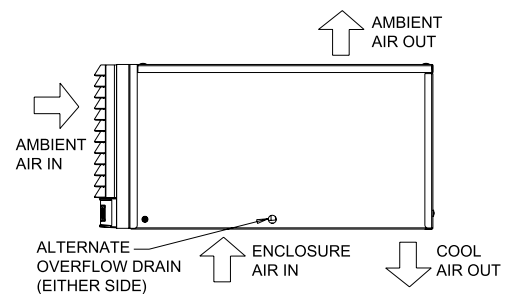

HEAT EXCHANGERS

Catalog No.	Height (A)	Width (B)	Depth (C)	Cooling Performance	Spec. Hz	Spec. Volt	Product Code
XR20-0416-012	20.00	7.50	3.00	4 W/°F (7 W/°C)	50/60	115	P1
XR29-0816-012	29.50	10.00	3.09	8 W/°F (14 W/°C)	50/60	115	P1
XR29-1816-012	29.66	10.24	5.92	18 W/°F (32 W/°C)	50/60	115	P1
XR47-2416-012	47.16	10.24	5.92	24 W/°F (43 W/°C)	50/60	115	P1

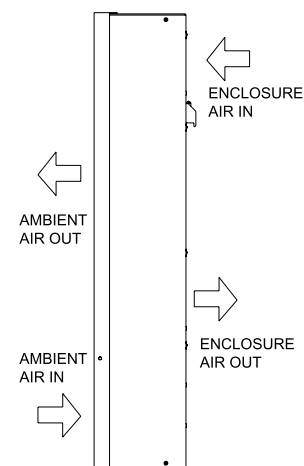

Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Used With	Height (A)	Width (B)	Depth (C)	Contact	Product Code	List Price
SCE-TEMNC	Heater	2.40	1.26	1.42	NC	P2	32.55
SCE-TEMNO	Fan	2.40	1.26	1.42	NO	P2	32.55




Catalog No.	Used With	Height (A)	Width (B)	Depth (C)	Contact	Product Code	List Price
SCE-TEM2	Heater & Fan	2.00	2.00	2.00	NC & NO	P2	82.79




Catalog No.	Used With	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-HYGRO	Heater, Fan, Light	2.60	2.00	1.42	P2	188.42



Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code
SCE-BV4XKIT	2.76	1.97	1.00	F1
SCE-DV4XKIT	2.76	1.97	0.69	F1



Breather Vents



Drain Vents

Thermal Management

Thermostat

Designed to regulate air temperature in enclosures that operate with heaters or fans. This mechanical bi-metallic thermostat has a set point range of 30° to 140°F and is easily installed on 35mm mounting rail. (NC) Contact normally closed, or (NO) Contact normally open, switch capacity 10 amp 120-250 VAC Resistive load and 1 amp 120-250V AC Inductive load, 1.25 amp 24V DC.

Dual Thermostat

Designed to regulate air temperature in enclosures that operate with heaters and fans. This mechanical bi-metallic thermostat has a set point range of 30° to 140°F and is easily installed on 35mm mounting rail. Dual functions as (NC) contact normally closed, or (NO) contact normally open, switch capacity 10 amp 120-250 VAC Resistive load and 1 amp 120-250V AC Inductive load, 1.25 amp 24V DC.

Mechanical Hygrostat

Designed to regulate relative air humidity in enclosures. Mechanical hygrosats can operate with heaters, fans, or warning lights. Adjustable set point range of 30 to 90 humidity, maximum switch capacity 250V AC.

Breather & Drain Vents

Add vents or drain breather and maintain Type 4X seal against dust, dirt, oil and water. Vents and drain breather are made of corrosion and UV resistant fiberglass and supplied with gasket.

UL recognized 3, 4, 4X & 12

Thermal Management


Louver Kit

Designed for ventilation in enclosures where excessive heat or moisture is a problem. Kits may be installed in the field by making a cutout of the proper size. Louver plates are made of heavy gauge steel and powder coated ANSI-61 gray. "SS" parts are made of Type 304 stainless steel with #4 brushed finish.

Catalog No.	Height (A)	Width (B)	Cutout Size (F)	Cutout Size (G)	Product Code	List Price
SCE-AVK23	3.25	3.25	2.00	1.75	P2	16.64
SCE-AVK33	3.88	4.50	2.62	3.00	P2	17.38
SCE-AVK34	4.75	4.50	3.50	3.00	P2	18.38
SCE-AVK43	4.50	5.50	3.25	4.00	P2	18.87
SCE-AVK44	5.63	5.50	4.38	4.00	P2	19.87
SCE-AVK64	5.63	7.50	4.38	6.00	P2	21.85
SCE-AVK66	7.88	7.50	6.62	6.00	P2	22.60
SCE-AVK812	15.31	9.50	14.06	8.00	P2	34.77
SCE-AVK84	5.81	9.50	4.56	8.00	P2	23.34
SCE-AVK86	8.18	9.50	6.94	8.00	P2	26.33
SCE-AVK88	10.56	9.50	9.31	8.00	P2	29.31

Stainless Steel

SCE-AVK23SS	3.25	3.25	2.00	1.75	P2	41.60
SCE-AVK33SS	3.88	4.50	2.62	3.00	P2	43.46
SCE-AVK34SS	4.80	4.50	3.50	3.00	P2	45.94
SCE-AVK43SS	4.50	5.50	3.25	4.00	P2	47.19
SCE-AVK44SS	5.63	5.50	4.38	4.00	P2	49.67
SCE-AVK64SS	5.63	7.50	4.48	6.00	P2	54.63
SCE-AVK66SS	7.88	7.50	6.62	6.00	P2	55.88
SCE-AVK812SS	15.31	9.50	14.06	8.00	P2	86.93
SCE-AVK84SS	5.81	9.50	4.56	8.00	P2	57.13
SCE-AVK86SS	8.19	9.50	6.94	8.00	P2	58.36
SCE-AVK88SS	10.56	9.50	9.31	8.00	P2	65.82

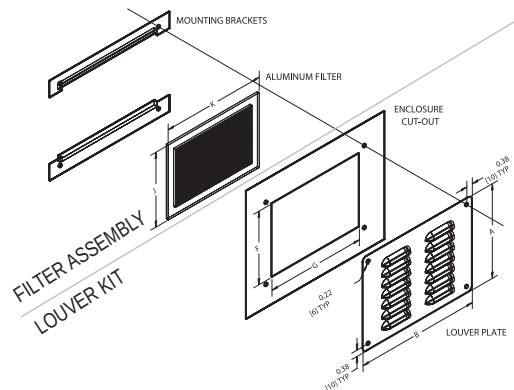

Filter Assembly

Designed for use with louver kit. Consists of aluminum filter brackets with mounting holes to align with louver mounting holes and a washable aluminum air filter to provide good air filtration. For installation information, please consult our Installation Manual at www.saginawcontrol.com.


Catalog No.	Filter Size (J)	Filter Size (K)	Product Code	List Price
SCE-FLT33	3.22	3.25	P2	22.35
SCE-FLT34	4.09	3.25	P2	22.35
SCE-FLT43	3.84	4.25	P2	22.35
SCE-FLT44	4.97	4.25	P2	22.35
SCE-FLT64	4.45	6.25	P2	24.84
SCE-FLT66	6.72	6.25	P2	24.84
SCE-FLT84	4.64	8.25	P2	27.32
SCE-FLT86	7.02	8.25	P2	27.32
SCE-FLT88	9.39	8.25	P2	27.32
SCE-FLT812	14.14	8.25	P2	29.80

Phone (989) 799-6871


Fax (989) 799-4524



Catalog No.	Height (A)	Width (B)	Depth (C)	Cutout Size (F)	Cutout Size (G)	Mounting Dimensions (H)	Mounting Dimensions (T)	Mounting CFM	Mounting Dimensions (W)	Product Code	List Price
SCE-FA44	6.11	7.38	3.28	5.66	5.66	0.77	4.12	115	6.38	P2	146.53
SCE-FA66	7.61	8.88	3.75	7.16	7.16	1.33	4.50	238	7.88	P2	260.78
SCE-FA1010	11.62	12.88	5.25	11.16	11.16	2.14	6.88	665	11.88	P2	347.70
SCE-FA44-230	6.11	7.38	3.28	5.66	5.66	0.77	4.12	115	6.38	P2	161.18
SCE-FA66-230	7.61	8.88	3.75	7.16	7.16	1.33	4.50	238	7.88	P2	286.85
SCE-FA1010-230	11.62	12.88	5.25	11.16	11.16	2.14	6.88	665	11.88	P2	382.46

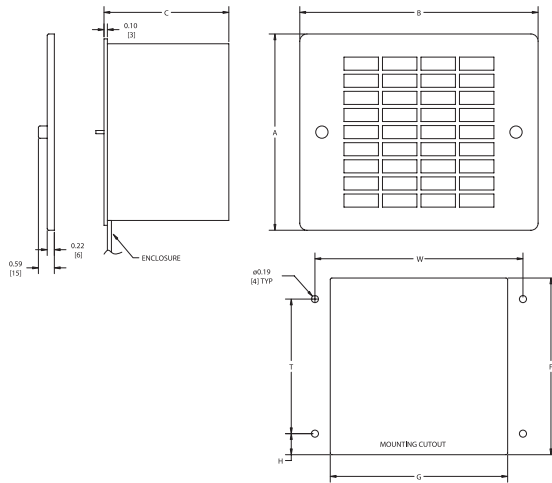

Catalog No.	Height (A)	Width (B)	Cutout Size (F)	Cutout Size (G)	Mounting Dimensions (H)	Mounting Dimensions (T)	Mounting Dimensions (W)	Product Code	List Price
SCE-FGA44	6.11	7.38	5.66	5.66	0.77	4.12	6.38	P2	67.05
SCE-FGA66	7.61	8.88	7.16	7.16	1.33	4.50	7.88	P2	69.54
SCE-FGA1010	11.62	12.88	11.16	11.16	2.14	6.88	11.88	P2	91.89

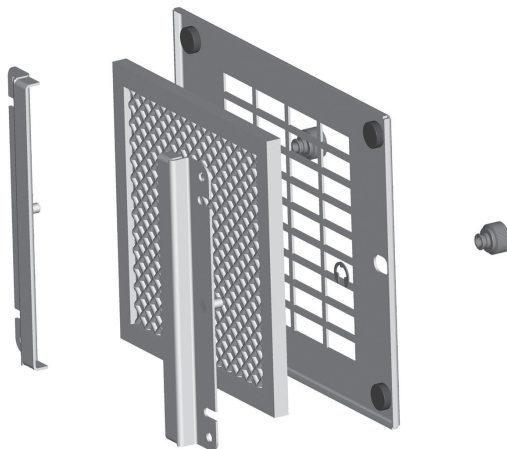

Thermal Management

Fan Package

Designed for use in enclosures that require cooling but have limited space. Consists of a washable aluminum filter, steel air plenum, removable stainless steel grille, and single phase fan. Grille has captivated thumb nuts for easy access to the filter from the outside. Fans are available in 115 or 230 volt AC, 60/50 Hertz (HZ) single phase. Air plenum is ANSI-61 gray powder coated. For installation information, please consult our Installation Manual at www.saginawcontrol.com. UL listed motor.

Filter and Grille Package

Designed for use on air discharge side of cooling fan package. Stainless steel grille with captivated thumb screws. Aluminum mounting brackets and aluminum filter. Mounting hardware is furnished.

Thermal Management

Type 12 Fans & Filters

Easy to install snap fit design for use in enclosures that require cooling but have limited space in Type 1 & 12 applications. Housing and grille are made of black heat resistant (ABS-FR), self-extinguishing material. Includes Type 12 Filter. Fans are available in 115, 230, or 24 volt AC, 60/50 Hertz (HZ) single phase.

UL Recognized Type 12

Type 12 Exhaust Filters

Easy to install snap fit design for use on air discharge side of cooling fan package for Type 1 & 12 applications. Housing and grille are made of black heat resistant (ABS-FR), self-extinguishing material with a Type 12 filter.

UL Recognized Type 12


Blower Package

Designed for use in enclosures that require cooling but have limited space. Consists of a washable aluminum air filter, steel air plenum, removable stainless steel grille. Grille has captivated thumb nuts for easy access to the filter from the outside. Fan is 115 or 230 volt AC 60/50 Hertz (HZ). The 125 degree angled design provides greater air movement within the enclosure. Air plenum is ANSI 61 gray powder coated. UL listed motor.

Blower Package (Filter and Grille)


Designed for use with SCE Fan Packages and Filter and Grille Package. Aluminum washable filters provide good air filtration.

Catalog No.	Height (A)	Width (B)	Depth (C)	CFM 50/60 Hz	Product Code	Cutout Size (F)	List Price
SCE-N12FA44	5.91	5.91	2.17	26/29	P2	5.03 Sq.	152.13
SCE-N12FA66	9.84	9.84	4.76	135/159	P2	8.91 Sq.	215.08
SCE-N12FA1010	12.80	12.80	6.30	306/341	P2	11.57 Sq.	375.08
SCE-N12FA44-230	5.91	5.91	2.17	39/46	P2	5.03 Sq.	191.80
SCE-N12FA66-230	9.84	9.84	4.76	62/70	P2	8.91 Sq.	342.30
SCE-N12FA1010-230	12.80	12.80	6.18	306/341	P2	11.57 Sq.	413.11
SCE-N12FA44-24VDC	5.91	5.91	2.88	27/37	P2	5.03 Sq.	324.59
SCE-N12FA66-24VDC	9.84	9.84	4.39	82/88	P2	8.91 Sq.	401.31

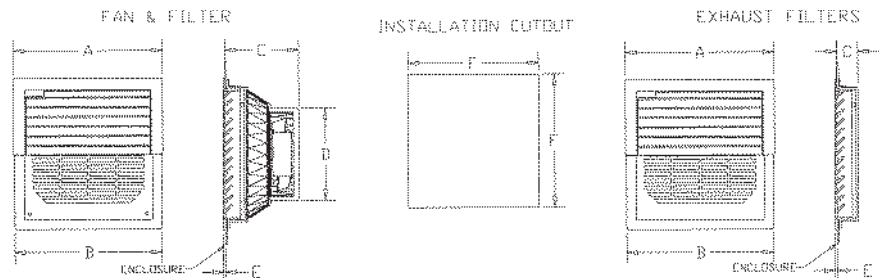

Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	Cutout Size (F)	List Price
SCE-N12FGA44	5.91	5.91	1.22	P2	5.03 Sq.	41.31
SCE-N12FGA66	9.84	9.84	1.42	P2	8.91 Sq.	55.08
SCE-N12FGA1010	12.80	12.80	1.42	P2	11.57 Sq.	68.85

Catalog No.	Height (A)	Width (B)	Depth (C)	CFM	Product Code	List Price
SCE-BP115	5.75	18.88	6.95	324	P2	484.30
SCE-BP230	5.75	18.88	6.95	324	P2	484.30

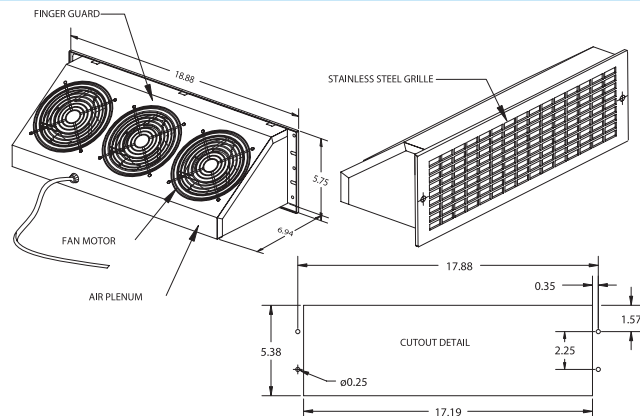


Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-FGABP	5.75	18.88	0.22	P2	101.89


Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-RH44	8.09	7.62	4.50	P2	39.94
SCE-RH66	8.46	9.24	4.56	P2	42.60
SCE-RH1010	12.34	13.12	4.50	P2	47.93
Stainless Steel					
SCE-RH44SS	8.09	7.62	4.50	P2	55.91
SCE-RH66SS	8.46	9.24	4.56	P2	59.64
SCE-RH1010SS	12.34	13.12	4.50	P2	67.10

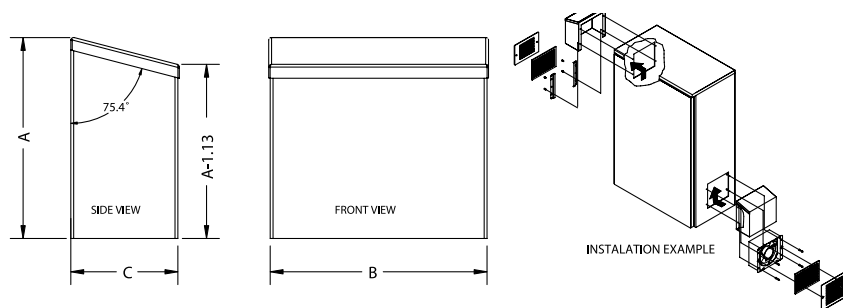

Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-RH4N12	9.44	8.25	4.50	P2	49.93
SCE-RH6N12	13.44	12.25	4.50	P2	53.25
SCE-RH10N12	16.44	15.25	4.50	P2	59.92
Stainless Steel					
SCE-RH4N12SS	9.44	8.25	4.50	P2	69.89
SCE-RH6N12SS	13.44	12.25	4.50	P2	74.55
SCE-RH10N12SS	16.44	15.25	4.50	P2	83.87

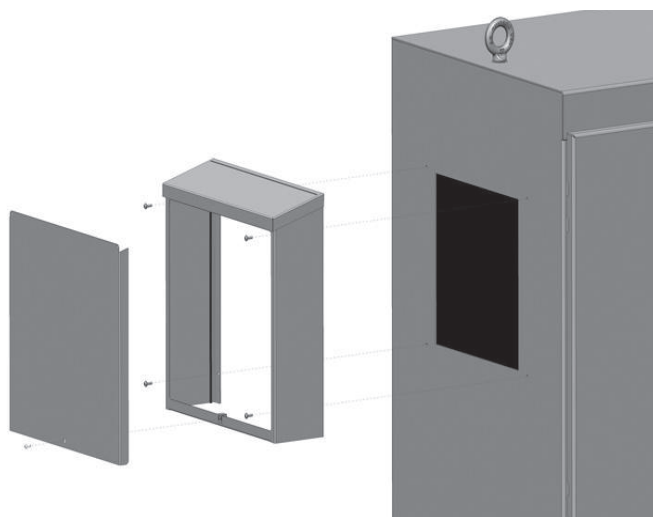

Thermal Management

Rain Hood

Designed for use with standard fan and filter kits to prevent rain, sleet, snow, dropping water or fluids from being drawn into the enclosure. Made of heavy gauge galvanized steel and powder coated ANSI-61 gray. "SS" kits are made of Type 304 stainless steel with #4 brushed finish. UL Recognized. For installation information, please consult our Installation Manual at www.saginawcontrol.com.

Note: Fan and Filter Kit are sold separately.

UL Recognized Type 3R

Rain Hood with Access Cover

Designed for use with Type 12 fan and filter kits to prevent rain, sleet, snow, dropping water or fluids from being drawn into the enclosure. Removable cover for easy access to fan and filter kits. Made of heavy gauge galvanized steel and powder coated ANSI-61 gray. "SS" kits are made of Type 304 stainless steel with #4 brushed finish. UL Recognized. For installation information, please consult our Installation Manual at www.saginawcontrol.com.

Note: Fan and Filter Kit are sold separately.

UL Recognized Type 3R

Thermal Management

Cooling Fans

Designed for use in enclosures where space is limited and reliable cooling is required. 115 or 230 volt AC 60/50hz. Single phase motor. A finger guard is included. UL listed motor.

Finger Guards

A finger guard is included with each cooling fan. An additional finger guard can be mounted on either of the fans for maximum safety. Chrome plated.



Cooling Fan Bracket

Cooling fan brackets are designed for general circulation or to direct air in a problem area. Brackets are made of heavy gauge steel and powder coated white. Fans and finger guards are ordered separately.


Catalog No.	Air Flow CU Feet Per Min.	Diameter	Fan Dim. Square	Depth	Product Code	List Price
SCE-CF4	108		4.69	1.52	P2	60.84
SCE-CF6	235	6.72		2.00	P2	153.98
SCE-CF10	550	10.00		3.50	P2	161.43
SCE-CF4-230	108		4.69	1.52	P2	66.95
SCE-CF6-230	235	6.72		2.00	P2	170.55
SCE-CF10-230	550	10.00		3.50	P2	177.58



Catalog No.	Use on Cooling Fan Cat. No.	Product Code	List Price
SCE-GARD4	SCE-CF4	P2	17.38
SCE-GARD6	SCE-CF6	P2	21.11
SCE-GARD10	SCE-CF10	P2	26.08



Catalog No.	Description	Height (A)	Width (B)	Depth (C)	(E)	(F)	(J)	Product Code	List Price
SCE-112399	4" Fan Bracket	6.00	5.00	1.50	-	3.00	0.62	P2	20.52
SCE-111252	6" Fan Bracket	10.00	6.88	2.00	-	5.00	1.00	P2	24.31
SCE-110551	10" Fan Bracket	13.50	10.12	3.50	4.00	4.00	2.00	P2	44.52

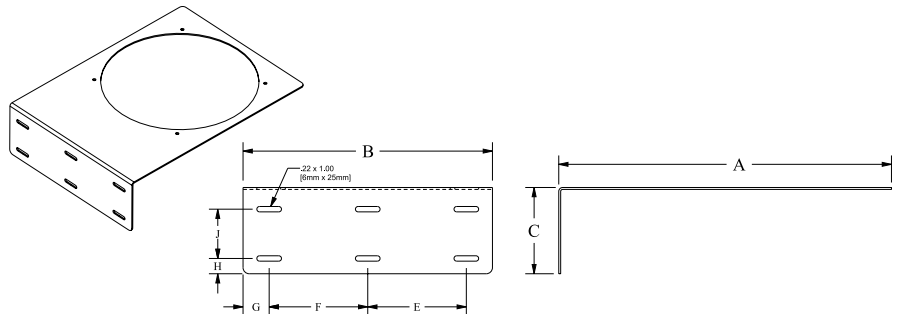

Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Description	AMP	WATTS	Product Code	List Price
SCE-AHC15	Heater	.125 MA	15	P2	108.03
SCE-AHC30	Heater	.250 MA	30	P2	108.03
SCE-AHC50	Heater	.416 MA	50	P2	108.03



Catalog No.	Watt @ 60 Hz	Volt	Height	Width	Depth	Product Code	List Price
SCE-HF1251A	125	115	5.50	4.00	4.50	P1	167.86
SCE-HF1252A	125	230	5.50	4.00	4.50	P1	180.53
SCE-HF2001A	200	115	5.50	4.00	4.50	P1	186.86
SCE-HF2002A	200	230	5.50	4.00	4.50	P1	193.20
SCE-HF4001B	400	115	7.50	4.00	4.50	P1	218.54
SCE-HF4002B	400	230	7.50	4.00	4.50	P1	231.20
SCE-HF8001B	800	115	7.50	4.00	4.50	P1	281.88
SCE-HF8002B	800	230	7.50	4.00	4.50	P1	294.55



- Brushed Aluminum Housing
- Thermostat Range 0° to 100°F (-18° to 38°C)
- Heat discharge at the top of the heater
- Panel mount
- Air volume of 16 CFM on 125 & 200 Watt heaters, 26 CFM on 400 & 800 Watt heaters
- Heat indicator light
- Switch for Auto or Fan
- UL Recognized
- CSA Approved
- CE

Thermal Management

Anti-Condensation Heater

Helps prevent condensation thus preventing corrosion and keeping electrical equipment on line. "AHC" Touch Safe Series Anti-Condensation Space heater is designed to keep the temperature inside of an enclosure several degrees above the external ambient temperature and above the dew point. There are no moving parts, no thermostat to set or malfunction, and no adjustments are needed for ambient temperature changes. Easy to install, with two wires to connect and two mounting screws. Made of extruded black anodized aluminum. Operating temperatures -30°C to 60°C, 120VAC. When possible, two smaller units are more efficient than one larger unit. For technical information consult our Installation Manual at www.saginawcontrol.com.

Fan Heater with Thermostat

Designed to protect electrical controls, instruments and sensitive components from low temperatures and the effects of condensation and corrosion by maintaining a stable temperature within the electrical enclosure. These heaters are not intended for use in hazardous, wet, dusty or dirty locations. For installation information, consult our Installation Manual at www.saginawcontrol.com.

DOOR HARDWARE

1/4 Turn Door Latch Inserts

Designed to replace black quarter turn latches when additional security is required.

Slotted 2 x 4 Door Latch

(28mm cam included)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DLSB	1	Chrome	P2	17.38
SCE-DLSBB	1	Black	P2	17.38
SCE-DLSSB	1	Stainless	P2	42.22



Wing Knob Door Latch

(28mm cam included)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DLWKC	1	Chrome	P2	17.38
SCE-DLWKF	1	Black	P2	17.38
SCE-DLWKF-25	25	Black	V1	284.83



Padlocking Wing Knob Latch

(28mm cam included)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-PLWKB	1	Black	P2	19.87
SCE-PLWKB-50	50	Black	V1	651.65



7mm Triangular Latch with Key

(28mm cam included)

(Key: SCE-107930)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DL7TE	1	Chrome	P2	17.38



Coinproof Door Latch

(28mm cam included)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DLCA	1	Chrome	P2	14.90



5mm Double Bit Door Latch with Key

(28mm cam included)

(Key: SCE-110047)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DL5MDB	1	Chrome	P2	12.91
SCE-DL5MDBB	1	Black	P2	12.91



6 mm External Stop Cam, Plated Steel for use with Quarter Turn Latch.

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-100814	10	P2	24.00



Padlocking Housing Latch

(28mm cam included)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-PLHG	1	Black	P2	17.38



Keylocking Wing Knob Latch

(28mm cam included)

(Key: SCE-K333)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-KLWN	1	Chrome	P2	34.77
SCE-KLWNB	1	Black	P2	34.77



Keylocking Door Latch

(28mm cam included)

(Key: SCE-K333)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DLKLD	1	Chrome	P2	27.32
SCE-DLKLDB	1	Black	P2	27.99
SCE-DLKLDB-25	25	Black	V1	543.12



7mm Square Door Latch with Key

(28mm cam included)

(Key: SCE-101695)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DL7SC	1	Chrome	P2	17.38



8mm Square Door Latch with Key

(28mm cam included)

(Key: SCE-101697)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-DL8SB	1	Black	P2	12.91
SCE-DL8SC	1	Chrome	P2	12.91



Non-Locking "T" Handle

(28mm cam included)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-NLTH	1	Chrome	P2	24.84



Keylocking "T" Handle

(28mm cam included)

(Key: SCE-K333)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-ELKLT	1	Chrome	P2	39.19



28 mm External Stop Cam, Plated Steel for use with Quarter Turn Latch.

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-102804	10	P2	24.00

DOOR HARDWARE

Mini Quarter Turn Latches

Designed for use on ELJ enclosures and window kits.

(35° cam included)

Catalog No.	Qty. Per Kit	Finish	Product Code	List Price
SCE-MINQ	1	Chrome	P2	9.94
SCE-MINQB	1	Black	P2	9.94



"SCE" Handle

Designed for use on custom and stock SCE enclosures. Can be used as replacements for installed SCE hardware when a different locking mechanism is desired. 7" and 5" lengths for different size enclosures. Black zinc die cast. For 2 or 3-point latch, use SCE-ARK Door Rod Kit.

Catalog No.	Description	Length	Qty. Per Kit	Product Code	List Price
SCE-PCH5	Coinproof/Padlocking	5 in.	1	P2	86.93
SCE-PH5	Padlocking	5 in.	1	P2	86.93
SCE-PKH5	Keylocking/Padlocking	5 in.	1	P2	86.93
SCE-PCH5-7SC	7 mm Square Insert	5 in.	1	P2	86.93
SCE-PCH7	Coinproof/Padlocking	7 in.	1	P2	99.34
SCE-PH7	Padlocking	7 in.	1	P2	99.34
SCE-PKH7	Keylocking/Padlocking	7 in.	1	P2	99.34
SCE-PCH7-7SC	7 mm Square Insert	7 in.	1	P2	99.34



SCE-PCH5
SCE-PCH7



SCE-PKH5
SCE-PKH7
Key: SCE-KC101



SCE-PH5
SCE-PH7



SCE-PCH5-7SC
SCE-PCH7-7SC
Key: SCE-101695

Mini Quarter Turn Latch Options

304 Stainless Steel Padlock Bracket for Miniature Quarter Turn. (ELJ & HWK)

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-MINQPL	1	P2	8.52



Black Keylocking Lever Knob for Miniature Quarter Turn.

(ELJ & HWK)

(No cam included)

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-MINQKLB	1	P2	49.52



Key: SCE-2233X

Black Non-Locking Lever Knob for Miniature Quarter Turn.

(ELJ & HWK)

(No cam included)

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-MINQLB	1	P2	28.56



Black 6 mm Square Miniature Quarter Turn with Key.

(ELJ & HWK)

(No cam included)

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-MINQ6MS	1	P2	34.19



28 mm Cam, Plated Steel for use with Miniature Quarter

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-105419	1	P2	2.04



35° Cam, Plated Steel for use with Miniature Quarter Turns on ELJ Enclosures. (ELJ, HWK & HA)

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-112984	1	P2	1.73



DOOR HARDWARE

Enviroline® Series Handles

Designed for use in the Enviroline® Series enclosures, for a quick and easy conversion from the standard quarter turn latch with no added holes or cutouts necessary for installation. (Key: SCE-K333)

Catalog No.	Description	Qty. Per Kit	Product Code	List Price
SCE-ELKL	Keylocking Handle	1	P2	62.09
SCE-ELPL	Padlocking Handle	1	P2	62.09

**Flush Swing Handles**

Designed for use on custom and stock SCE enclosures. Can be used as replacements on SCE work stations when a different locking mechanism is required. Zinc die cast metal powder coated black.

Catalog No.	Description	Qty. Per Kit	Product Code	List Price
SCE-FSH2	Keylocking	1	P2	63.34
SCE-FSH4	8mm Square Lock	1	P2	63.34
SCE-FSH6	Keylocking/Padlocking	1	P2	81.96
SCE-FSH8	Padlocking	1	P2	72.03



SCE-FSH2
Key: SCE-K333



SCE-FSH4
Key: SCE-101697



SCE-FSH6
Key: SCE-K333




SCE-FSH8

Enviroline® Three-Point Latch Kit


Designed for use with all Enviroline® Series enclosures. This latch kit will add a two or three point latching system to the enclosures with easy to cut and install rod guides and 5/16 inch round rods with rollers for a strong easy functioning latching system. No added holes or cutouts in enclosure necessary for installation.

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-3PTL	1	P2	62.09


**Stainless Steel Handle**

(KEY: SCE-KC101)

Catalog No.	Description	Qty. Per Kit	Product Code	List Price
SCE-SSPCH5	Coinproof/Padlocking	1	P2	173.86
SCE-SSPH5	Padlocking	1	P2	173.86
SCE-SSPKH5	Keylocking	1	P2	191.88

**Aluminum Rod Kit With Ramp Shoes**

Catalog No.	Rod Size	Qty. Per Kit	Product Code	List Price
SCE-ARK36	0.375 x 0.625	1	P2	115.23
SCE-103370	0.25 x 0.50	1	P2	57.80

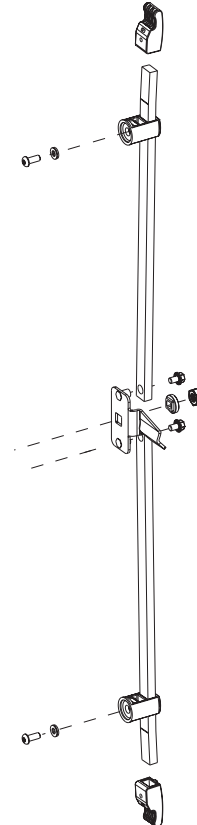

Phone (989) 799-6871
Fax (989) 799-4524

SCE SAGINAW
CONTROL &
ENGINEERING
Your Enclosure Source®

DOOR HARDWARE

Quick Release Clamp Assembly

Designed for quick access to an enclosure with standard screw clamps. Clamps can be used on Type 4, 4X, and 12 enclosures.

Catalog No.	Enclosure Type	Finish	Qty. Per Kit	Product Code	List Price
SCE-QR1	"CHNF"	Chrome	1	P2	9.94
SCE-QR1SS	"CHNF"	Stainless	1	P2	19.87
SCE-QR2	"LP"	Stainless	2	P2	22.97
SCE-QRLP	"LP"	Stainless	2	P2	12.87



SCE-QR1



SCE-QR2



SCE-QRLP

Replacement Clamps

Designed as replacement clamps for SCE enclosures.


Catalog No.	Enclosure Type	Finish	Qty. Per Kit	Product Code	List Price
SCE-DRL-6	"CHNF"	Chrome	1	P2	7.46
SCE-DRL-4K	"LP"	Stainless	2	P2	12.42
SCE-LPCLAMP	"LP"	Chrome	1	P2	17.38
SCE-LPCLAMPSS	"LP"	Stainless	1	P2	21.87



SCE-DRL-6



SCE-DRL-4K



SCE-LPCLAMP/SS

Pull Handle


Designed for use as a handle on enclosures. Handle is a steel tube plastic coated black with black molded polyamide plastic end stays.

Catalog No.	Qty. Per Kit	Size	Product Code	List Price
SCE-UHK13	1	3.15 x 13.00	P2	39.74

**Finger Pull**

Designed for use as pull latch for the removable wireway.

Catalog No.	Description	Qty. Per Kit	Product Code	List Price
SCE-ELFP	Aluminum	1	P2	9.94

**Padlock Kit For Junction Boxes**

Designed for "CHNF" enclosures. Maintains water-tight and dust-tight seal. Made of plated steel.

Catalog No.	Qty. Per Kit	Product Code	List Price
SCE-PLKJIC	1	P2	9.94

**Pull Handles - 4"**

Designed for use on keyboard drawers, swing out panels, etc. Mounting hardware is included.

Catalog No.	Finish	Hole Center	Qty. Per Kit	Product Code	List Price
SCE-APH	Aluminum	4.00	1	P2	7.46



SCE-APH

PROGRAM PORTS

Application -

This product line is designed to help increase your compliance with NFPA 70E and reduce the risk of personal exposure of arc flash by reducing the need to access the enclosure, by bringing GFCI utility outlets and data interface ports outside the enclosures.

Construction -

- Transparent sealed cover.
- Quick release padlocking latch.
- 120 VAC Simplex Outside.
- Available with Ethernet, Control Net, Serial or Device Net data interface ports

Options -

- Contact the factory for availability of any other data interface ports or type 4X designs.

Finish -

Powder coated light gray.

Industry Standards -

- UL Recognized Type 1, 12 or 4
- CSA Approved Type 1, 12 or 4
- CE & NFPA 70E Compliant

Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-R2-F3R3-U450	1	(Ethernet)	4	P4

RJ-45 CAT5 F/F connector with 120 VAC Simplex outlet & 3 Amp circuit breaker



Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-B15-F3R3-U450	1	(Control Net)	4	P4

RJ-45 CAT5 F/F connector with 120 VAC Simplex outlet & 3 Amp circuit breaker



Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-Q7-F3R3-U450	1	(Serial)	4	P4

DB9 F/M connector with 120 VAC Simplex outlet & 3 Amp circuit breaker



Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-Q9-F3R3-U450	1	(Serial)	4	P4

DB9 M/F connector with 120 VAC Simplex outlet & 3 Amp circuit breaker



Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-D4-H3R3-U450	1	(Device Net)	4	P4

Network Tap PC Board with 120 VAC Simplex outlet & 3 Amp circuit breaker



Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-B15-K3RF3-U450	1	(Control Net)	4	P4
P-B15-K4RF3-U450	1	(Control Net)	12	P4



RJ-45 CAT5 F/F connector with 120 VAC
Duplex GFCI with internal Simplex GFCI & 3 Amp circuit breaker

Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-Q7-K3RF3-U450	1	(Serial)	4	P4
P-Q7-K4RF3-U450	1	(Serial)	12	P4



DB9 F/M connector with 120 VAC
Duplex GFCI with internal Simplex GFCI & 3 Amp circuit breaker

Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-Q9-K3RF3-U450	1	(Serial)	4	P4
P-Q9-K4RF3-U450	1	(Serial)	12	P4



DB9 M/F connector with 120 VAC
Duplex GFCI with internal Simplex GFCI & 3 Amp circuit breaker

Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-R2-K3RF3-U450	1	(Ethernet)	4	P4
P-R2-K4RF3-U450	1	(Ethernet)	12	P4



RJ-45 CAT5 F/F connector with 120 VAC
Duplex GFCI with internal Simplex GFCI & 3 Amp circuit breaker

Catalog No.	Qty. Per Kit	Interface	Type	Product Code
P-D4-M3RF3-U450	1	(Device Net)	4	P4
P-D4-M4RF3-U450	1	(Device Net)	12	P4



Network Tap PC Board with 120 VAC
Duplex GFCI with internal Simplex GFCI & 3 Amp circuit breaker

PROGRAM PORTS

Application -

This product line is designed to help increase your compliance with NFPA 70E and reduce the risk of personal exposure of arc flash by reducing the need to access the enclosure, by bringing GFCI utility outlets and data interface ports outside the enclosures.

Construction -

- Transparent sealed cover.
- Quick release padlocking latch.
- GFCI Ground fault circuit interrupters with exclusive three outlet design, GFCI Duplex outside the enclosure with GFCI Simplex inside.
- Available with Ethernet, Control Net, Serial or Device Net data interface ports

Options -

- Contact the factory for availability of any other data interface ports or type 4X designs.

Finish -

Powder coated light gray.


Industry Standards -

- UL Recognized Type 1, 12 or 4
- CSA Approved Type 1, 12 or 4
- CE & NFPA 70E Compliant

GENERAL ACCESSORIES

Grounding Straps


Grounding straps can be used to provide electrical continuity between metal parts which must be electrically connected. Consists of braided copper with a ring terminal at both ends. Braid is insulated with green and yellow striped plastic.



Catalog No.	Approx. Wire Size (AWG)	Length Between Ring Terminals (CTOC)	Ring Terminal Hole Size	Product Code	List Price
SCE-GS808	#8	8.00	0.330	P2	33.92

Grounding Bars

Designed to provide a grounding area for controls and equipment. Has ten 10-32 tapped conductor holes and two mounting holes. Made of copper.



Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-GB10	1.00	4.00	0.25	P2	86.93

Door Stop Kit

For use on most SCE Type 4, 4X and 12 enclosures to lock door in the open position. Door opening must be at least 12 inches and must open horizontally. Designed to be installed at the bottom of the door opening. For installation information, consult our Installation Manual at www.saginawcontrol.com.


Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.



Catalog No.	Finish	Product Code	List Price
SCE-DSTOPK	Zinc Plated	P2	67.05

Removable Wire Cover

Designed to provide a "false" bottom in an enclosure with a bottom flange larger than 7 inches. Cover is bolted to a frame made of heavy gauge steel. Opens with a finger pull latch. A plate is provided to connect wire covers for a continuous bottom. Made of steel and powder coated white. For installation information, consult our Installation Manual at www.saginawcontrol.com.



Catalog No.	Length (A)	Width (B)	Depth (C)	Enclosure Depth	Product Code	List Price
SCE-14RMW	6.00	35.00	14.00	18.00	P2	198.69
SCE-20RMW	6.00	35.00	20.00	24.00	P2	223.52


Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-24KB	12.25	24.00	5.62	P2	447.04



Catalog No.	Height (A)	Width (B)	Depth (C)	Enclosure Depth	Product Code	List Price
SCE-KBS	3.00	20.00	14.00	24.25	P2	372.54
SCE-KBS32	3.00	20.00	14.00	32.25	P2	372.54

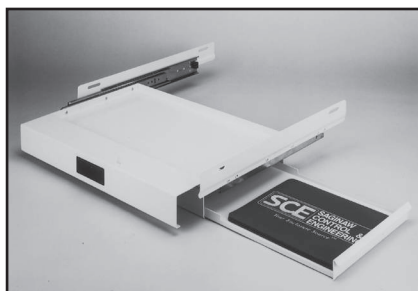

GENERAL ACCESSORIES

Keyboard Kit

Designed to house a keyboard input. Mounted on the outside of an enclosure. Enviroline® type construction with concealed hinge and quarter turn latches. Mouse drawer. Made of heavy gauge steel and powder coated ANSI-61 gray. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Pull-Out Keyboard Drawer

Designed to hold a keyboard and mouse on a separate pull-out shelf. Mounts between mounting channels. Made of heavy gauge steel with a white powder coat finish. A mouse pad is included.

GENERAL ACCESSORIES

Drip Shield Kit For Type 12 & 4 Enclosures

Protects door against dripping water and settling dust. Stainless steel screws and sealing washers are supplied with each kit. Made of steel and powder coated ANSI-61 gray.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.


Stainless Steel Drip Shield Kit For Type 4X Enclosures

Protects door against dripping water and settling dust. Furnished with stainless steel screws and sealing washers. Kit made of stainless steel Type 304.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Catalog No.	Fits Enclosure Width (B)	Product Code	List Price
SCE-DS12N4	12.00	P2	35.83
SCE-DS16N4	16.00	P2	40.80
SCE-DS20N4	20.00	P2	43.28
SCE-DS24N4	24.00	P2	50.74
SCE-DS30N4	30.00	P2	53.22
SCE-DS36N4	36.00	P2	56.40
SCE-DS42N4	42.00	P2	60.31
SCE-DS48N4	48.00	P2	68.82
SCE-DS60N4	60.00	P2	80.17
SCE-DS72N4	72.00	P2	90.43

Catalog No.	Fits Enclosure Width (B)	Product Code	List Price
SCE-DS12SS	12.00	P2	81.96
SCE-DS16SS	16.00	P2	89.41
SCE-DS20SS	20.00	P2	96.86
SCE-DS24SS	24.00	P2	104.31
SCE-DS30SS	30.00	P2	116.72
SCE-DS36SS	36.00	P2	129.14
SCE-DS42SS	42.00	P2	141.56
SCE-DS48SS	48.00	P2	158.95
SCE-DS60SS	60.00	P2	181.31
SCE-DS72SS	72.00	P2	216.07

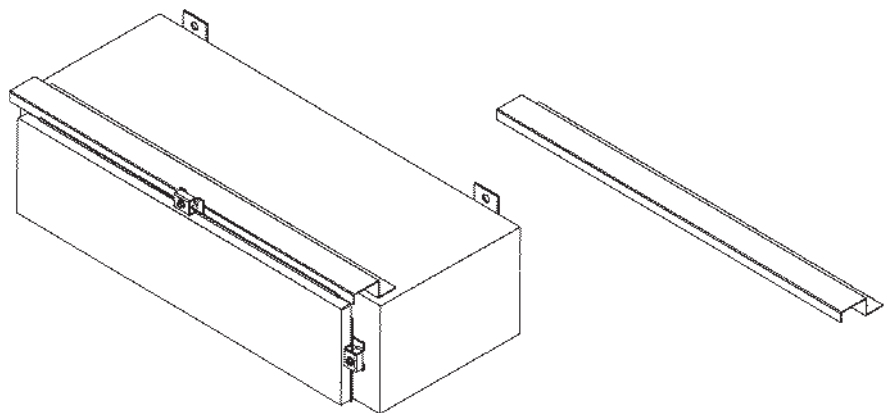


Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Height	Width	Product Code	List Price
SCE-FS1212	12.00	12.00	P2	146.53
SCE-FS1818	18.00	18.00	P2	183.79
SCE-FS2424	24.00	24.00	P2	221.04
Stainless Steel				
SCE-FS1212SS	12.00	12.00	P2	418.00
SCE-FS1818SS	18.00	18.00	P2	476.22
SCE-FS2424SS	24.00	24.00	P2	496.72



Catalog No.	Description	Depth	Width	Product Code	List Price
SCE-18SBASE	Pedestal Base	18.00	18.00	P2	111.76
SCE-24SBASE	Pedestal Base	24.00	24.00	P2	253.32
SCE-44CCOL	Straight Column	4.00	4.00	P2	183.79
SCE-44PBCOL	Angled Column	4.00	4.00	P2	218.56
SCE-66CCOL	Straight Column	6.00	6.00	P2	275.68
SCE-66PBCOL	Angled Column	6.00	6.00	P2	327.83
Stainless Steel					
SCE-18SBASESS	Pedestal Base, Stainless Steel	18.00	1.00	P2	424.63
SCE-24SBASESS	Pedestal Base, Stainless Steel	24.00	1.00	P2	451.45
SCE-44CCOLSS	Straight Column, Stainless Steel	4.00	4.00	P2	524.13
SCE-66CCOLSS	Straight Column, Stainless Steel	6.00	6.00	P2	554.52

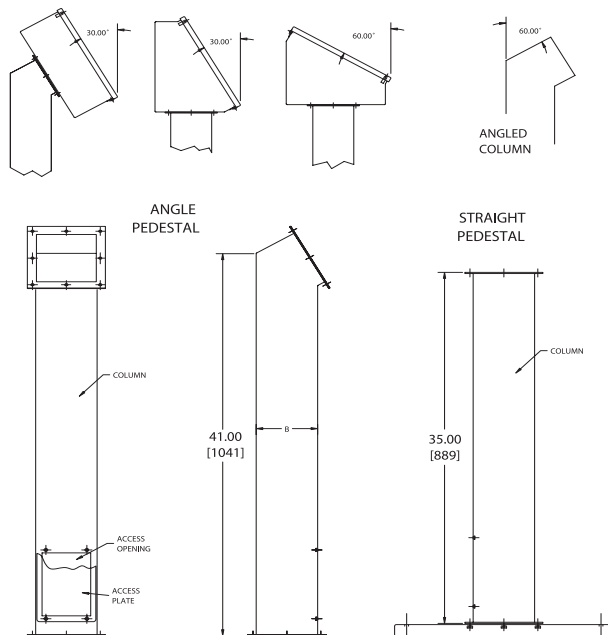

GENERAL ACCESSORIES

Folding Shelf

Folding shelves can be installed on the inside or outside of large enclosures. They are designed to support test equipment and programmers. Locks in the horizontal position. When not in use, shelf can be folded down. Made of heavy gauge steel and powder coated white. "SS" parts are stainless steel Type 304 with #4 brush finish. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Accessory Columns and Bases

Designed to allow enclosures to be floor mounted. Columns can be mounted to either size base. Columns have flanges at each end and a gasketed access plate. Bases are to be bolted to the floor. Gasket and mounting hardware included. For technical information, consult the Installation Manual at www.saginawcontrol.com. Pedestals and bases are ANSI-61 gray powder coated. "SS" parts are stainless steel Type 304 with #4 brush finish.

GENERAL ACCESSORIES

LED Light Fixture

Application -

LED light fixture is designed to provide interior lighting for an enclosure. Can be mounted to light channels in the top of an enclosure or on the front flange of most enclosures. Door activated adjustable switch, switch can be removed and relocated. Terminal block on each end of fixture, making it easy to wire and daisy chain multiple lights continuously. LED bulb with PVC frosted white protective light diffuser included. Housing made from steel and powder coated white epoxy polyester. Units with convenience receptacle outlet are 120 VAC with ground 50/60 HZ. Without convenience receptacle outlet 100 to 277 VAC 50/60 HZ.

Construction -

- 4000K Frosted White
- 18 inch 850 Lumens
- 24 inch 900 Lumens

IS10 - Industry Standards -

UL Component Recognized


Light Switch Mounting Bracket

Designed to remote mount the door activated light switch when space is limited. Light Switch Mounting Bracket may be used with SCE-LF18, SCE-LF18NO, SCE-LF24 & SCE-LF24NO. For installation information, consult our Installation Manual at www.saginawcontrol.com.


Full Light Switch Assembly

Designed to remote mount the light switch when space is limited.

Catalog No.	Height (A)	Width (B)	Depth (C)	AMP	VAC	Hz	Product Code	List Price
SCE-LF18	2.75	18.18	4.00	0.53	100-125	50/60	P2	206.55
SCE-LF24	2.75	24.18	4.00	0.53	100-125	50/60	P2	218.03
SCE-LF18NO	(No Outlet) 2.75	18.18	4.00	0.53	100-240	50/60	P2	185.90
SCE-LF24NO	(No Outlet) 2.75	24.18	4.00	0.53	100-240	50/60	P2	196.72

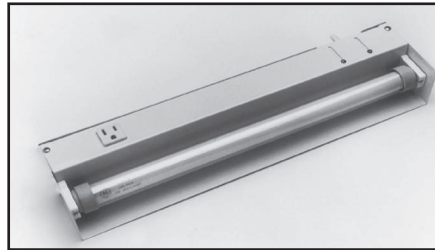

Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-LSMB	2.00	2.68	1.00	P2	25.56

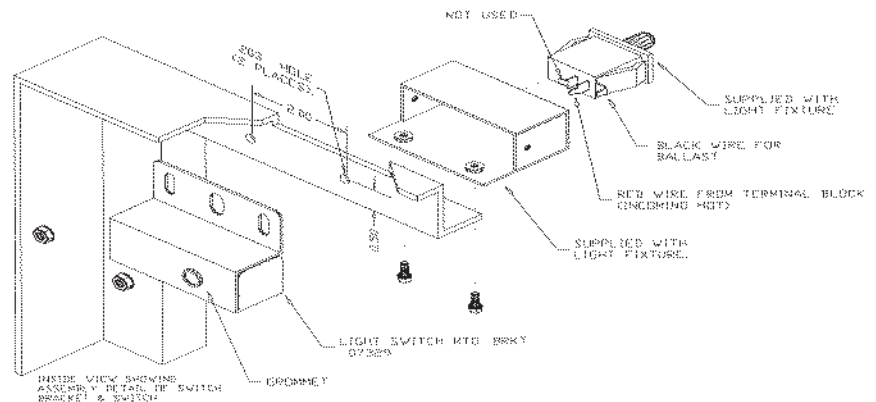


Catalog No.	Product Code	List Price
SCE-LSA	P2	38.34



Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Description	Diameter Inches	Diameter MM	Max. Hole Diameter Inches	Max. Hole Diameter MM	Quantity Per Kit	Product Code	List Price
SCE-ASPB-09	Steel	1.75	44	1.25	30	1	P2	5.13
SCE-ASPBG-09	Steel	1.22	31	.875	22	1	P2	3.63
SCE-ASPB-SS	Stainless Steel	1.75	44	1.25	30	1	P2	19.13
SCE-ASPBG-SS	Stainless Steel	1.22	31	.875	22	1	P2	17.88

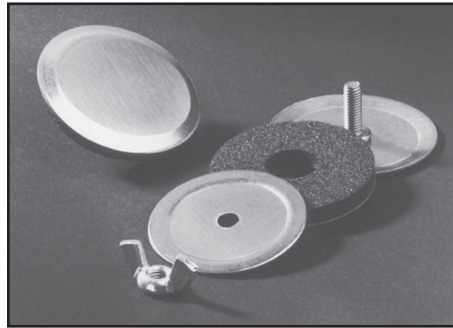

Catalog No.	Outside Diameter	Min. Hole Size	Max. Hole Size	Product Code
SCE-HPSERIES1	1.00	0.50	0.81	F1
SCE-HPSERIES15	1.20	0.88	0.88	F1
SCE-HPSERIES2	1.50	1.00	1.28	F1
SCE-HPSERIES3	2.00	1.38	1.75	F1
SCE-HPSERIES4	2.75	2.00	2.56	F1



GENERAL ACCESSORIES

Oil Tight Hole Seals

Extra push button holes can be sealed against dust, dirt, oil, and water with a SCE hole seal. Seals will cover most pushbutton hole sizes. Hole seals come with oil-resistant gasket, #10-32 x 3/8" stud, zinc plated wing nut and plated steel back plate. Available in stainless steel or ANSI-61 gray powder coated finish.

Hole Seals

Extra pushbutton holes can be sealed against dust, dirt, oil and water. Hole seals are made of corrosion and UV resistant fiberglass, and supplied with gasket and backing nut.

UL recognized 3, 4, 4X, 12, 6P
IEC tested to IP66 and IP68

GENERAL ACCESSORIES

Disconnect Adapter Kit

Designed to convert a SCE - (U) style enclosure to a (V) style. Will accept the following: Allen-Bradley 1494V; Culter-Hammer C361/C371; General Electric Type TDA; ITE Max-Flex FHOH; Square D Class 9422. For Installation information consult our Installation Manual at www.saginawcontrol.com. Made of heavy gauge steel and powder coated ANSI-61 gray.

Blank Disconnect Cover Plate

Designed to cover disconnect cutouts in the flange of the enclosure and has an oil-resistant gasket to seal against oil, dust, dirt, and water. Made of heavy gauge steel and powder coated ANSI-61 gray. Stainless plate is made of Type 304 stainless with #4 brushed finish.

Mechanical Interlock

Designed for use with Enviroline® two-door enclosures to interlock the master door to the slave door.


Electrical Interlock

Designed to provide a safety lockout on an enclosure when the circuits are energized. UL recognized. Works with SCE hardware. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Electrical Interlock Defeater



Designed to provide a key operated momentary contact switch with the contacts normally closed. Turning the key disengages the circuit to the electrical interlock, allowing access to the enclosure. May be used with SCE-E1151 Electrical Interlock. 4 amp, 125 vac.

Catalog No.	Description	Product Code	List Price
SCE-UA400V	"U" Style to 400 Amp Style	P2	47.19
SCE-UAV	"U" Style to V Style	P2	47.19




Catalog No.	Description	Product Code	List Price
SCE-ABDCP	Carbon Steel for Allen-Bradley F/D Cutout	P2	42.22
SCE-DCP	Carbon Steel for Standard SCE Cutout	P2	42.22
SCE-DCPSS	Stainless Steel for Standard SCE Cutout	P2	53.40

Catalog No.	Description	Quantity Per Kit	Product Code	List Price
SCE-104941	Interlock for Left Door as Main	1	P2	143.31
SCE-105604	Interlock for Right Door as Main	1	P2	143.31




Catalog No.	AMPS	Hz	Volt	Product Code	List Price
SCE-E1151	.100 / .63	50/60	115	P2	144.68




Catalog No.	AMPS	Hz	Volt	Product Code	List Price
SCE-EKDF	10	60	120	P2	36.21



Catalog No.	For Use With	Product Code	List Price
SCE-NMST6	6 Inch Wide NEMA 1 Enclosure	P2	15.98
SCE-NMST8	8 Inch Wide NEMA 1 Enclosure	P2	17.04
SCE-NMST10	10 Inch Wide NEMA 1 Enclosure	P2	18.10
SCE-NMST12	12 Inch Wide NEMA 1 Enclosure	P2	19.17
SCE-NMST16	16 Inch Wide NEMA 1 Enclosure	P2	21.30
SCE-NMST20	20 Inch Wide NEMA 1 Enclosure	P2	23.42
SCE-NMST24	24 Inch Wide NEMA 1 Enclosure	P2	25.56

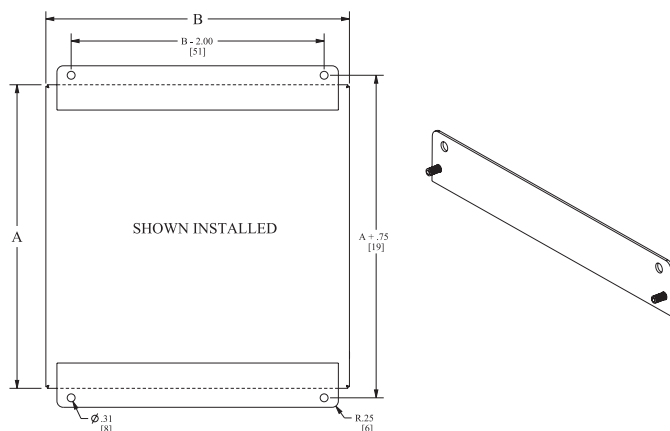

Catalog No.	For Use With	Product Code	List Price
SCE-MST4	4 Inch Wide 3R Enclosure	P2	17.04
SCE-MST6	6 Inch Wide 3R Enclosure	P2	18.10
SCE-MST8	8 Inch Wide 3R Enclosure	P2	19.17
SCE-MST10	10 Inch Wide 3R Enclosure	P2	20.24
SCE-MST12	12 Inch Wide 3R Enclosure	P2	21.30
SCE-MST16	16 Inch Wide 3R Enclosure	P2	23.42
SCE-MST20	20 Inch Wide 3R Enclosure	P2	25.56
SCE-MST24	24 Inch Wide 3R Enclosure	P2	27.69

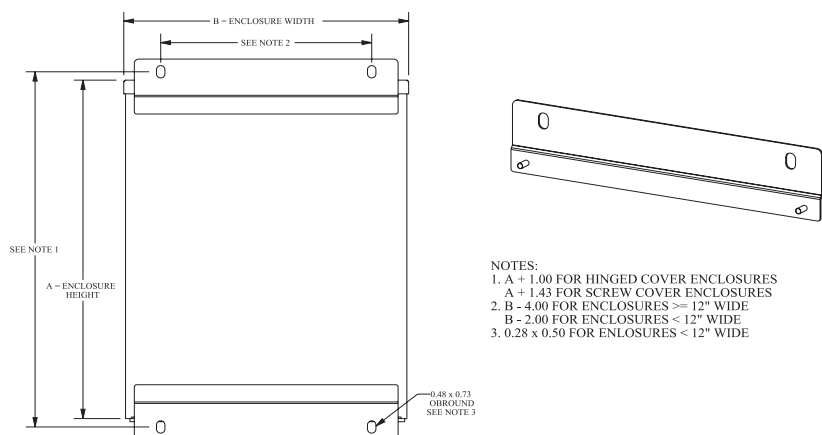

Catalog No.	For Use With	Product Code	List Price
SCE-VRMS24	24 Inch Wide Vented 3R Enclosure	P2	42.67
SCE-VRMS36	36 Inch Wide Vented 3R Enclosure	P2	53.21

MOUNTING OPTIONS

Type 1 Mounting Straps

Designed to install on wall-mount Type 1 enclosures. Two mounting straps per kit. Made of heavy gauge carbon steel, powder coated ANSI-61 gray. Hardware is included to fasten mounting strap kit to the enclosure. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Type 3R Mounting Straps

Designed to install on wall-mount Type 3R enclosures. Two mounting straps per kit. Made of heavy gauge carbon steel, powder coated ANSI-61 gray. Hardware is included to fasten mounting strap kit to the enclosure. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Mounting Straps For Vented 3R Enclosures

Designed to install on wall-mount Vented 3R enclosures. Two mounting straps per kit. Made of heavy gauge carbon steel, powder coated white. Hardware is included to fasten mounting strap kit to the enclosure.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

MOUNTING OPTIONS

Eyebolts

Set of two eyebolts to use for lifting an enclosure. Includes sealing washers and flange nuts. Carbon steel plated zinc clear. For technical information, consult our Installation Manual at www.saginawcontrol.com.

Lifting Lugs

Lifting lugs are designed to be mounted to the left and right side of a standard wall-mount type enclosure for easy handling of fully wired enclosures. Mounting hardware is included. For installation information, consult our Installation Manual at www.saginawcontrol.com. UL Recognized sealing washers supplied to maintain UL ratings of Type 3R, 4, 4X and 12.

Casters

Set of 4 casters. Swivel casters have ball bearing pivots and brakes. Load rating 250 lbs for each caster. For technical information, consult our Installation Manual at www.saginawcontrol.com.

Leveling Pads

Designed to attach to the bottom of the enclosure to allow for adjustments for uneven floors. Pads are zinc plated with a plastic base.

Angle Iron Mounting Feet


Designed for use with free-standing type enclosures when the enclosure must be secured to a concrete floor or base. Two angle iron-mounting feet per kit. Made of heavy gauge carbon steel powder coated ANSI-61 gray. Hardware is included to fasten mounting foot kit to the enclosure.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.


Catalog No.	Description	Quantity Per Kit	Product Code	List Price
SCE-EYE50	1/2"	2	P2	24.84
SCE-EYE63	5/8"	2	P2	28.56
SCE-EYE75	3/4"	2	P2	32.29



Catalog No.	Description	Quantity Per Kit	Product Code	List Price
SCE-LLB5	Steel, Zinc Plated	2	P2	26.55
SCE-LLB5SS	316 Stainless Steel, #4 Brush Finish	2	P2	39.86
SCE-LLB7	For use with Vented 3R Enclosures Steel, Powder Coated White	2	P2	30.32




Catalog No.	Description	Size of Wheel	Product Code	List Price
SCE-CAKR	Set of 4 - 2 Rigid, 2 Swivel	3"	P2	109.28
SCE-CAKS	Set of 4 Swivel Casters	3"	P2	136.60
SCE-CAKR4	Set of 4 - 2 Rigid, 2 Swivel	4"	P2	163.91
SCE-CAKS4	Set of 4 Swivel Casters	4"	P2	191.23



Catalog No.	Quantity Per Kit	Thread Size	Height	Product Code	List Price
SCE-LPD2	4	3/8 - 16	2.00	P2	37.25



Catalog No.	Used on Enclosure Depth	Product Code	List Price
SCE-XMAIMF18	18"	P2	38.34
SCE-XMAIMF20	20"	P2	42.60
SCE-XMAIMF24	24"	P2	51.12




Phone (989) 799-6871
Fax (989) 799-4524




Catalog No.	Fasteners	Quantity Per Kit	NEMA Rating	Product Code	List Price
SCE-ELMFK4	Zinc Plated	4	4 & 12	P2	17.69
SCE-ELMFK4SS	Stainless Steel	4	4, 4X & 12	P2	26.05
SCE-ELMFK6	Zinc Plated	6	4 & 12	P2	23.86
SCE-ELMFK6SS	Stainless Steel	6	4, 4X & 12	P2	31.02

Bulk Parts - 25 Kits per Package




SCE-ELMFK4-25	Zinc Plated	25	4 & 12	V1	307.85
SCE-ELMFK4SS-25	Stainless Steel	25	4, 4X & 12	V1	448.36



Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-N3RMFK4	3.25	2.00	0.51	P2	26.00




Catalog No.	Height (A)	Width (B)	Product Code	List Price
SCE-ELJMFK	2.13	1.25	P2	23.43
SCE-ELJMFKSS	2.13	1.25	P2	46.86




Catalog No.	Description	Quantity Per Kit	NEMA Rating	Product Code	List Price
SCE-ELMFK4SS6-OS	Stainless Steel Type 316	4	4, 4X & 12	P2	53.50



Catalog No.	Description	Quantity Per Kit	Product Code	List Price
SCE-HDWMK	Mounting Kit for use with Multi-Door Free-Standing / Wall-Mount Enclosures	4	P2	78.54



Top Bracket



Bottom Bracket

MOUNTING OPTIONS

Mounting Foot Kit

Made for use with all SCE Enviroline® Series enclosures and two-door wall-mount enclosures. Chemical and Corrosion resistant Polyamide material rated for type 3, 3R, 4, 4X and 12. Available in kits of four or six, with plated steel fasteners or stainless steel fasteners. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Type 3R Mounting Foot Kit

Designed for use on large wall-mount type 3R enclosures. Four mounting feet per kit, made of heavy gauge carbon steel and powder coated ANSI-61 gray. Hardware is included to fasten mounting foot kit to the enclosure.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Enviroline® Junction Enclosure (ELJ) Mounting Foot Kit

Made for use with all SCE Enviroline® Series junction enclosures. Four mounting feet per kit, made of steel and zinc plated. "SS" kit made of type 304 stainless steel. Hardware is included to fasten mounting foot kit to the enclosure.

S.S. Mounting Foot Kit

Made for use with all SCE Enviroline® Series enclosures and two-door wall-mount enclosures. Made of heavy gauge stainless steel type 316/316L with stainless steel stud. Available in kits of four. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Heavy Duty Mounting Kit for Free-Standing / Wall-Mount Enclosures

Designed for use on SCE Multi-Door Free-Standing / Wall-Mount enclosures. Four mounting feet per kit, made of heavy gauge carbon steel with a black textured finish. Hardware is included to fasten mounting foot kit to the enclosure.

MOUNTING OPTIONS

Floor Stand Kit


Can be installed on most wall-mounted enclosures with a width of 20 inches or more. Can also be installed on SCE free-standing enclosures. Kits include two stands. This configuration can be ordered in special sizes. Consult a factory representative for price and delivery. For specifications, consult our Installation Manual at www.saginawcontrol.com. Made of carbon steel and finished with ANSI-61 recoatable gray finish. "SS" parts are made of stainless steel Type 304 with #4 brushed finish. "SS6" parts are made of stainless steel Type 316/316L with #4 brushed finish.

Catalog No.	Height (A)	Width (B)	Product Code	List Price
SCE-FK0608	6.00	8.00	P2	111.76
SCE-FK0610	6.00	10.00	P2	116.72
SCE-FK0612	6.00	12.00	P2	131.63
SCE-FK0618	6.00	18.00	P2	153.98
SCE-FK0624	6.00	24.00	P2	178.81
SCE-FK1208	12.00	8.00	P2	139.08
SCE-FK1210	12.00	10.00	P2	146.53
SCE-FK1212	12.00	12.00	P2	153.98
SCE-FK1216	12.00	16.00	P2	178.81
SCE-FK1218	12.00	18.00	P2	186.27
SCE-FK1220	12.00	20.00	P2	196.20
SCE-FK1224	12.00	24.00	P2	201.17
SCE-FK1512	15.00	12.00	P2	178.81
SCE-FK1516	15.00	16.00	P2	186.27
SCE-FK1518	15.00	18.00	P2	202.77
SCE-FK1524	15.00	24.00	P2	221.04
SCE-FK1808	18.00	8.00	P2	168.89
SCE-FK1810	18.00	10.00	P2	178.81
SCE-FK1812	18.00	12.00	P2	186.27
SCE-FK1816	18.00	16.00	P2	206.14
SCE-FK1824	18.00	24.00	P2	260.78
SCE-FK2412	24.00	12.00	P2	196.93

Stainless Steel

SCE-FK1208SS	12.00	8.00	P2	379.99
SCE-FK1210SS	12.00	10.00	P2	409.79
SCE-FK1212SS	12.00	12.00	P2	437.11
SCE-FK1216SS	12.00	16.00	P2	496.72
SCE-FK1218SS	12.00	18.00	P2	524.03
SCE-FK1224SS	12.00	24.00	P2	552.60
SCE-FK1512SS	15.00	12.00	P2	536.45
SCE-FK1518SS	15.00	18.00	P2	584.89
SCE-FK1524SS	15.00	24.00	P2	618.41
SCE-FK2410SS	24.00	10.00	P2	581.16
SCE-FK2412SS	24.00	12.00	P2	608.48
SCE-FK1212SS6	12.00	12.00	P2	524.53
SCE-FK1218SS6	12.00	18.00	P2	628.84
SCE-FK1224SS6	12.00	24.00	P2	663.12
SCE-FK1512SS6	15.00	12.00	P2	643.74
SCE-FK1518SS6	15.00	18.00	P2	701.87
SCE-FK1524SS6	15.00	24.00	P2	742.09
SCE-FK2412SS6	24.00	12.00	P2	730.18

Available within 10 working days if not in stock

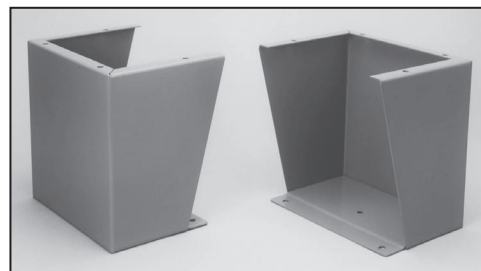


Phone (989) 799-6871

Fax (989) 799-4524

SCE SAGINAW
CONTROL &
ENGINEERING
Your Enclosure Source®

Catalog No.	Enclosure Height	Enclosure Width	Product Code	List Price
SCE-ELFM12H	12.00		P2	51.20
SCE-ELFM16H	16.00		P2	54.47
SCE-ELFM20H	20.00		P2	56.85
SCE-ELFM24H	24.00		P2	60.89
SCE-ELFM30H	30.00		P2	64.95
SCE-ELFM36H	36.00		P2	70.16
SCE-ELFM12HSS	12.00		P2	122.88
SCE-ELFM16HSS	16.00		P2	130.73
SCE-ELFM20HSS	20.00		P2	136.44
SCE-ELFM24HSS	24.00		P2	146.14
SCE-ELFM30HSS	30.00		P2	155.88
SCE-ELFM36HSS	36.00		P2	168.38
SCE-ELFM12W		12.00	P2	47.10
SCE-ELFM16W		16.00	P2	50.33
SCE-ELFM20W		20.00	P2	52.75
SCE-ELFM24W		24.00	P2	56.79
SCE-ELFM30W		30.00	P2	60.85
SCE-ELFM36W		36.00	P2	66.10
SCE-ELFM12WSS		12.00	P2	113.04
SCE-ELFM16WSS		16.00	P2	120.79
SCE-ELFM20WSS		20.00	P2	126.60
SCE-ELFM24WSS		24.00	P2	136.60
SCE-ELFM30WSS		30.00	P2	146.04
SCE-ELFM36WSS		36.00	P2	158.64

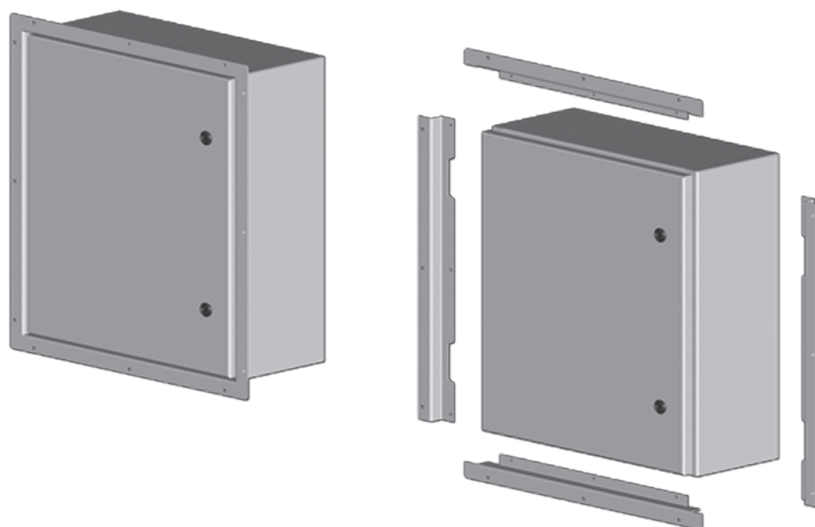

MOUNTING OPTIONS

EL Flush Mount Frame

Flush Mount Frames are designed for use with the Enviroline® Series Wall-Mount Enclosures, quickly converting the wall-mount enclosure to a flush mount enclosure.

Two part numbers are required to complete the assembly: one part number for the height of the enclosure and one part number for the width of the enclosure.

All kits are provided with hardware to assemble the frame to the enclosure and maintain the environmental rating of the enclosure. For technical information, consult our Installation Manual at www.saginawcontrol.com. Frame is made of heavy gauge steel and finished with ANSI-61 gray powder coat. "SS" parts are made of heavy gauge Type 316/316L stainless steel with #4 brush finish.

MOUNTING PANELS

SUB-PANELS

Construction -

Sub-panels are constructed from carbon steel. Size determines steel thickness.

Finish -

Powder coated white.

Options -


Configuration A - Add (SS) to the end of the sub-panel part number. (Example: SCE-12P10SS). Sub-panels are made of 316/316L stainless steel.

Configuration B & C - Add (SS) to the end of the sub-panel part number for 304 stainless steel (Example: SCE-30P30SS). Add (SS6) to the end of the sub-panel part number for 316/316L stainless steel (Example: SCE-30P30SS6).

Available within 10 working days if not in stock

Catalog No.	Height (A)	Width (B)	Configuration	Edge Flanges	Product Code	List Price
SCE-6P4	4.88	2.88	A	Flat	P3	3.01
SCE-6P6	4.88	4.88	A	Flat	P3	3.61
SCE-8P6	6.75	4.88	A	Flat	P3	4.17
SCE-8P8	6.75	6.88	A	Flat	P3	4.89
SCE-10P8	8.75	6.88	A	Flat	P3	5.70
SCE-10P10	8.75	8.88	A	Flat	P3	6.73
SCE-12DLP12	9.00	9.00	B	Flat	P3	13.67
SCE-12P10	10.75	8.88	C	Four	P3	7.72
SCE-12P12	10.75	10.88	A	Flat	P3	9.08
SCE-12P24	9.00	21.00	A	Flat	P3	27.86
SCE-12P6	10.75	4.88	A	Flat	P3	5.35
SCE-14P8	12.75	6.88	A	Flat	P3	7.39
SCE-14P12	12.75	10.88	A	Flat	P3	10.13
SCE-16P12	13.00	9.00	B	Flat	P3	14.81
SCE-16DLP14	13.00	11.00	B	Flat	P3	17.72
SCE-16P16	13.00	13.00	B	Flat	P3	24.57
SCE-16P10	14.75	8.88	A	Flat	P3	9.90
SCE-16P14	14.75	12.88	A	Flat	P3	19.95
SCE-20P12	17.00	9.00	B	Flat	P3	23.14
SCE-20P16	17.00	13.00	B	Flat	P3	30.37
SCE-20P20	17.00	17.00	B	Flat	P3	35.44
SCE-24P16	21.00	13.00	C	Two	P3	32.92
SCE-24P20	21.00	17.00	C	Two	P3	45.57
SCE-24P24	21.00	21.00	C	Four	P3	53.18
SCE-30P16	27.00	13.00	C	Two	P3	45.57
SCE-30P20	27.00	17.00	C	Two	P3	55.70
SCE-30P24	27.00	21.00	C	Four	P3	63.29
SCE-30P30	27.00	27.00	C	Four	P3	83.55
SCE-36P16	33.00	13.00	C	Two	P3	53.18
SCE-36P24	33.00	21.00	C	Four	P3	75.96
SCE-36P30	33.00	27.00	C	Four	P3	101.27
SCE-36P36	33.00	33.00	C	Four	P3	118.99
SCE-40P24	37.00	21.00	C	Four	P3	86.08
SCE-42P24	39.00	21.00	C	Four	P3	91.14
SCE-42P30	39.00	27.00	C	Four	P3	116.47
SCE-42P36	39.00	33.00	C	Four	P3	136.72
SCE-42P42	39.00	39.00	C	Four	P3	156.97
SCE-48P48	44.00	44.00	C	Four	P3	212.67
SCE-48P24	45.00	21.00	C	Four	P3	98.74
SCE-48P30	45.00	27.00	C	Four	P3	129.13
SCE-48P36	45.00	33.00	C	Four	P3	154.46
SCE-48P42	45.00	39.00	C	Four	P3	177.24
SCE-60BFP42	56.00	38.00	C	Four	P3	230.41
SCE-60PC36	55.63	33.00	C	Four	P3	181.41
SCE-60P24	57.00	21.00	C	Four	P3	129.13
SCE-60P30	57.00	27.00	C	Four	P3	159.52
SCE-60P36	57.00	33.00	C	Four	P3	189.89
SCE-60P48	56.00	44.00	C	Four	P3	268.38
SCE-60P60	56.00	56.00	C	Four	P3	331.68
SCE-64P25	60.00	21.75	C	Four	P3	159.52
SCE-64P31	60.00	27.75	C	Four	P3	167.11
SCE-64P37	60.00	33.75	C	Four	P3	182.30

Catalog No.	Height (A)	Width (B)	Configuration	Edge Flanges	Product Code	List Price
SCE-64P52	60.00	48.00	C	Four	P3	334.21
SCE-64P64	60.00	60.00	C	Four	P3	362.06
SCE-64P76	60.00	72.00	C	Four	P3	425.36
SCE-72P60	68.00	56.00	C	Four	P3	394.98
SCE-72P72	68.00	68.00	C	Four	P3	470.93
SCE-72P30	69.00	27.00	C	Four	P3	210.15
SCE-72P36	69.00	33.00	C	Four	P3	225.33
SCE-76P37	72.00	33.75	C	Four	P3	250.65
SCE-76P76	72.00	72.00	C	Four	P3	498.78
SCE-82P37	78.00	33.75	C	Four	P3	278.51
SCE-82P76	78.00	72.00	C	Four	P3	501.32

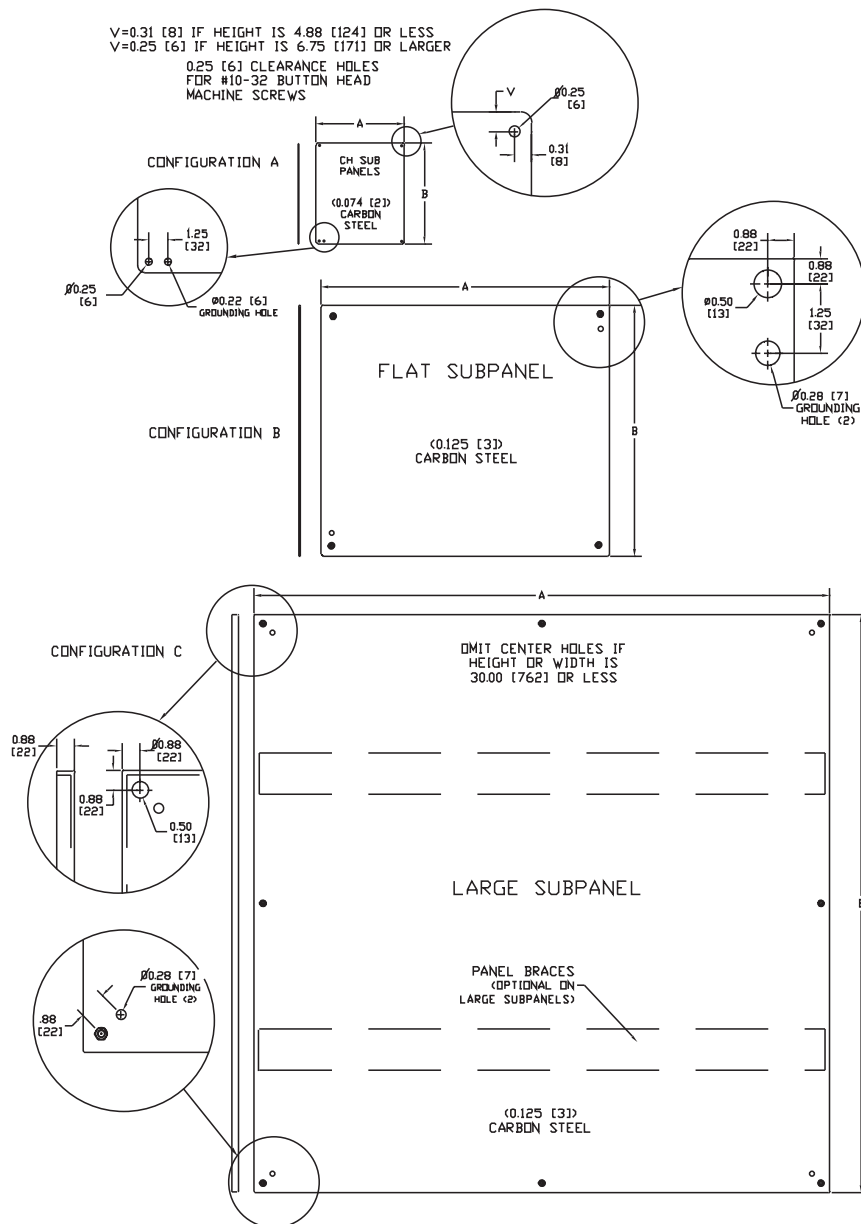

MOUNTING PANELS

SUB-PANELS

Construction -

Sub-panels are constructed from carbon steel. Size determines steel thickness.

Finish -

Powder coated white.

Options -

Configuration A - Add (SS) to the end of the sub-panel part number. (Example: SCE-12P10SS). Sub-panels are made of 316/316L stainless steel.

Configuration B & C - Add (SS) to the end of the sub-panel part number for 304 stainless steel (Example: SCE-30P30SS). Add (SS6) to the end of the sub-panel part number for 316/316L stainless steel (Example: SCE-30P30SS6).

Available within 10 working days if not in stock


MOUNTING PANELS

GALVANIZED SUB-PANELS

Sub-panels are constructed from galvanized steel for direct bonding of electrical components. Size determines steel thickness.

Catalog No.	Height (A)	Width (B)	Configuration	Edge Flanges	Product Code	List Price
SCE-6P4GALV	4.88	2.88	A	Flat	P3	3.01
SCE-6P6GALV	4.88	4.88	A	Flat	P3	3.61
SCE-8P6GALV	6.75	4.88	A	Flat	P3	4.17
SCE-8P8GALV	6.75	6.88	A	Flat	P3	4.89
SCE-10P8GALV	8.75	6.88	A	Flat	P3	5.70
SCE-10P10GALV	8.75	8.88	A	Flat	P3	6.73
SCE-12DLP12GALV	9.00	9.00	B	Flat	P3	13.67
SCE-12P24GALV	9.00	21.00	C	Four	P3	27.86
SCE-12P6GALV	10.75	4.88	A	Flat	P3	5.35
SCE-12P10GALV	10.75	8.88	A	Flat	P3	7.72
SCE-12P12GALV	10.75	10.88	A	Flat	P3	9.08
SCE-14P8GALV	12.75	6.88	A	Flat	P3	7.39
SCE-14P12GALV	12.75	10.88	A	Flat	P3	10.13
SCE-16P12GALV	13.00	9.00	B	Flat	P3	14.81
SCE-16DLP14GALV	13.00	11.00	B	Flat	P3	17.72
SCE-16P16GALV	13.00	13.00	B	Flat	P3	24.57
SCE-16P10GALV	14.75	8.88	A	Flat	P3	9.90
SCE-16P14GALV	14.75	12.88	A	Flat	P3	19.95
SCE-20P12GALV	17.00	9.00	B	Flat	P3	23.14
SCE-20P16GALV	17.00	13.00	B	Flat	P3	30.37
SCE-20P20GALV	17.00	17.00	B	Flat	P3	35.44
SCE-24P16GALV	21.00	13.00	C	Two	P3	32.92
SCE-24P20GALV	21.00	17.00	C	Two	P3	47.85
SCE-24P24GALV	21.00	21.00	C	Four	P3	55.84
SCE-30P16GALV	27.00	13.00	C	Two	P3	47.85
SCE-30P20GALV	27.00	17.00	C	Two	P3	58.49
SCE-30P24GALV	27.00	21.00	C	Four	P3	66.45
SCE-30P30GALV	27.00	27.00	C	Four	P3	87.73
SCE-36P16GALV	33.00	13.00	C	Two	P3	55.84
SCE-36P24GALV	33.00	21.00	C	Four	P3	79.76
SCE-36P30GALV	33.00	27.00	C	Four	P3	111.40
SCE-36P36GALV	33.00	33.00	C	Four	P3	130.89
SCE-40P24GALV	37.00	21.00	C	Four	P3	94.69
SCE-42P24GALV	39.00	21.00	C	Four	P3	100.25
SCE-42P42GALV	39.00	39.00	C	Four	P3	180.52
SCE-42P30GALV	39.00	27.00	C	Four	P3	128.12
SCE-42P36GALV	39.00	33.00	C	Four	P3	157.23
SCE-48P48GALV	44.00	44.00	C	Four	P3	244.57
SCE-48P24GALV	45.00	21.00	C	Four	P3	108.61
SCE-48P30GALV	45.00	27.00	C	Four	P3	142.04
SCE-48P36GALV	45.00	33.00	C	Four	P3	177.63
SCE-48P42GALV	45.00	39.00	C	Four	P3	203.83
SCE-60BFP42GALV	56.00	38.00	C	Four	P3	264.97
SCE-60P48GALV	56.00	44.00	C	Four	P3	308.64
SCE-60P60GALV	56.00	56.00	D	Four	P3	381.43
SCE-60P24GALV	57.00	21.00	C	Four	P3	142.04
SCE-60P30GALV	57.00	27.00	C	Four	P3	183.45
SCE-60P36GALV	57.00	33.00	C	Four	P3	218.37
SCE-64P25GALV	60.00	21.75	C	Four	P3	183.45
SCE-64P31GALV	60.00	27.75	C	Four	P3	192.18
SCE-64P37GALV	60.00	33.75	C	Four	P3	209.65

Catalog No.	Height (A)	Width (B)	Configuration	Edge Flanges	Product Code	List Price
SCE-64P52GALV	60.00	48.00	D	Four	P3	384.34
SCE-64P64GALV	60.00	60.00	D	Four	P3	452.58
SCE-64P76GALV	60.00	72.00	D	Four	P3	531.70
SCE-72P60GALV	68.00	56.00	D	Four	P3	454.23
SCE-72P72GALV	68.00	68.00	D	Four	P3	588.66
SCE-72P30GALV	69.00	27.00	C	Four	P3	241.67
SCE-72P36GALV	69.00	33.00	C	Four	P3	259.13
SCE-76P37GALV	72.00	33.75	C	Four	P3	288.25
SCE-76P76GALV	72.00	72.00	D	Four	P3	623.48
SCE-82P37GALV	78.00	33.75	C	Four	P3	320.29
SCE-82P76GALV	78.00	72.00	D	Four	P3	626.65

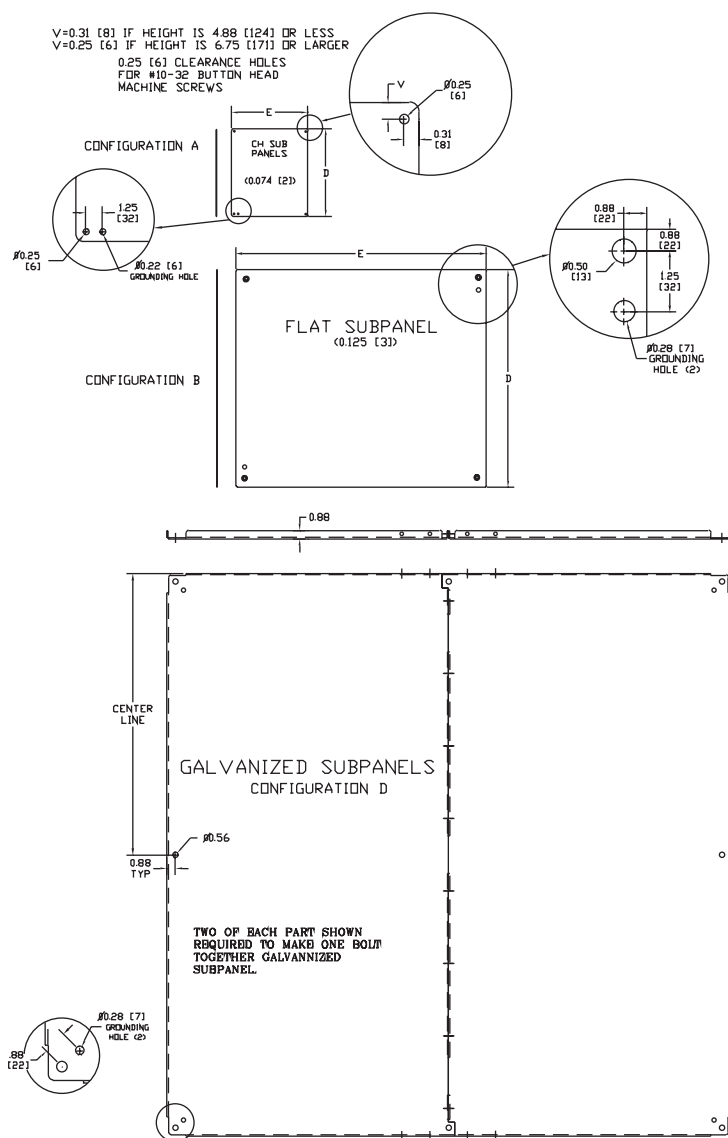

MOUNTING PANELS

GALVANIZED SUB-PANELS

Sub-panels are constructed from galvanized steel for direct bonding of electrical components. Size determines steel thickness.

MOUNTING PANELS

Aluminum Sub-Panels For Fiberglass Enclosures

Designed to mount in the back of an enclosure. Made of marine grade aluminum.


Filler Plates

Designed to provide additional mounting surface between sub-panels in a large enclosure or between sub-panels or sections of a modular enclosure. Slotted mounting holes allow flexible installation. Panels are powder coated white.


Catalog No.	Height (A)	Width (B)	Edge Flanges	Product Code
SCE-6P4AL	4.88	2.88	Flat	F2
SCE-6P6AL	4.88	4.88	Flat	F2
SCE-8P6AL	6.88	4.88	Flat	F2
SCE-8P8AL	6.75	6.88	Flat	F2
SCE-10P8AL	8.88	6.88	Flat	F2
SCE-12P10AL	10.88	8.88	Flat	F2
SCE-12P12AL	10.88	10.88	Flat	F2
SCE-14P8AL	12.88	5.88	Flat	F2
SCE-14P12AL	12.88	10.88	Flat	F2
SCE-16P10AL	13.00	8.50	Flat	F2
SCE-16P14AL	14.88	12.88	Flat	F2
SCE-18P16AL	16.88	14.88	Flat	F2
SCE-20P16AL	17.00	13.00	Flat	F2
SCE-20PJ16AL	18.88	14.88	Flat	F2
SCE-24P12AL	21.00	9.00	Flat	F2
SCE-24P20AL	21.00	17.00	Formed	F2
SCE-30P20AL	27.00	17.00	Formed	F2
SCE-30P24AL	27.00	21.00	Formed	F2
SCE-36P30AL	33.00	27.00	Formed	F2
SCE-36P36AL	31.00	33.00	Formed	F2
SCE-48P36AL	45.00	33.00	Formed	F2
SCE-60P36AL	57.00	33.00	Formed	F2

Catalog No.	Height (D)	Width	Enclosure Height	Product Code	List Price
SCE-72FP	60.00	9.75	72.00	P3	78.49
SCE-84FP	72.00	9.75	84.00	P3	88.62
SCE-90FP	78.00	9.75	90.00	P3	96.21


Available within 10 working days if not in stock

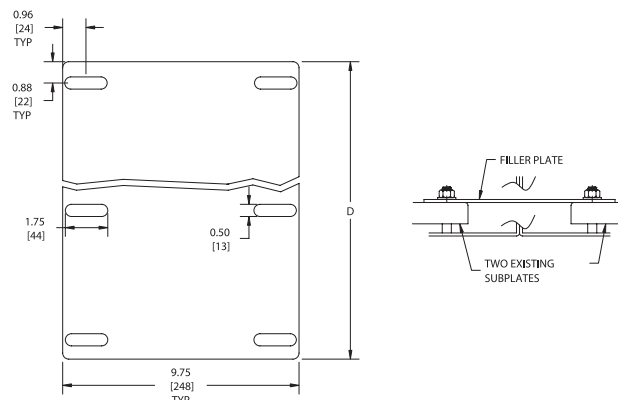

Catalog No.	Height (A)	Width (B)	Product Code	List Price
SCE-6N6MP	4.00	4.00	N1	2.82
SCE-8N6MP	6.00	4.00	N1	3.26
SCE-8N8MP	6.00	6.00	N1	3.82
SCE-10N8MP	8.00	6.00	N1	4.46
SCE-10N10MP	8.00	8.00	N1	5.27
SCE-12N10MP	10.00	8.00	N1	6.03
SCE-12N12MP	10.00	10.00	N1	7.10
SCE-14N12MP	12.00	10.00	N1	7.92
SCE-16N12MP	14.00	10.00	N1	11.58
SCE-16N16MP	14.00	14.00	N1	19.21
SCE-20N16MP	18.00	14.00	N1	21.62
SCE-20N20MP	18.00	18.00	N1	27.84
SCE-24N16MP	22.00	14.00	N1	22.89
SCE-24N20MP	22.00	18.00	N1	31.67
SCE-24N24MP	22.00	22.00	N1	36.97
SCE-30N24MP	28.00	22.00	N1	43.99
SCE-30N30MP	28.00	28.00	N1	58.07
SCE-36N24MP	34.00	22.00	N1	52.80
SCE-36N30MP	34.00	28.00	N1	70.39

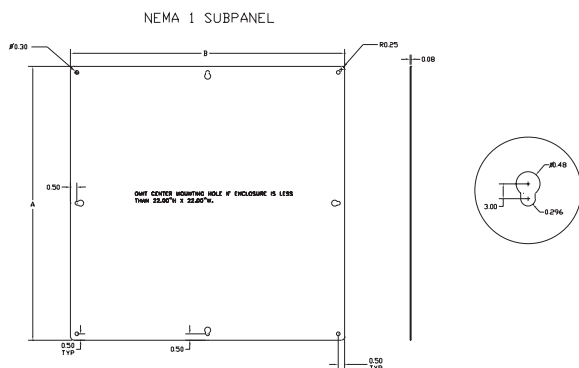

Catalog No.	Notes	Product Code	List Price
SCE-FSPS4	Set of 4	P2	55.88
SCE-FSPS6	Set of 6	P2	84.44
SCE-FSPS8	Set of 8	P2	126.66



MOUNTING PANELS

Type 1 Sub-Panels

Designed to be used with Nema 1 enclosures. Made of heavy gauge steel and powder coated white.

Individual Panel Supports


Individual Panel Supports are available for mounting sub-panels. Packaged in sets with all mounting hardware included. Made of heavy gauge steel and plated. For technical information, consult our Installation Manual at www.saginawcontrol.com.

Perforated Sub-Panels

Perforated Sub-Panels

Catalog No.	Height (A)	Width (B)	Product Code	List Price
SCE-6N6MPP	4.00	4.00	N1	7.36
SCE-8N6MPP	6.00	4.00	N1	8.71
SCE-8N8MPP	6.00	6.00	N1	9.83
SCE-10N8MPP	8.00	6.00	N1	11.58
SCE-10N10MPP	8.00	8.00	N1	13.47
SCE-12N10MPP	10.00	8.00	N1	15.11
SCE-12N12MPP	10.00	10.00	N1	15.94
SCE-14N12MPP	12.00	10.00	N1	17.14
SCE-16N12MPP	14.00	10.00	N1	19.25
SCE-16N16MPP	14.00	14.00	N1	22.58
SCE-20N16MPP	18.00	14.00	N1	26.46
SCE-20N20MPP	18.00	18.00	N1	30.55
SCE-24N16MPP	22.00	14.00	N1	30.55
SCE-24N20MPP	22.00	18.00	N1	36.52
SCE-24N24MPP	22.00	22.00	N1	53.44
SCE-30N24MPP	28.00	22.00	N1	68.13
SCE-30N30MPP	28.00	28.00	N1	85.12
SCE-36N24MPP	34.00	22.00	N1	85.12
SCE-36N30MPP	34.00	28.00	N1	100.48

NEMA 1 PERFORATED SUBPANEL

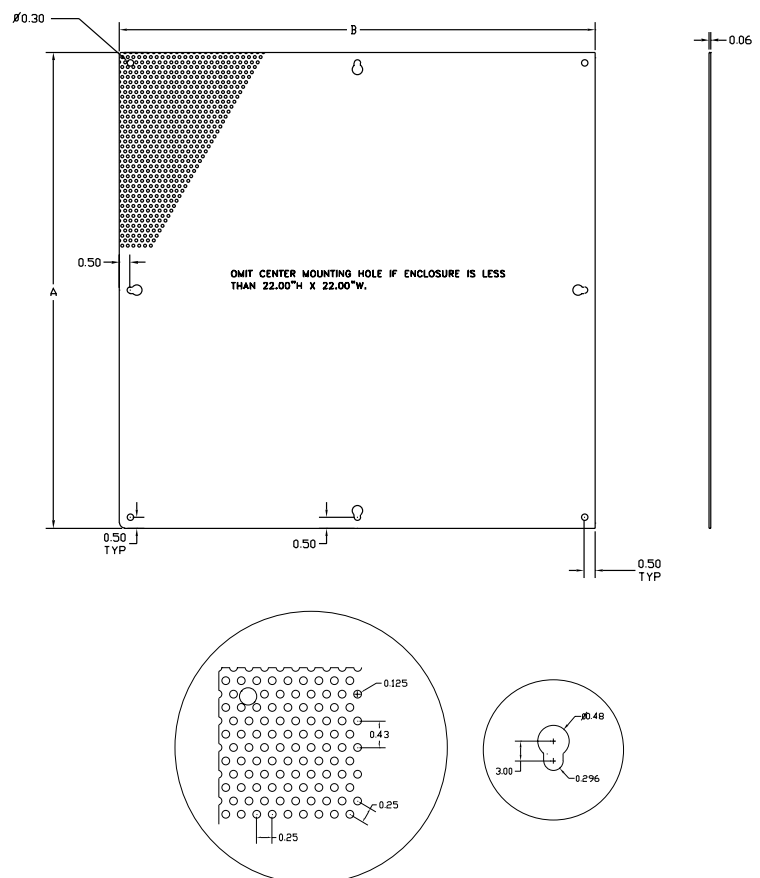

Catalog No.	Height (A)	Width (B)	Product Code	List Price
SCE-6P4J	5.00	3.00	P3	3.02
SCE-6P6J	5.00	5.00	P3	3.62
SCE-8P6J	7.00	5.00	P3	4.17
SCE-8P8J	7.00	7.00	P3	4.89
SCE-10P8J	9.00	7.00	P3	5.70
SCE-10P10J	9.00	9.00	P3	6.73
SCE-12P10J	11.00	9.00	P3	7.72
SCE-12P12J	11.00	11.00	P3	9.08
SCE-14P12J	13.00	11.00	P3	10.13
SCE-16P14J	15.00	13.00	P3	19.96
SCE-20P16J	19.00	15.00	P3	30.40
SCE-20P20J	19.00	19.00	P3	35.44

Catalog No.	Height (A)	Width (B)	Product Code	List Price
SCE-9P12L	8.00	11.00	P3	18.86
SCE-9P18L	8.00	17.00	P3	26.63
SCE-9P24L	8.00	23.00	P3	29.14
SCE-9P30L	8.00	29.00	P3	31.92
SCE-9P36L	8.00	35.00	P3	34.97

Enclosure Size - 0.75 = Sub-Panel Size



MOUNTING PANELS

Enviroline® Junction Enclosure (ELJ) Sub-Panels

Designed to be used with Enviroline® Series Junction Enclosures. Made of heavy gauge steel and powder coated white.

Enviroline® Trough Enclosure (ELJ) Sub-Panels

Designed to be used with Enviroline® Series Trough Enclosures. Made of heavy gauge steel and powder coated white.

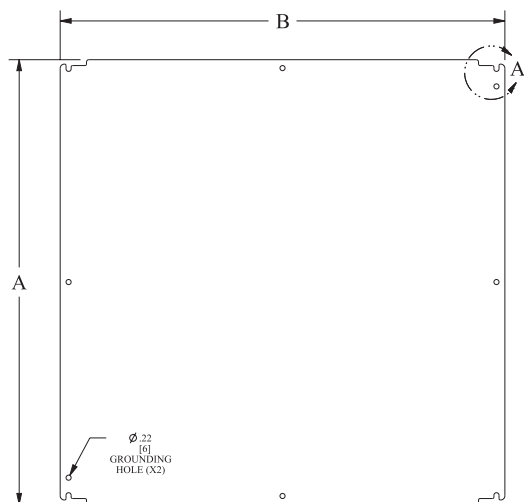

DETAIL A

MOUNTING HOLE NOTES:
 1. Omit center mounting holes top and bottom when sub-panel width is < 15.00
 2. Omit center mounting holes left and right when height is < 15.00

MOUNTING PANELS

Dead Front Panel For Wall-Mount Enclosures

Designed for installation into Enviroline® Series wall-mount enclosures, to be installed in the front of an enclosure and to swing out of the enclosure. Kit consists of heavy gauge brackets, hinges, and mounting hardware. Installed by detaching door hinge from enclosure and installing swing out panel kit to the existing holes. Hinge supplied with the enclosure. Made of steel and powder coated white.



Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Dead Front Panel For CHNF & ELJ Enclosures


Designed for installation into Enviroline® Series junction enclosures and continuous hinged junction enclosures, to be installed in the front of an enclosure and to swing out of the enclosure. Kit consists of heavy gauge brackets, hinges, and mounting hardware. Installed by drilling hole in the side of the enclosure. Made of steel and powder coated white.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Catalog No.	Height	Width	Product Code	List Price
SCE-DF20EL16LP	16.00	12.63	P2	72.59
SCE-DF20EL20LP	16.00	16.63	P2	77.44
SCE-DF24EL20LP	20.00	16.63	P2	80.84
SCE-DF24EL24LP	20.00	20.63	P2	87.32
SCE-DF30EL20LP	26.00	16.63	P2	92.80
SCE-DF30EL24LP	26.00	20.63	P2	98.27
SCE-DF30EL30LP	26.00	26.63	P2	116.19
SCE-DF36EL20LP	32.00	17.63	P2	105.54
SCE-DF36EL24LP	32.00	20.63	P2	113.74
SCE-DF36EL30LP	32.00	26.63	P2	134.11
SCE-DF36EL36LP	32.00	32.63	P2	152.14
SCE-DF42EL24LP	38.00	20.63	P2	131.34
SCE-DF42EL30LP	38.00	26.63	P2	154.88
SCE-DF42EL36LP	38.00	32.63	P2	170.17
SCE-DF48EL24LP	44.00	20.63	P2	158.72
SCE-DF48EL36LP	44.00	32.63	P2	189.95
SCE-DF60EL36LP	56.00	32.63	P2	224.79
SCE-DF72EL36LP	68.00	32.63	P2	236.75



WALL MOUNT
SCE-DFxxELxxLP





Enclosures 20 Inches High and Less



Enclosures Greater than 20 Inches

Catalog No.	Height	Width	Product Code	List Price
SCE-DFJ1008	8.50	6.50	P2	49.54
SCE-DFJ1210	10.50	8.50	P2	53.75
SCE-DFJ1212	10.50	10.50	P2	55.79
SCE-DFJ1412	12.50	10.50	P2	57.83
SCE-DFJ1614	14.50	12.50	P2	62.22
SCE-DFJ2016	18.50	14.50	P2	67.54




CHNF / ELJ
SCE-DF Jxx




Phone (989) 799-6871
Fax (989) 799-4524




Catalog No.	Height	Width	Qty. Per Kit	Product Code	List Price
SCE-DF60EL48	56.00	19.88	1	P2	345.67
SCE-DF60EL60	56.00	25.88	1	P2	385.11
SCE-DF72EL60	68.00	25.88	1	P2	425.77
SCE-DF72EL72	68.00	31.88	1	P2	475.40

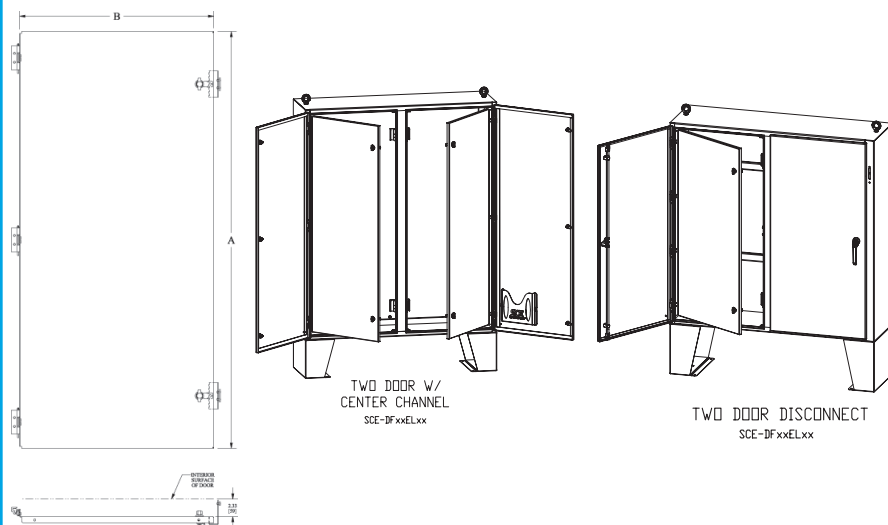

Catalog No.	Height	Width	Qty. Per Kit	Product Code	List Price
SCE-DF6048	56.00	22.13	1	P2	356.31
SCE-DF6060	56.00	28.13	1	P2	396.74
SCE-DF7260	68.00	28.13	1	P2	438.41
SCE-DF7272	68.00	34.13	1	P2	489.29

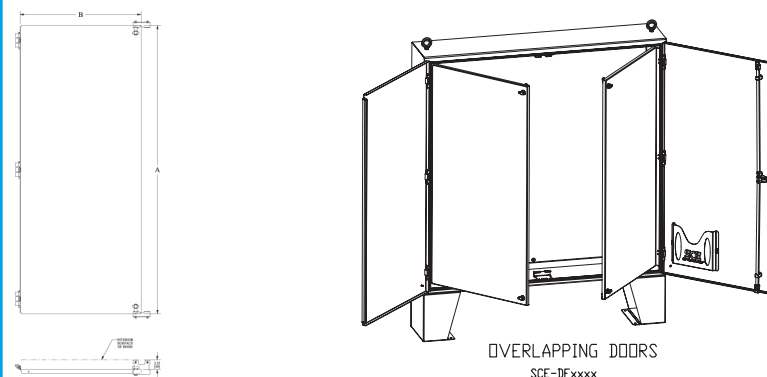

Catalog No.	Description	Product Code	List Price
SCE-115259	For use with Enviroline® Wall-Mount Enclosures	P2	34.43

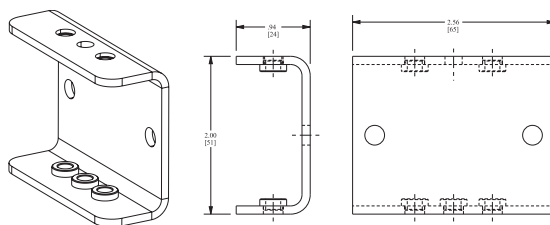

MOUNTING PANELS

Dead Front Panel For Two Door Enclosures with Center Channel

Designed for installation into Enviroline® Series two-door enclosures with center channel, to be installed in the front of an enclosure and to swing out of the enclosure. Kit consists of heavy gauge brackets, hinges, and mounting hardware. Installed by detaching door hinge from enclosure and installing swing out panel kit to the existing holes. Hinge is supplied with the enclosure. Made of steel and powder coated white. Kit contains one panel and all hardware for one dead front behind one door.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Dead Front Panel For Two Door Enclosures with Overlapping Doors

Designed for installation into two-door enclosures with overlapping doors, to be installed in the front of an enclosure and to swing out of the enclosure. Kit consists of heavy gauge brackets, hinges, and mounting hardware. Installed by detaching door hinge from enclosure and installing swing out panel kit to the existing holes. Hinge is supplied with the enclosure. Made of steel and powder coated white. Kit contains one panel and all hardware for one dead front behind one door.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Dead Front Extension Brackets for Wall Mount Enclosures

Designed to increase the distance from the door to the dead front. Brackets can be used when additional space is required when mounting parts to the dead front. Five brackets provided per kit.

MOUNTING PANELS

Swing Out Panel Kits For Type 4 & 12 Enclosures

Designed to allow a standard sub-panel to be installed in the front of an enclosure and to swing out of the enclosure. Kits consist of heavy gauge brackets and hinges. Installed by drilling small hole in the side of the enclosure and bolting the bracket in place. Sealing washers are provided to insure that the enclosure will meet original standards after installation. For use in any Type 4 & 12 LP style wall mount enclosure where A x B dimensions are 12" x 12" or larger.


Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Swing Out Panel Kits For Enviroline®, Wall-mount, 3R Hinged Enclosures


Designed to allow a standard sub-panel to be installed in the front of an enclosure and to swing out of the enclosure. Kit consists of heavy gauge brackets, hinges, and mounting hardware. Installed by detaching door hinge from enclosure and installing swing out panel kit to the existing holes and hinge supplied with the enclosure. Made of steel and zinc plated.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Catalog No.	Description	Product Code	List Price
SCE-NADFK	Swing Panel Kit (used with panels 30 inches and under)	P2	44.71
SCE-NADFK-3	Swing Panel Kit (used with panels over 30 inches)	P2	55.89
SCE-NADFKSS	Swing Panel Kit - Stainless Steel	P2	159.02

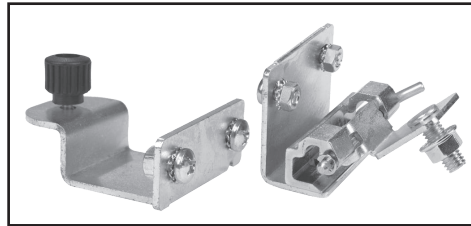


Catalog No.	Enclosure Height	Product Code	List Price
SCE-ELSP	12 to 16	P2	45.00
SCE-ELSP3	20 to 60	P2	56.00

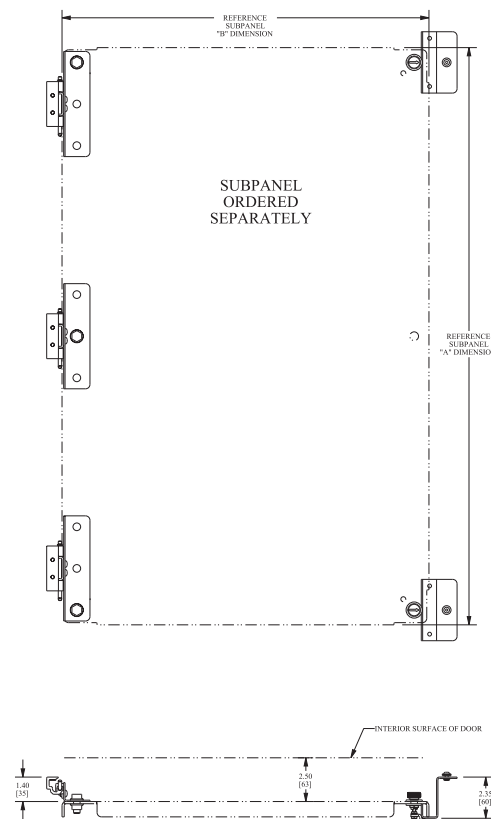

Phone (989) 799-6871
Fax (989) 799-4524

SCE SAGINAW
CONTROL &
ENGINEERING
Your Enclosure Source

Catalog No.	Height (A)	Width (B)	Product Code	List Price
SCE-BP72XM18	60.00	18.00	P2	239.58
SCE-BP72XM24	60.00	24.00	P2	260.66
SCE-BP84XM18	72.00	18.00	P2	254.10
SCE-BP84XM24	72.00	24.00	P2	277.23
SCE-BP90XM18	84.00	18.00	P2	270.84
SCE-BP90XM24	84.00	24.00	P2	294.94

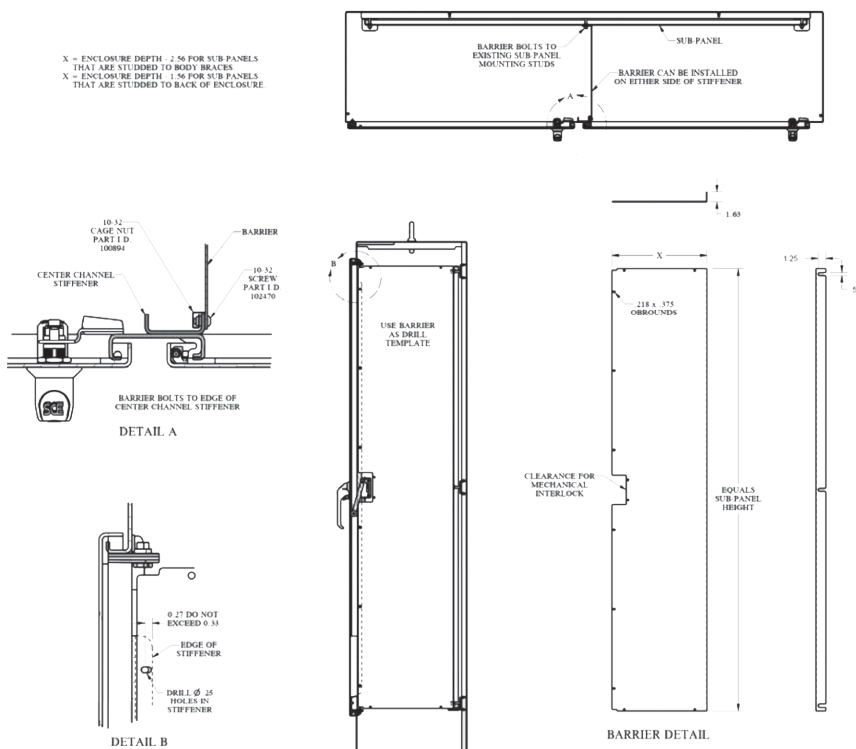

Catalog No.	For Use With	Length	Product Code	List Price
SCE-BPEX18	18 Inch Wide XM Barrier Plates	13.50	P2	91.48
SCE-BPEX24	24 Inch Wide XM Barrier Plates	19.50	P2	101.52

MOUNTING PANELS

XM Barrier Plates

Designed to be installed on the back panel of XM Enclosures to provide protection against Arc Flash the height of the sub-plate, and allowing you to separate the high voltage and low voltage within the enclosure. Made of heavy gauge carbon steel and powder coated white. Mounting hardware included.

Barrier Extension for XM Barrier Plates

Designed to be used with the XM Barrier Plates to extend the barrier, closing up the space between barrier plate and top or bottom of enclosure. Made of heavy gauge carbon steel and powder coated white.


MEDIA POCKETS & WINDOWS

Exterior Print Pocket

Designed for use on the exterior of an enclosure or door to keep prints clean and easy to access. Exterior print pockets have a hinged cover with cable stops to hold the door at 90 degrees open position and black quarter turn latches. Made of steel and powder coated RAL 7035 gray.

Provided with UL Recognized sealing washer to maintain Environmental Rating of the enclosure.

Catalog No.	Height	Width	Depth	Product Code	List Price
SCE-13ELJEXPP	13.00	19.00	2.45	P2	152.23
SCE-19ELJEXPP	19.00	13.00	2.45	P2	152.23

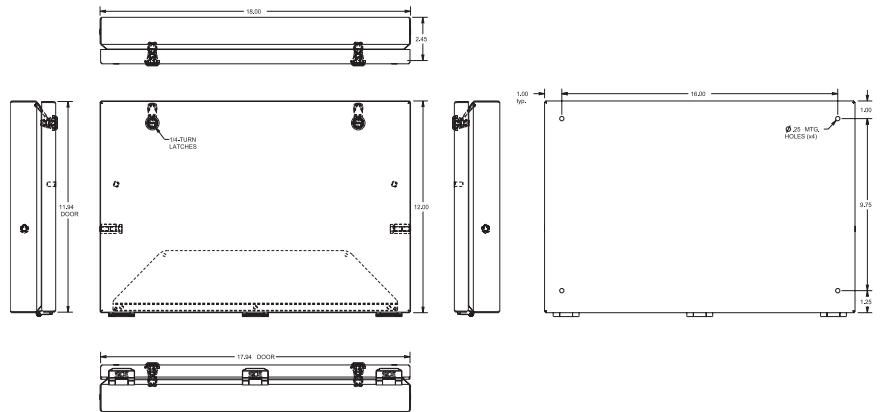

Media Storage Pockets

Designed to provide storage for electronic media. Padlockable. This pocket is not fire proof. Made of steel and powder coated white. For technical information, consult our Installation Manual at www.saginawcontrol.com.

Catalog No.	Description	Height	Width	Depth	Product Code	List Price
SCE-CDPK	CD Pocket	6.00	6.00	2.00	P2	124.18
SCE-DISPK	Disk Pocket	4.31	5.50	1.50	P2	124.18



Print Pockets

Designed to provide storage for prints on the interior of an enclosure. Intended for use as a replacement or as an additional pocket.

Catalog No.	Description	Height	Width	Depth	Product Code	List Price
SCE-PP7701	Small Standard Print Pocket White Polypropylene material	7.00	7.00	1.00	P2	22.35
SCE-PP101201	Large Standard Print Pocket White Polypropylene material	10.00	11.50	1.00	P2	24.84
SCE-PP101203	Extra Deep Print Pocket Heavy gauge steel powder coated white	10.00	11.50	3.00	P2	27.32




Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Viewing Area (L)	Viewing Area (W)	Cut-Out Size (G)	Cut-Out Size (H)	Height (A)	Width (B)	Product Code	List Price
SCE-PWK53NF	5.25	3.25	6.69	4.69	7.50	5.50	P2	99.34
SCE-PWK63NF	6.55	2.85	7.99	4.29	8.80	5.10	P2	109.28
SCE-PWK95NF	9.25	5.75	10.69	7.19	11.50	8.00	P2	119.22
SCE-PWK138NF	13.25	8.25	14.69	9.69	15.50	10.50	P2	151.50
SCE-PWK1711NF	17.25	11.25	18.69	12.69	19.50	13.50	P2	208.62
SCE-PWK2315NF	23.25	15.25	24.69	16.69	25.50	17.50	P2	257.05
SCE-PWK2919NF	29.25	19.25	30.69	20.69	31.50	21.50	P2	382.47

Stainless Steel

SCE-PWK53NFSS	5.25	3.25	6.69	4.69	7.50	5.50	P2	149.01
SCE-PWK95NFSS	9.25	5.75	10.69	7.19	11.50	8.00	P2	180.06
SCE-PWK138NFSS	13.25	8.25	14.69	9.69	15.50	10.50	P2	228.49
SCE-PWK1711NFSS	17.25	11.25	18.69	12.69	19.50	13.50	P2	300.51
SCE-PWK2315NFSS	23.25	15.25	24.69	16.69	25.50	17.50	P2	388.68
SCE-PWK2919NFSS	29.25	19.25	30.69	20.69	31.50	21.50	P2	576.19

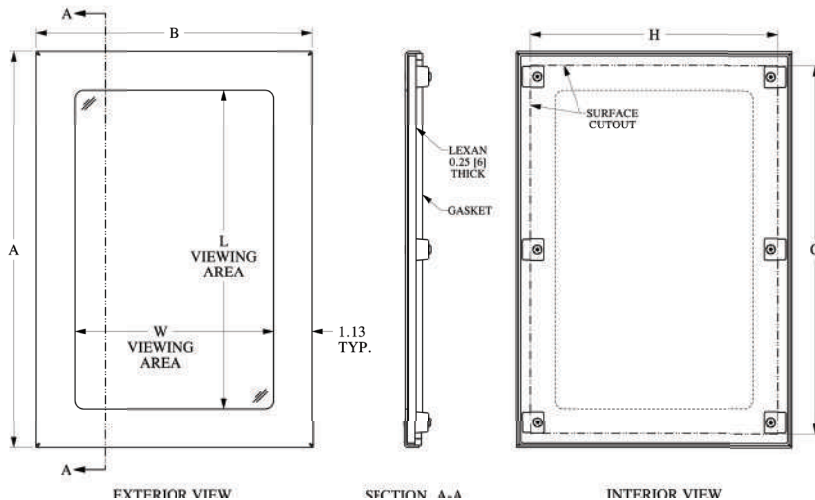

MEDIA POCKETS & WINDOWS

Window Kits

Designed for use on most SCE Type 4, 4X and 12 enclosures. Consists of frame, window, oil-resistant gasket, and mounting hardware. Installed by making a cutout in the enclosure and fastening the window and frame in place. For technical information, consult our Installation Manual at www.saginawcontrol.com. The window is 0.25" polycarbonate material. Made of heavy gauge steel and powder coated ANSI-61 gray. "SS" kits are made of Type 304 stainless with #4 brushed finish.

Protective Access Enclosures

Hinged Window Enclosure

Designed to mount on the exterior of an enclosure to provide protection for controls with easy access. Concealed hinges. Black mini quarter turn latches. Polycarbonate viewing window. Gasket and hardware included. For installation information, consult our Installation Manual at www.saginawcontrol.com. Made of heavy gauge carbon steel and powder coated ANSI-61 gray. "SS" parts made of heavy gauge stainless steel Type 304 with #4 brushed finish.

IS1 - Industry Standards -
NEMA Type 12 & Type 13
UL Listed Type 12
CSA Type 12
IEC 60529 IP 55

IS2 - Industry Standards -
NEMA Type 4, 12 & Type 23
UL Listed Type 4 & 12
CSA Type 4 & 12
IEC 60529 IP66

IS5 - Industry Standards -
NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

Hinged Access Enclosure

Designed to house electrical controls, instruments and components used in an indoor or outdoor environment to provide a degree of protection for the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); and provide a degree of protection with respect to the harmful effects on the equipment due to the ingress of water (rain, sleet, snow).


IS2 - Industry Standards -
NEMA Type 4, 12 & Type 23
UL Listed Type 4 & 12
CSA Type 4 & 12
IEC 60529 IP66

IS5 - Industry Standards -
NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66


Catalog No.	Height (A)	Width (B)	Depth (C)	Number Windows	Viewing Area Height x Width	Industry Standard	Product Code	List Price
SCE-HWK1212	12.00	12.00	1.50	1	8.00 x 7.38	IS2	P6	310.45
SCE-HWK1814	18.00	14.00	1.50	1	14.00 x 9.38	IS2	P6	360.12
SCE-HWK2218	22.00	18.00	1.50	1	18.00 x 13.38	IS1	P6	434.63
SCE-HWK2228	22.00	28.00	1.50	2	18.00 x 10.56	IS1	P6	496.72
SCE-HWK2822	28.00	22.00	1.50	2	10.88 x 17.38	IS1	P6	496.72

Stainless Steel


SCE-HWK1212SS	12.00	12.00	1.50	1	8.00 x 7.38	IS5	P6	640.77
SCE-HWK1814SS	18.00	14.00	1.50	1	14.00 x 9.38	IS5	P6	869.25
SCE-HWK2218SS	22.00	18.00	1.50	1	18.00 x 13.38	IS1	P6	1,048.07
SCE-HWK2228SS	22.00	28.00	1.50	2	18.00 x 10.56	IS1	P6	1,296.42
SCE-HWK2822SS	28.00	22.00	1.50	2	10.88 x 17.38	IS1	P6	1,296.42



SCE-HWK1212(SS)
SCE-HWK1814(SS)
SCE-HWK2218(SS)



SCE-HWK2228(SS)






SCE-HWK2822(SS)

Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	Product Code	List Price
SCE-HA1010	10.00	10.00	1.50	IS2	P6	247.95
SCE-HA1212	12.00	12.00	1.50	IS2	P6	268.92
SCE-HA1814	18.00	14.00	1.50	IS2	P6	318.22

Stainless Steel

SCE-HA1010SS	10.00	10.00	1.50	IS5	P6	566.45
SCE-HA1212SS	12.00	12.00	1.50	IS5	P6	592.52
SCE-HA1814SS	18.00	14.00	1.50	IS5	P6	811.61

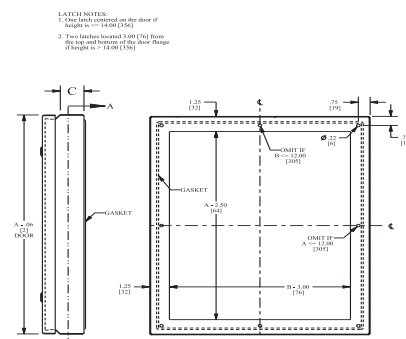


Phone (989) 799-6871

Fax (989) 799-4524

SCE SAGINAW
CONTROL &
ENGINEERING
Your Enclosure Source®

TYPE 1 INTERNAL DISCONNECT ENCLOSURE

Catalog No.	Description	Height	Width	Depth	Min Depth of Enclosure	Product Code	List Price
SCE-60AFSD	30 to 60 amp Non-fusible Disconnect & Small Circuit Breaker	13.50	12.00	6.50	10 inches	P2	126.84
SCE-100AFSD	30 to 100 amp Fusible Disconnect & Large Circuit Breaker	22.00	12.00	6.50	10 inches	P2	135.70
SCE-400AFSD	200 to 600 amp Fusible & Non-Fusible Disconnects	32.00	15.00	9.75	16 inches	P2	154.64

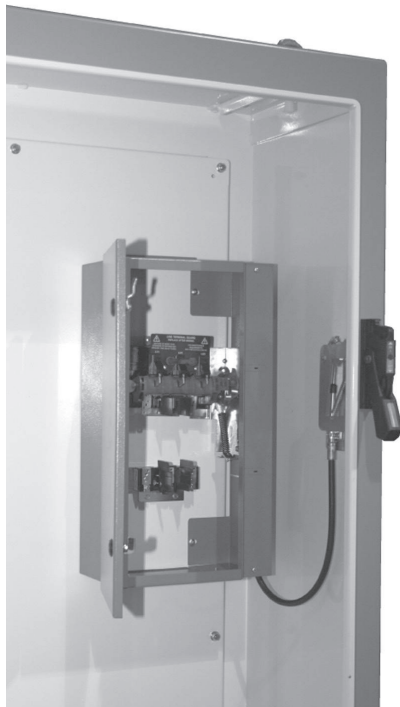

Protective Access Enclosures

INTERNAL DISCONNECT ENCLOSURE

Application -

Designed for use with enclosures that require additional protection against Arc Flash. This enclosure can be used within an environmentally rated enclosure to isolate the main power supply. Increasing personal protection by preventing incidental contact or exposure to the high voltage arc flash and shock hazard, and potentially reducing the PPE level for the lower risk components when the Internal Disconnect Enclosure cover is closed. The Internal Disconnect Enclosure can be easily incorporated into a new system or added to a pre-existing system on variable depth or cable operated disconnects. Aids in achieving compliance with NFPA 70E by concealing main power supply. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.060" carbon steel
- Enclosures are symmetrical for use with left or right hand disconnects.
- Removable continuous hinges.
- 110 degree door stop prevents incidental contact with other components.
- Black quarter turn latch.
- Black spring loaded quarter turn latch with 7mm square insert and key.
- Latches automatically when door is closed.
- Gland plate top and bottom provides easy installation of wires.
- Mounting holes provided in back for securing to the sub-panel.
- Ground stud on door and body.

Finish -

Orange Texture powder coated inside and out.

IS8 - Industry Standards -

Nema Type 1
UL Listed Type 1
CSA Type 1
IEC 60529 IP 30

Protective Access Enclosures

EXTERNAL DISCONNECT ENCLOSURE

Application -

Designed for use with enclosures that require additional protection against Arc Flash. This enclosure can be used with an environmentally rated enclosure to isolate the main power supply. Increasing personal protection by preventing incidental contact or exposure to the high voltage arc flash and shock hazard, and potentially reducing the PPE level for the lower risk components of the main enclosure. The External Disconnect Enclosure bolts to the exterior right side of a single or multi door primary enclosure. Aids in achieving compliance with NFPA 70E by concealing main power supply. For Installation Information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" carbon steel.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Black quarter turn latch.
- Collar studs provided for mounting panels.
- 31H X 12W galvanized sub-panel installed.
- Concealed hinge.
- Latches are opened or closed with a screwdriver.
- Mounting hardware included.
- Mechanical interlock and mounting hardware included.
- Mechanical defeater to bypass and open main enclosure requires Square 7 mm Key.

Finish -

ANSI-61 gray powder coated inside and out.

IS1 Industry Standards -

Nema Type 12 and Type 13
UL Listed Type 12
CSA Type 12
IEC 60529 IP 55

Catalog No.	Height	Width	Depth	Product Code	List Price
SCE-EXD18	34.50	14.00	18.00	P2	606.55



NOTES

Service Parts

Gasket Rolls

Oil-resistant gasket made of a urethane closed cell sponge material. Self adhesive backing. For installation information, consult our Installation Manual at www.saginawcontrol.com. UL, CSA recognized.

IS9 - Industry Standards -
UL Component Recognized
CSA Component Recognized

EMI/RFI Shielded Gasket

Specifically designed to combine outstanding attenuation characteristics and environmental protection against dust, dirt, moisture, and severe temperature variations. For Technical Information, consult our Installation Manual at www.saginawcontrol.com. Made of urethane foam wrapped in nickel plated copper fabric with adhesive backing.

Conductive Tape

Copper foil tape with conductive adhesive backing. Makes it unnecessary to plate an enclosure in preparation for shielding protection. Apply the tape over unprotected steel in a small free area around the perimeter of the door. Provides protection to the steel against corrosion and rusting as well as grounding protection necessary in shielding protection.

Mechanical Defeater for V-Style Disconnects


Designed to prevent the disconnect from being turned to the on position, until the master door is shut and the handle or latch is in the closed/latched position. Works with most standard enclosures with SCE three-point door hardware or quarter turn latches. For Technical Information, consult our Installation Manual at www.saginawcontrol.com.

Catalog No.	Length	Size	Product Code	List Price
SCE-GA14X1	40 Feet	0.25 x 1.00	P2	29.80
SCE-GA14X75	40 Feet	0.25 x 0.75	P2	28.56
SCE-GA18X75	80 Feet	0.13 x 0.75	P2	21.11

Catalog No.	Length	Size	Product Code	List Price
SCE-EMIG	7 Feet	0.25 x 1.00	P2	119.22

Catalog No.	Length	Size	Product Code	List Price
SCE-SLT	50 Feet	3 MILS x 1.00	P2	144.05

Catalog No.	Description	Product Code	List Price
SCE-MDV	Mechanical Defeater	P2	181.05

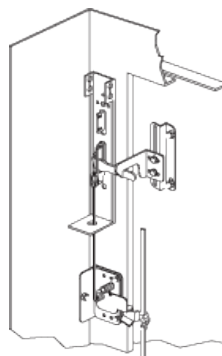

Phone (989) 799-6871
Fax (989) 799-4524



Catalog No.	Suitable For Use With	Qty. Per Kit	Product Code	List Price
SCE-BSW19SS	10-32	50	P2	20.43
SCE-BSW25SS	1/4-20	50	P2	21.69
SCE-BSW31SS	5/16	50	P2	22.38
SCE-BSW38SS	3/8	50	P2	29.95



Catalog No.	Description	Qty. Per Kit	Product Code	List Price
SCE-PS3816CN	3/8 - 16 Strut Nut	20	P2	42.22
SCE-PS1420CN	1/4-20 Strut Nut	20	P2	42.22



SCE-PS1420CN



SCE-PS3816CN

Catalog No.	Description	Qty. Per Kit	Product Code	List Price
SCE-PS1032CN	10-32 for Small Channel	20	P2	36.02



Catalog No.	Description	Qty. Per Kit	Product Code	List Price
SCE-CN1032	10-32 for Rack Angles	20	P2	32.31



Service Parts

Sealing Washers

Designed for use on the flat surface of environmentally rated enclosures to maintain the rating of type 2, 3, 3R, 3S, 4, 4X & 12 when holes for fastener must be provided for the installation of mounting brackets, drip shields and other accessories on the inside or outside of the enclosure body or doors.

IS10 - Industry Standards -
UL Component Recognized

Channel Nuts

Designed for use in free-standing enclosures to allow mounting of additional equipment.

Channel Nuts

Designed for use with the SCE light channels on the inside top of larger enclosures. For quick easy installation of lights.

Clamping Nuts

Clamping nuts with a #10-32 retained nut to fit all rack mounting angles and rack mounting frames to provide tapped holes. Nuts are zinc plated.

Service Parts

Touch Up Paint

12 ounce spray cans.

*Consult factory for pricing of custom colors.

Replacement Key

Standard keys for standard and optional door hardware.

Replacement Hinge

Standard hinges for standard SCE enclosures. Includes hinge, pin and clip.

Captive Screw

Standard captive screw for use on screw cover enclosures. Stainless steel with nylon retainer.

Catalog No.	Color	Product Code	List Price
SCE-TU05	White	P2	45.16
SCE-TU09	ANSI-61 Gray	P2	45.16

Catalog No.	Description	Qty. Per Package	Product Code	List Price
SCE-K333	Standard Key for Standard Quarter Turn	2	P2	6.56
SCE-KC101	Standard Key for SCE L-Handle	2	P2	6.56
SCE-2233X	Standard Key for Mini Quarter Turn	1	P2	11.50
SCE-110047	5mm Double Bit	1	P2	11.50
SCE-101695	7mm Square	1	P2	11.50
SCE-101697	8mm Square	1	P2	11.50
SCE-107930	7mm Triangular	1	P2	11.50

Catalog No.	Description	Qty. Per Package	Product Code	List Price
SCE-3916	Large Concealed Hinge	1	P2	10.27
SCE-3916SS	Large Concealed Stainless Steel Hinge	1	P2	21.69
SCE-3918	Small Concealed Hinge	2	P2	16.62
SCE-3918SS	Small Concealed Stainless Steel Hinge	2	P2	39.84
SCE-ELJHINGE	ELJ Hinge	1	P2	5.60
SCE-101670	Retaining Clip for Concealed Hinge	20	P2	10.57

Catalog No.	Description	Qty. Per Package	Product Code	List Price
SCE-102534	10-32 X 5/8 Captive Screw for PB & Screw Cover Enclosure	12	P2	19.03

Phone (989) 799-6871
Fax (989) 799-4524



Service Parts

Replacement Filter

Designed for use with SCE Fan Packages and Filter and Grille Package. Aluminum washable filters provide good air filtration.

Type 12 Replacement Filter

Designed for use with SCE Type 12 Fan Packages and Filter and Grille Package. Filters are made of non-woven polyolefin fiber. Washable up to 10 times.

Bolt Packs

Standard bolt packs for wall-mounting, sub-panels, and grounding for standard SCE enclosures.

Catalog No.	Fits Fan Package No.	Fits Filter Assembly No.	Qty. Per Package	Product Code	List Price
SCE-RF44	SCE-FA44/230	SCE-FGA44	1	P2	8.07
SCE-RF66	SCE-FA66/230	SCE-FGA66	1	P2	9.32
SCE-RF1010	SCE-FA1010/230	SCE-FGA1010	1	P2	17.38
SCE-RF517	SCE-BP115/230	SCE-FGA517	1	P2	12.78

Catalog No.	Fits Fan Package No.	Fits Filter Assembly No.	Qty. Per Package	Product Code	List Price
SCE-113947	SCE-N12FA44	SCE-N12FGA44	6	P2	65.57
SCE-113188	SCE-N12FA66	SCE-N12FGA66	6	P2	91.80
SCE-108401	SCE-N12FA1010	SCE-N12FGA1010	6	P2	117.05

Catalog No.	Description	Qty. Per Package	Product Code	List Price
SCE-101974	Wall Mount Bolt Pack 3/8-16	4	P2	5.00
SCE-102297	Sub-Panel Ground Kit 3/8-16	1	P2	2.50
SCE-102300	Sub-Panel Bolt Pack 3/8-16	8	P2	8.61
SCE-102686	ELJ Wall Mount Bolt Pack	4	P2	4.98
SCE-103736	MDV Bolt Pack	1	P2	63.20
SCE-102022	Standard Defeater Hook Bolt Pack	1	P2	36.82
SCE-101966	Grounding Kit 10-32	1	P2	2.50

NOTES

NOTES

Technical Information

NEMA

NEMA

NEMA

NEMA

NEMA



SAE

SAE

SAE

SAE

SAE

Technical Information

NEMA

NEMA

NEMA

NEMA

NEMA

Industry Standards..... 334 – 336



Thermal Management Chart..... 333



Material Specifications..... 334



Coating Performance 335



Gasket Performance..... 336



Hinge..... 338



General Product Information..... 339 – 341

SAE

SAE

SAE

SAE

SAE

INDUSTRY STANDARDS / SOURCES OF STANDARDS

These ratings are intended as a guide to help you select the proper enclosure for the environments where it will be installed. These rating descriptions are not complete representations of NEMA or IEC standards.

Type 1

For indoor use. To prevent accidental contact with enclosure equipment, in areas where unusual conditions do not exist. Protects against falling dirt.

Type 3

For indoor or outdoor use. To provide protection against falling dirt, rain, sleet, snow, windblown dust, and external formation of ice.

Type 3R

For indoor or outdoor use. To provide protection against windblown rain, snow, sleet, and external formation of ice.

Type 3S

For outdoor use to provide a degree of protection against wind blown dust, windblown rain and sleet; external mechanisms remain operable, while ice laden.

Type 4

For indoor or outdoor use. To provide protection against windblown rain and dust, splashing or hose directed water, and external formation of ice.

Type 4X

For indoor or outdoor use. To provide protection against windblown rain and dust, splashing or hose directed water, and external formation of ice. Corrosion resistant.

Type 6P

For indoor or outdoor use. To provide protection against falling dirt, hose directed water, entry of water during prolonged submersion at a limited depth, and external formation of ice.

Type 12

For indoor use. To provide protection against dust, falling dirt, dripping non-corrosive liquids, lint, fibers, external condensation of non-corrosive liquids, and light splashing of water.

Type 13

For indoor use primarily to provide a degree of protection against dust, spraying of water, oil, and noncorrosive coolant.

IP 30*

Protects against incidental contact with wiring and components.

IP 32*

Protects against incidental contact with wiring and components and spraying water 60 degrees from vertical.

IP 54*

Protected against the penetration of dust. Limited ingress with no harmful penetration of dust. Protected against water spray from all directions. Limited ingress permitted.

IP 66*

Totally protected against the penetration of dust. Protected against strong jets of water.

**IEC Publication 60529 Classification of degrees of protection by enclosures from surrounding environment.*

NEMA NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION

2101 L. Street Northwest • Washington, D.C. 20037

NEMA Standards Publication No. 250 - Enclosures for Electrical Equipment (1000 Volts Maximum)

NEMA Standards Publication No. ICS6 - Enclosures for Industrial Controls and Systems



INTERNATIONAL ELECTROTECHNICAL COMMISSION

3 Rue de Varembe • CH-1211 • Geneva 20, Switzerland

IEC 60529 Classification of Degrees of Protection Provided by Enclosures



UNDERWRITERS LABORATORIES, INC.

333 Plingsten Road • Northbrook, IL 60062-2096

UL50 Cabinets and Boxes

UL508 Industrial Control Equipment



CANADIAN STANDARDS ASSOCIATION

178 Rexdale Blvd. • Rexdale (Toronto), Ontario, Canada M9W 1R3

CSA Standard C22.2 No. 94 Industrial Control Equipment for Use in Ordinary (Non-Hazardous) Locations

NATIONAL FIRE PROTECTION ASSOCIATION

One Battery March Park • Quincy, MA 02269

NFPA 70 National Electrical (1999)

SAE SOCIETY OF AUTOMOTIVE ENGINEERS, INC.

MANUFACTURING STANDARDS OF GENERAL MOTORS, FORD MOTOR COMPANY, AND DAIMLER CHRYSLER CORP.

400 Commonwealth Drive • Warrendale, PA 15096-0001

SAE Supplement to NFPA 79-1991

FORD MANUFACTURING STANDARDS

Ford Motor Company • The American Road • Dearborn, MI 48121

INDUSTRY STANDARDS / CATALOG REFERENCES

On Each Catalog page you will find the Industry Standards as listed below identifying the industry standards to the series of parts on that page, adjacent to each part number you find a corresponding number IS1 through IS17 indicating the specific Industry Standards that apply to the specific part.

IS1 - Industry Standards -

NEMA Type 12 & Type 13
UL Listed Type 12
CSA Type 12
IEC 60529 IP 55

IS2 - Industry Standards -

NEMA Type 4, 12 & Type 13
UL Listed Type 4 & 12
CSA Type 4 & 12
IEC 60529 IP66

IS3 - Industry Standards -

NEMA Type 3R, 12 & Type 13
UL Listed Type 3R & 12
CSA Type 3R & 12
IEC 60529 IP55

IS4 - Industry Standards -

NEMA Type 3R, 4, 12 & Type 13
UL Listed Type 3R, 4, & 12
CSA Type 3R, 4 & 12
IEC 60529 IP66

IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12
CSA Type 3R, 4, 4X & 12
IEC 60529 IP66

IS7 - Industry Standards -

NEMA Type 3R
UL Listed Type 3R
CSA Type 3R
IEC 60529 IP32

IS8 - Industry Standards -

NEMA Type 1
UL Listed Type 1
CSA Type 1
IEC 60529 IP30

IS9 - Industry Standards -

UL Component Recognized
CSA Component Recognized

IS10 - Industry Standards -

UL Component Recognized

IS11 - Industry Standards -

UL Component Recognized Type 3R

IS16 - Industry Standards -

NEMA Type 3RX
UL Listed Type 3RX
CSA Type 3RX
IEC 60529 IP32

IS17 - Industry Standards -

NEMA Not Applicable
UL Not Applicable
CSA N/A

Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. Instructions are located on the enclosure door. Drip shield is required on IS3, drip shield is recommended on IS4 and IS6. Drain holes are required on all.

COMPARISON OF IEC AND CSA NEMA, UL AND CUL RATING

NEMA 250 and UL 50 specify requirements and test for the degree of protection against entry as well as environmental conditions such as falling dirt, ice, corrosion, oil and coolants whereas IEC 60529 does not have such requirements. Different rating requirements make comparison difficult and disagreements are common.

The IEC designation consist of the letters IP followed by two numerals. The first number indicates the degree and solid foreign objects entering the enclosure. The second number indicates the degree of protection provided by the enclosure with respect to the harmful ingress of water.

CAUTION IS NECESSARY WHEN ATTEMPTING TO EQUATE IEC AND NEMA ENCLOSURE RATINGS BECAUSE AN EXACT EQUIVALENCE IS NOT POSSIBLE.

IP FIRST CHARACTER	"TYPE" RATED ENCLOSURES														IP SECOND CHARACTER
	1	2	3	3R	3S	4	4X	5	6	6P	12	12K	13		
IP0_															IP_0
IP1_															IP_1
IP2_															IP_2
IP3_															IP_3
IP4_															IP_4
IP5_															IP_5
IP6_															IP_6
															IP_7
															IP_8
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	

A = IP FIRST CHARACTER

A shaded block in the "A" column indicates that the enclosure type exceeds the requirements for the respective IEC 60529 IP first character designation. The IP first character designation is the protection against access to hazardous parts and solid foreign objects.

B = SECOND CHARACTER

A shaded block in the "B" column indicates that the NEMA Enclosure type exceeds the requirements for the respective IEC 60529 IP second character designation. The IP second character designation is the protection against the ingress of water.

THERMAL MANAGEMENT

STEP #1

Determine the internal heat load in watts.

Help Note: 1 Watt=
3.413 BTU/Hr.nclosure.

STEP #2

Determine temperature difference between the maximum temperature outside the enclosure and the maximum allowable temperature inside the enclosure.

STEP #3

Plot your application on the chart.

- Find the internal heat load in watts. (vertical scale).
- Draw a horizontal line to the point of intersection with the diagonal line representing temperature difference.
- From that point extend a vertical line down to the horizontal scale to determine your CFM requirement.
- continue the vertical line to the table to identify applicable filter fan package(s).

STEP #4


Select the filter fan package and exhaust grille kit which best fits the application.

ENCLOSURE TEMPERATURE RISE
HEAT DISSIPATION IN ELECTRICAL ENCLOSURES.


$$\text{SURFACE AREA} = 2 [(\text{HEIGHT} \times \text{WIDTH}) + (\text{HEIGHT} \times \text{DEPTH}) + (\text{WIDTH} \times \text{DEPTH})] / 144 = \text{TOTAL Sq. FEET.}$$

$$\text{INPUT POWER} = \text{WATTS} / \text{TOTAL Sq. FEET} = \text{WATTS PER Sq. FOOT.}$$

EXAMPLE
SURFACE AREA = $2[(48 \times 36) + (48 \times 16) + (36 \times 16)] / 144 = 42 \text{ Sq. FEET.}$
INPUT POWER = $300 / 42 = 7.1 \text{ WATTS PER Sq. FOOT}$

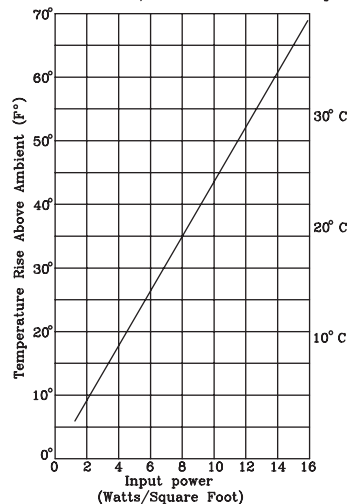

FAN BLOWER SELECTION

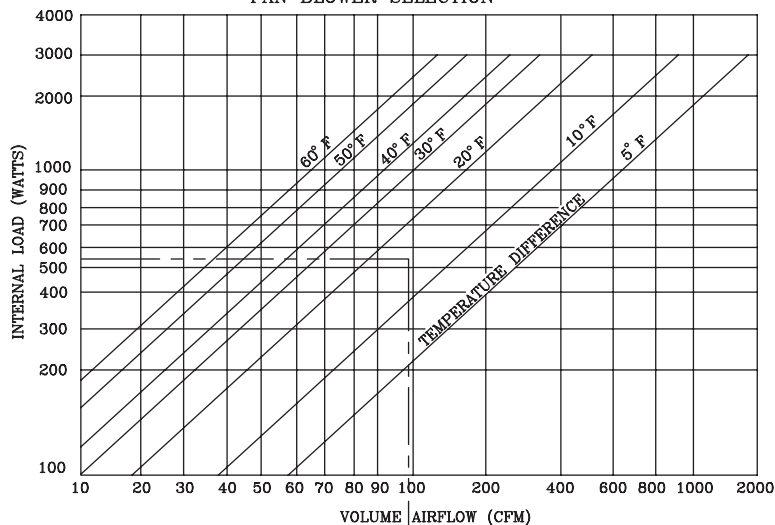

PART #S	AIR FLOW AT 50Hz
SCE-FA44 SCE-CF4	92/108 CFM
SCE-FA66 SCE-CF6	200/235 CFM
SCE-FA1010 SCE-CF10	455/550 CFM
SCE-BP115 SCE-BP230	276/324 CFM

CHART USED WITH 120 VOLT & 230 VOLT FANS.

SCE-FA (FAN PACKAGE) FILTER, FAN & GRILL.
SCE-CF (COOLING FAN) FAN MOTOR & FINGER GUARD.
SCE-BP (BLOWER PACKAGE)

EXAMPLE

An enclosure generates 500 watts of internal heat. Maximum temp. inside the enclosure is 100 F. The maximum temp. outside the enclosure is 85 F.

STEP #1 500 Watts

STEP #2 100 F-85 F=15 F
(internal temp. difference.)

STEP #3 Plot application .

STEP #4 Select best combination for filter fan package(s) and exhaust grille kit(s).

Alternate Method of Selection:

- Choose a filter fan package.
- Draw a vertical line from the fan package.
- Draw a horizontal line from the internal heat load in Watts.
- The point of intersection is the approximate internal temperature difference using the selected fan package.

HELP NOTES: ELECTRONIC CONVERSIONS

1 WATT=3.413 BTU
VOLTS X AMPS=WATTS

MATERIAL SPECIFICATIONS

Hot Rolled Steel (ASTM A569)

A low carbon, hot finished steel, produced by passing bar stock between a set of rolls at a temperature above the recrystallation temperature. Scale is removed by means of a hot, weak sulfuric acid bath, after which an oil film is applied.

Cold Rolled Steel (ASTM A366)

A low carbon, cold finished steel, produced by passing bar stock between a set of rolls.

Galvanized Steel (ASTM A526)

Steel which is zinc coated to provide corrosion resistance. Hot dip galvanizing is the most common method of applying zinc coating. Other methods include electrodeposition and metal spraying. Galvanizing provides protection against corrosion by serving as a sacrificial barrier and providing cathodic protection.

Galvannealed Steel (ASTM A525)

Steel which is zinc coated on both sides. It is designed to be used in the painted condition. Typically hot dipped to A40 and A60 designations.

Features of galvannealed steel:

- Corrosion resistance.
- Excellent for paint.
- Easy for weld.
- The combination of galvannealed steel and properly selected paint offers resistance to peeling and blistering.

Fiberglass

Thermoset polyester reinforced with glass fiber, processed by injection molding, compression molding, pultrusion, and open molding.

Features of fiberglass:

- High impact resistance.
- A superior range of temperature limits.
- Excellent dimensional stability.
- Excellent electrical properties.
- Excellent chemical resistance.
- Excellent moisture resistance.

Polyamide (Nylon)

A high performance thermoplastic processed by injection molding.

Features of polyamide:

- High impact resistance.
- Wide temperature limits.
- Excellent wear resistance.
- Excellent chemical resistance.

Stainless Steel (Type 304)

Stainless steel is a highly corrosion resistant iron based alloy containing between 18% and 20% chromium. Stainless steel is a good corrosion resistant material which is generally considered non-magnetic. It exhibits many of the same resistances attributed to fiberglass material and resistance to highly polar solvents such as acetone.

Stainless Steel (Type 316/316L)

Type 316/316L provides improved corrosion resistance to that of other chrome nickel steels. It is used when exposed to chemical corrodents, as well as marine atmospheres. It provides improved resistance to salt, some acids and high temperature. Resistance to sulfates and chlorine is less than type 304.

Aluminum (Type 5052)

A lightweight metal that forms a natural oxide layer which shields its surface from most corrosive elements. Type 5052 is the strongest non-heat treatable aluminum alloy.

Polycarbonate

A high performance thermoplastic resin that is processed by injection molding or sheet extrusion.

Features of polycarbonate:

- High impact resistance.
- A wide range of temperature limits.
- Good dimensional stability.
- Good electrical properties.

Polyester (PBT)

A high performance thermoplastic resin that is processed by injection molding.

Features of polyester:

- High impact resistance.
- A wide range of temperature limits.
- Good dimensional stability.
- Excellent electrical properties.
- Excellent chemical resistance.
- Excellent moisture resistance.

Zinc Die Casting (Zamak #5)

A zinc die cast is formed when a molten zinc alloy is forced under high pressure into a steel die. SCE uses zinc die casting application Zamak #5, which is the addition of approx. 1% copper to the #3 alloy. This increases the tensile strength of the casting approx. 15%.

Features of Zinc die casting:

- Zinc die castings are strong, economical and often cast to the exact shape needed without additional machining.
- Zinc is a non-ferrous metal, it will not rust.
- Zinc is an abundant natural element which is mined and used in many applications.

COATING PERFORMANCE CHARACTERISTICS

	POWDER COAT				HIGH SOLIDS	
	Polyester TGIC	Urethane	Hybrid	Epoxy	Monobake	Permaclad
Pencil Hardness	2H - 3H	H - 2H	H - 2H	3H - 5H	H - 2H	H - 2H
Stain Resistance	EXCELLENT	GOOD	GOOD	EXCELLENT	GOOD	GOOD
Adhesion to C.R.S.	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT	GOOD	EXCELLENT
Mar Resistance	EXCELLENT	GOOD	GOOD	EXCELLENT	GOOD	EXCELLENT
Chip Resistance	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT	GOOD	EXCELLENT
Flexibility	PASS 1/8"	PASS 1/8"	PASS 1/8"	PASS 1/8"	PASS 1/8"	PASS 1/8"
Direct Impact	60-160IN-LBS.	60-160IN-LBS.	60-160IN-LBS.	60-160IN-LBS.	60-160IN-LBS.	60-160IN-LBS.
Salt Spray	> 800 HRS	> 600 HRS	> 600 HRS	> 800 HRS	> 600 HRS	> 600 HRS
UV Resistance	EXCELLENT	EXCELLENT	POOR	POOR	POOR	EXCELLENT
Heat Resistance	300F	250F	250F	300F	250F	250F
Humidity	> 1200 HRS	> 1000 HRS	> 1000 HRS	> 1200 HRS	> 1000 HRS	> 1000 HRS
Solvent Resistance	GOOD	GOOD	GOOD	EXCELLENT	GOOD	GOOD
MEK	LITTLE EFFECT	DULLS GLOSS	DULLS GLOSS	NO EFFECT	DULLS GLOSS	DULLS GLOSS
Xylene	NO EFFECT	NO EFFECT	NO EFFECT	NO EFFECT	LITTLE EFFECT	NO EFFECT

AUTOMOTIVE FLUID RESISTANCE 16 HOUR IMMERSION

Gasohol	NO EFFECT	SWELLS	LITTLE EFFECT	NO EFFECT	LITTLE EFFECT	NO EFFECT
Brake Fluid	DULLS GLOSS	BLISTERS	BLISTERS	DULLS GLOSS	BLISTERS	DULLS GLOSS
Antifreeze	NO EFFECT	NO EFFECT	NO EFFECT	NO EFFECT	NO EFFECT	NO EFFECT
Motor Oil	NO EFFECT	SWELLS	NO EFFECT	NO EFFECT	NO EFFECT	NO EFFECT


GASKET PERFORMANCE CHARACTERISTICS

	FOR REFERENCE ONLY				
	SCE STANDARD STRIP GASKET URETHANE SPONGE RUBBER	SCE STANDARD POUR IN PLACE GASKET URETHANE SPONGE RUBBER	NEOPREN SPONGE RUBBER	SILICONE SPONGE RUBBER	VITON SPONGE RUBBER
	10 LBS / 15LBS	10 LBS / 15LBS	10 LBS / 15LBS	10 LBS / 15LBS	10 LBS / 15LBS
COLD FLEXABILITY	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT
STAIN RESISTANCE	GOOD	GOOD	POOR	EXCELLENT	GOOD
COMPRESSION SET	EXCELLENT	EXCELLENT	POOR	EXCELLENT	EXCELLENT
HEAT RESISTANCE 220°	GOOD	GOOD	POOR	EXCELLENT	EXCELLENT
UV RESISTANCE	EXCELLENT	EXCELLENT	GOOD	EXCELLENT	GOOD
CORROSION RESISTANCE	EXCELLENT	EXCELLENT	GOOD	EXCELLENT	EXCELLENT
WATER RESISTANCE	GOOD	GOOD	GOOD	EXCELLENT	EXCELLENT
FUNGAL RESISTANCE	GOOD	GOOD	POOR	GOOD	GOOD
SEA WATER	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT
CHLORINE WATER	EXCELLENT	EXCELLENT	GOOD	EXCELLENT	EXCELLENT
DARK CUTTING OIL	EXCELLENT	EXCELLENT	POOR	POOR	EXCELLENT
CUTTING FLUID	EXCELLENT	EXCELLENT	POOR	EXCELLENT	POOR
MEK	GOOD	GOOD	POOR	POOR	POOR
XYLENE	GOOD	GOOD	POOR	POOR	POOR
SURFURIC ACID	POOR	POOR	EXCELLENT	EXCELLENT	EXCELLENT
PHOSPHORIC ACID	POOR	POOR	EXCELLENT	EXCELLENT	EXCELLENT
CITRIC ACID	POOR	POOR	POOR	EXCELLENT	EXCELLENT



AUTOMOTIVE FLUID RESISTANCE

UNLEADED GASOLINE	EXCELLENT	EXCELLENT	POOR	POOR	POOR
BRAKE FLUID	GOOD	GOOD	POOR	POOR	EXCELLENT
ANTIFREEZE	GOOD	GOOD	GOOD	GOOD	GOOD
MOTOR OIL	EXCELLENT	EXCELLENT	POOR	POOR	EXCELLENT

SCE-3916, SCE-3916SS
LARGE CONCEALED HINGE

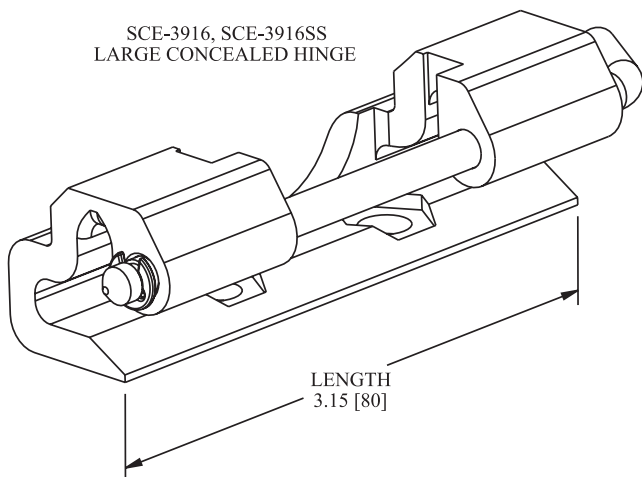

SCE-3918, SCE-3918SS
SMALL CONCEALED HINGE

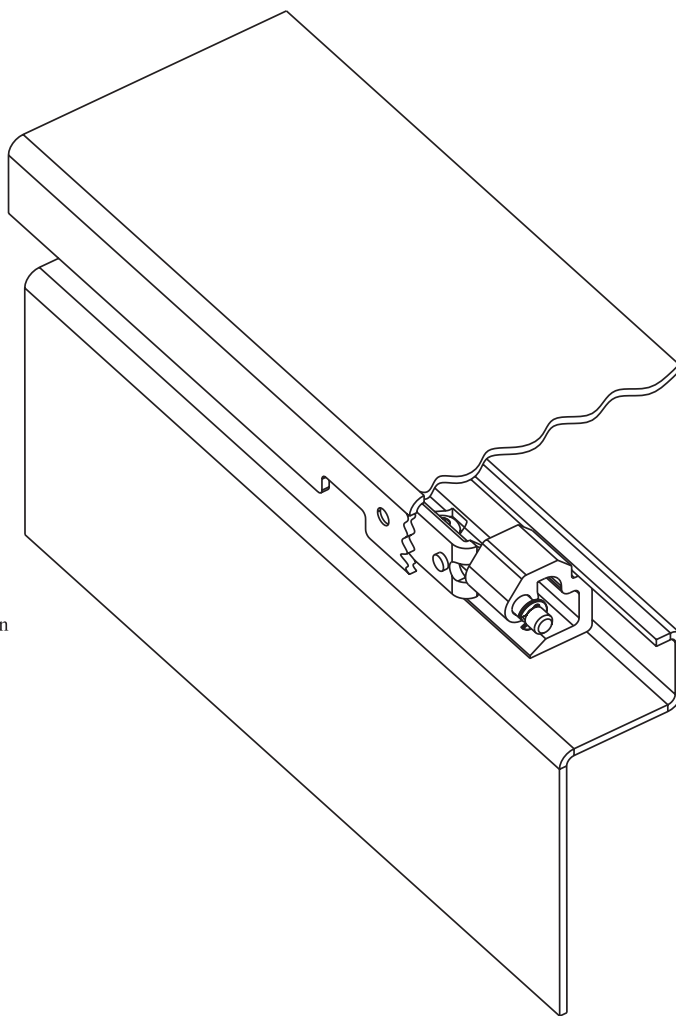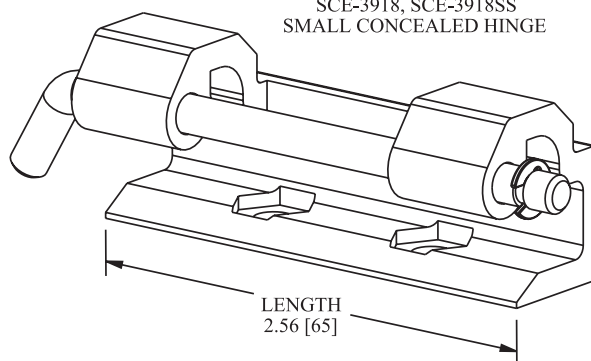

SCE Concealed Hinge

SCE Concealed Hinges are made of Zinc (Zamak #5) Stainless Steel.

Doors easily removed for field replacements or to make modifications and add your cutouts, without being concerned with hinge alignment.

Hinges are concealed for increased cosmetic appearance and makes the hinge pin tamper resistant.

Increased corrosion protection because the hinges are installed after the coating operation.

Hinge pins are Stainless Steel.

Doors open 180 degrees.

SCE-3916 Large Concealed Hinge.

SCE-3916SS Large Concealed Hinge Stainless Steel.

Maximum Recommended Weight Added to the door.

Two Hinge 100 lbs

Three Hinge 250 lbs

Four Hinge 350 lbs

SCE-3918 Small Concealed Hinge.

SCE-3918SS Small Concealed Hinge Stainless Steel.

Maximum Recommended Weight Added to the door.

Two Hinge 75 lbs

Three Hinge 175 lbs

Four Hinge 250 lbs

Note: It is always recommended that the weight is distributed equally through out the door or nearest the hinge side of the door with any type of hinge. Maximum recommended door width 40 in.

GENERAL PRODUCT INFORMATION

Ordering Information

Orders can be placed with Saginaw Control directly through the sales department at our factory or with an authorized sales representative. All items which must be added to the enclosure must be ordered separately. Prices printed in this catalog supersede all previously published lists. Prices are subject to change without notice, and any errors in this publication will be corrected on the succeeding price list. Prices do not include sub-panels unless the sub-panel has been specified as included with the enclosure.

Installation Instructions

For the convenience of our customers, SCE has an Installation Manual available at www.saginawcontrol.com. These instructions cover a wide range of topics from disconnect information to detailed drawings of parts.

Cooling and Air Conditioning

A variety of air conditioning and cooling options are available for stock and custom ordered enclosures. Please contact a sales representative to solve your air conditioning needs.

Application

Saginaw Control & Engineering products are designed primarily for industrial or commercial electrical applications. Utilization of the products shown in this catalog for this purpose should be done only by qualified electrical technicians or professional electricians. Design, selection, installation and use of SCE products must conform to all applicable local, state and federal laws, regulations and ordinances.

Shipping, Storage, Assembly and Mounting

Enclosures are designed and manufactured for permanent floor or wall mounting. Until securely mounted, many enclosures require stabilizing support. Care should be taken during storage, handling, and assembly to avoid severe impacts or shocks. Enclosures must be mounted securely to structures which can completely support the weight of the enclosure and components. SCE is not responsible for damage to enclosures due to improper packaging after installation of equipment and components.

Dimensions, Specifications and Weights

Dimensions, specifications and weights are intended as representations of the size, function, appearance and weight of our products. They are not intended to show details of construction, design, or to be used as engineering specifications. Shipping weights included in this catalog do not include the weight of the sub-panel or any other accessories unless specified as included with the enclosure. Because technical details of construction and design are subject to change without notice, we recommend that you consult Saginaw Control and Engineering for current technical data.

Environmental Protection and Finish

SCE enclosures, unless otherwise specified, are finished with either an epoxy polyester powder coat or a high solids recoatable finish over phosphatized surfaces. These finishes will provide ordinary protection against corrosion in average industrial indoor areas. Special materials and finishes are available for outdoor use or special environments, and must be specified at the time of the order.

Additions, Alterations, Connections and Wiring

SCE enclosures are designed to meet the specifications as described in this catalog. The safety or effectiveness of any additions or alterations cannot be assured if they are not made in the plant. Accessory items are designed to function with SCE enclosures. Accessories are for use only as described in this catalog. Before any circuits are energized, all internal and external electrical and mechanical clearances must be checked to assure proper functioning. Due to the variety of installed equipment, applications, and location, SCE cannot anticipate all possible interferences. Designers, assemblers and installers must consult with equipment manufacturers and observe all safe practices and procedures.

Phone (989) 799-6871
Fax (989) 799-4524



GENERAL PRODUCT INFORMATION

Materials

Saginaw Control & Engineering is using laser technology in production of our enclosures. This technology requires that the steel used meet exacting specifications. In order to reflect this change, we have changed our material specifications for the enclosures. The use of actual dimensions is more accurate than stating an enclosure is made of a certain gauge of steel. For example, we list our Pushbutton enclosures as being made of 0.075" carbon steel. Previously, this would have been listed as a 14 gauge steel. 14 gauge steel can range from .0677" to .0817" thick. Therefore, by specifying the thickness, SCE can produce a more consistent product.

carbon steel – For interior or exterior applications. This steel must have a corrosion resistant finish applied.

Type 304 Stainless – For interior or exterior applications, especially dairies, breweries, food processing areas, or areas that are wet or regularly hosed down. No additional finish is necessary.

Type 316/316L Stainless – For interior or exterior applications, especially marine environments with increased exposure to salt, or areas with extremely high temperatures. No additional finish is necessary. Most SCE enclosures can be custom built from Type 316/316L material.

Fiberglass – For interior or exterior applications, especially for exposure to salt, corrosive agents, chemicals, or extremely wet areas. No additional finish is necessary.

Design Support

Saginaw Control has a skilled, experienced design team ready to help you design your enclosure to fit your specific requirements. Simply fax your sketch and/or specifications, and our staff will design your enclosure, console, or precision sheet metal fabrication. If you prefer, you can send your own drawings to SCE via electronic mail or fax and let SCE handle the rest.

For your convenience, CAD drawings of stock SCE enclosures are now available from our Internet web site. Simply move the CAD drawings of a stock enclosure to your system, make the desired modifications, and send it to SCE!

Finishes

Finish Types include both high solids and powder coat finishes.

Epoxy Polyester Powder – Suitable for interior or exterior applications. Offers superior corrosion resistance, chemical resistance, weather protection, and resistance to scrapes and scratches.

Textured Polyester Powder – A powder finish with an irregular surface. Suitable for interior or exterior applications. Offers superior corrosion resistance, chemical resistance, weather protection, and resistance to scrapes and scratches.

High Solids Finish – Suitable for interior or exterior applications. Corrosion resistant, solvent resistant, solvent free formula, mar and chip resistant.

Recoating – All SCE stock enclosures can be easily recoated. To ensure good adhesion, sand all surfaces with 360 or 400 grit sandpaper. Wet wipe all surfaces with Aliphatic Solvent or detergent wash. (Always follow instructions provided by your paint manufacturer). Surface must be dry and free of oil, dust, dirt or any other foreign substances before recoating. To avoid discoloration of Alkyd finishes, do not bake over 250°F.

Compatible paints are:

1. All Industrial Enamel
2. Acrylic Enamel
3. Epoxy

For any other type of paint, check with your paint manufacturer to be sure that the paint you are applying is compatible with the paint on your SCE product.

Custom Orders

Contact your local Sales Representative or a factory representative. They will assist you in quoting price and delivery for your needs.

Your purchase order should include:

- Quantity
- Size (Height x Width x Depth)
- Sub-panel Size (Height x Width)
- Sub-panel Location
- Finish Specifications
- Lead Time / Delivery Deadline
- Material
- Special Instructions
- Drawing Numbers (If Applicable)

NOTES

NOTES

PRODUCT NAME INDEX

PRODUCT NAME	PAGE NO.	PRODUCT NAME	PAGE NO.
A			
Accessories, Free-Standing	116-123	Disconnect Enclosures, Enviroline Two-Door	134
Accessories, Industrial Modular System (IMS)	162-172	Disconnect Enclosures, Heavy Duty	136-143
Accessories, Modular Enclosures	149	Disconnect Enclosures, Heavy Duty Stainless Steel	256-261
Accessories, Work Station	28-35	Disconnect Enclosures, Single Door with SCE Hardware	84
Accessories, Work Station Stainless Steel	186-193	Disconnect Enclosures, Vented Type 3R	88
Air Conditioners, Side Mount	280-281	Disconnect Two-Door Enviroline Sloping Top S.S. Encl.	254
Air Conditioners, Top Mount	282	Disconnect Two-Door Enviroline Stainless Steel Encl.	252
Aluminum Sub-panels	312	Disk Pocket	320
Angle Iron Mounting Feet	304	Door Gasket	326
Anti-Condensation Heater	289	Door Hardware	290-293
B		Door Stop Kit	296
Barrier Plates for XM Enclosures	319	Drain Vent	283
Bases	299	Drip Shield Kit Assembly	298
Blower Package	286	Dual Access, Single Door Free-Standing Enclosures	112
Bolt Packs	329	Dual Access, Two-Door Free-Standing Enclosures	114
Breather Vent	283	E	
C		EL Flush Mount Frames	307
Cable Door Stops	10	Electrical Interlock	302
Captive Screws	328	Electrical Interlock Defeater	302
Caster Kit	304	ELJ Console, Stainless Steel	178
CD Pocket	320	ELJ Consoles	10
Channel Nuts	327	EMI Gasket	326
Clamp Cover Enclosures, Fiberglass	274	Enviroline Free-Standing Single Door Encl. S.S.	246
Clamp Fastened Single Door Disconnect Encl., Stainless Steel	236	Enviroline Free-Standing Two-Door Encl. S.S.	248
Clamp Fastened Single Door Disconnect Enclosures	86	Enviroline Junction Enclosure Sub-panels	315
Clamp Fastened Single Door Encl., Stainless Steel	224-227	Enviroline Junction Enclosures w/ Viewing Window	60
Clamp Fastened Single Door Enclosures	74-77	Enviroline Junction Enclosures, Stainless Steel	206
Clamping Nuts	327	Enviroline Junction Enclosures, w/Viewing Window S.S.	208
Clamps	293	Enviroline Junction Trough Encl. w/Viewing Window	64
Columns	299	Enviroline Junction Trough Encl. w/Viewing Window S.S.	212
Conductive Tape	326	Enviroline Junction Trough Enclosures	62
Consoles, Desk	18-21	Enviroline Junction Trough Enclosures, Stainless Steel	210
Consoles, Series 14	14-17	Enviroline Junction Enclosures	58
Consoles, Series 9	12	Enviroline Single Door Disconnect Enclosures	82
Consolets, ELJ	10	Enviroline Single Door Disconnect Encl., Stainless Steel	230-233
Consolets, ELJ Stainless Steel	178	Enviroline Single Door Enclosures	70-73
Continuous Hinge Junction Enclosures	66	Enviroline Single Door Enclosures, Stainless Steel	218-221
Continuous Hinge Junction Enclosures, Stainless Steel	214	Enviroline Single Door, 3-point hardware. Stainless Steel	216
Convenience Receptacles	294-295	Enviroline Sloping Top Single Door Encl. Stainless Steel	222
Cooling Fan	288	Enviroline Sloping Top Two-Door Encl. Stainless Steel	244
CSE Program	4-7	Enviroline Sloping Top Wall-Mount Disconnect Encl. S.S.	234
D		Enviroline Trough Enclosures	62
Dead Front Panels	316-317	Enviroline Trough Enclosures w/ Viewing Window	64
Desk Consoles	18-21	Enviroline Trough Junction Enclosure Sub-panels	315
Desktop Work Station	24	Enviroline Two-Door Disconnect Enclosures	134
Desktop Work Station Stainless Steel	182	Enviroline Two-Door Disconnect Encl., Stainless Steel	252
Disconnect Adapter	302	Enviroline Two-Door Enclosures, Floor Mounted	104
Disconnect Cover Plate	302	Enviroline Two-Door Encl., Floor Mounted Stainless Steel	242
Disconnect Encl., Enviroline Sloping Top Single Door S.S.	234	Enviroline Two-Door Encl., Wall Mount Stainless Steel	228
Disconnect Enclosures, Clamp Fastened Single Door	86	Enviroline Two-Door Enclosures, Wall Mount	78
Disconnect Enclosures, Clamp Fastened Single Door S.S.	236	Exterior Print Pocket	320
Disconnect Enclosures, Enviroline Single Door	82	External Disconnect Enclosure	324
Disconnect Enclosures, Enviroline Single Door	82	Eyebolts	304
Disconnect Enclosures, Enviroline Single Door S.S.	230-233		

Phone (989) 799-6871

Fax (989) 799-4524



PRODUCT NAME	PAGE NO.
--------------	----------

F

Fan & Grille Kit	285
Fan, Cooling	288
Fan/Filter Package, Type 12	285
Fan/Heater with Thermostat	289
Fiberglass Clamp Cover Enclosures	274
Fiberglass Junction Enclosures	270
Fiberglass Junction Enclosures w/ Viewing window	272
Fiberglass Pushbutton Enclosures	266
Fiberglass Screw Cover Enclosures	268
Filler Plates	312
Filter Assembly	284
Filter, Replacement	329
Floor Mounted, Enviroline Two-Door Enclosures	104
Floor Mounted, Enviroline Two-Door Encl. Stainless Steel	242
Floor Mounted, Overlapping Two-Door Enclosures	106
Floor Stand Kit	306
Flush Mount Frame for Enviroline Wall Mount Enclosures	307
Folding Shelf	299
Free-Standing Enclosure Accessories	116-123
Free-Standing Single Door, Dual Access Enclosures	112
Free-Standing Single Door, Single Access Enclosures	108
Free-Standing Two-Door, Dual Access Enclosures	114
Free-Standing Two-Door, Single Access Enclosures	110
Free-Standing, Enviroline Stainless Steel Single Door	246
Free-Standing, Enviroline Stainless Steel Two-Door	248
Free-Standing, Heavy Duty Disconnect Enclosures	136-143
Free-Standing, Heavy Duty Stainless Disconnect Enclosures	256-261

G

Galvanized Sub-panels	310
Gasket	326
General Purpose Type 1 Enclosures	96
General Purpose Type 1 Enclosures with Knockouts	98
Grounding Bars	296
Grounding Straps	296

H

Heat Exchanger	282
Heavy Duty Free-Standing Enclosures	136-143
Heavy Duty Free-Standing Stainless Disconnect Enclosures	256-261
Hinge	328
Hinged Access Enclosure	322
Hinged Cover 3R Enclosures	92
Hinged Window Enclosure	322
Hole Plugs	301

I

Individual Panel Supports	313
Industrial Modular System (IMS) Accessories	162-172
Industrial Modular System (IMS) Enclosures	154-161
Internal Disconnect Enclosure	323

J

Junction Enclosures, Continuous Hinge	66
Junction Enclosures, Continuous Hinge Stainless Steel	214
Junction Enclosures, Enviroline	58
Junction Enclosures, Enviroline Stainless Steel	206

PRODUCT NAME	PAGE NO.
--------------	----------

Junction Enclosures, Enviroline w/ Viewing Window	60
Junction Enclosures, Enviroline w/ Viewing Window S.S.	208
Junction Enclosures, Fiberglass	270
Junction Enclosures, Fiberglass with Viewing Window	272

K

Keyboard Drawer, Pull-Out	297
Keyboard Kit	297
Keys	328

L

Latches, Mini Quarter Turn	291
Latches, Quarter Turn	290
LED Light Kit	300
Leveling Pads	304
Lifting Lugs	304
Light Kit	300
Light Switch Assembly	301
Light Switch Mounting Bracket	300
Louver & Filter Kit	284

M

Mechanical Defeater	326
Mechanical Hygrostat	283
Mechanical Interlock	302
Mini Quarter Turn Latches	291
Modular Enclosure Accessories	149
Modular Enclosures	148
Monitor Mounting Bracket	30
Mounting Feet, Angle Iron	304
Mounting Foot Kit for ELJ Enviroline Enclosures	305
Mounting Foot Kit for Enviroline Enclosures	305
Mounting Foot Kit Type 3R	305
Mounting Strap Type 1	303
Mounting Strap Type 3R	303
Multi Door Free-Standing / Wall-Mount Disconnect Enclosures	128-133
Multi Door Free-Standing Enclosures	124

N**O**

Overlapping Two-Door Floor Mounted Enclosures	106
Overlapping Two-Door Wall Mount Enclosures	80

P

Padlock Kit for Junction Boxes	293
Pedestal Mount Work Station	24
Pedestal Mount Work Station, Stainless Steel	182
Perforated Sub-panels, Type 1	314
Print Pocket	320
Program Ports	294-295
Protective Access Enclosures	322-324
Pull Handle	293
Pull Out Keyboard Drawer	297
Pushbutton Enclosures	40-53
Pushbutton Enclosures, Fiberglass	266
Pushbutton Enclosures, Sloping Front	54-57
Pushbutton Enclosures, Stainless Steel	198-205

Q

Quarter Turn Latches	290
----------------------	-----

PRODUCT NAME	PAGE NO.
R	
Rain Hood	287
Removable Wire Cover	296
S	
Screw Cover 3R Enclosures	94
Screw Cover Enclosures	68
Screw Cover Enclosures, Fiberglass	268
Sealing Washers	327
Series 14 Consoles	14-17
Series 9 Consoles	12
Shelf, Folding	299
Side Mount Air Conditioners	280
Single Access, Single Door Free-Standing Enclosures	108
Single Access, Two-Door Free-Standing Enclosures	110
Single Door Disconnect Enclosures with SCE Hardware	84
Single Door Disconnect Enclosures, Clamp Fastened	86
Single Door Enclosures, Clamp Fastened	74-77
Single Door Enviroline Disconnect Enclosures	82
Single Door Enviroline Enclosures	70-73
Single Door Type 1 Enclosures	96
Single Door Type 1 Enclosures with Knockouts	98
Slope Top Work Station	26
Slope Top Work Station, Stainless Steel	184
Sloping Front Pushbutton Enclosures	54-57
Sloping Top Two-Door S.S. Disconnect Enviroline Encl.	254
Sloping Top Two-Door Stainless Steel Enviroline Encl.	244
Stainless Steel Clamp Fastened Single Door Encl.	224-227
Stainless Steel Continuous Hinge Junction Enclosures	214
Stainless Steel Desktop Work Station	182
Stainless Steel Disconnect Clamp Fastened Single Door	236
Stainless Steel Disconnect Enviroline Single Door Encl.	230-233
Stainless Steel Disconnect Enviroline Sloping Top Single Door	234
Stainless Steel Disconnect Enviroline Sloping Top Two-Door	254
Stainless Steel Disconnect Enviroline Two-Door Enclosure.	252
Stainless Steel ELJ Consolelets	178
Stainless Steel Enviroline Free-Standing Single Door Encl.	246
Stainless Steel Enviroline Free-Standing Two-Door Encl.	248
Stainless Steel Enviroline Junction Encl. w/ Viewing Window	208
Stainless Steel Enviroline Junction Enclosures	206
Stainless Steel Enviroline Junction Trough Encl. w/Viewing Window	212
Stainless Steel Enviroline Junction Trough Enclosures	210
Stainless Steel Enviroline Single Door Enclosures	218-221
Stainless Steel Enviroline Single Door w/ 3-point hardware	216
Stainless Steel Enviroline Sloping Top Single Door Encl.	222
Stainless Steel Enviroline Sloping Top Two-Door Encl.	244
Stainless Steel Enviroline Two-Door Disconnect Encl.	252
Stainless Steel Enviroline Two-Door Encl. Floor Mounted	242
Stainless Steel Enviroline Two-Door Encl. Wall Mount	228
Stainless Steel Heavy Duty Free-Standing Disconnect Encl.	256-261
Stainless Steel L-Handle	292
Stainless Steel Pedestal Mounted Work Station	182
Stainless Steel Pushbutton Enclosures	198-205
Stainless Steel Slope Top Work Station	184
Stainless Steel Work Station	180
Stainless Steel Work Station Accessories	186-193
Sub-panels, Aluminum	312
Sub-panels, Enviroline Junction Enclosures	315
Sub-panels, Enviroline Trough Junction Enclosures	315
Sub-panels, Galvanized	310
Sub-panels, Steel	308

PRODUCT NAME	PAGE NO.
Sub-panels, Type 1	313
Sub-panels, Type 1 Perforated	314
Swing Panel Assembly for Enviroline Enclosures	318
Swing Panel Assembly for LP Enclosures	318

T	
Table of Contents	3
Technical Information	332-343
Terms and Conditions of Sale	2
Thermostat	283
Three Point Door Rod Kit	292
Top Mount Air Conditioners	282
Touch Up Paint	328
Trough Enclosures, Enviroline	62
Trough Enclosures, Enviroline Stainless Steel	210
Trough Enclosures, Enviroline w/ Viewing Window	64
Trough Enclosures, Enviroline w/ Viewing Window S.S.	212
Two-Door Enviroline Floor Mounted Enclosures	104
Two-Door Enviroline Wall Mount Enclosure	78
Type 1 Perforated Sub-panels	314
Type 1 Sub-panels	313
Type 12 Fan / Filter Package	286
Type 3R Enclosures, Hinged Cover	92
Type 3R Enclosures, Screw Cover	94
Type 3R Enclosures, Vented	90
Type 3R Enclosures, Vented Disconnect	88

U**V**

Vent, Breather	283
Vent, Drain	283
Vented Type 3R Disconnect Enclosures	88
Vented Type 3R Enclosures	90

W

Wall Mount Enclosures, Overlapping Two-Door	80
Window Kit, Type 4	321
Wire Cover, Removable	296
Work Station	22
Work Station Accessories	28-35
Work Station Accessories, Stainless Steel	186-193
Work Station, Desktop	24
Work Station, Desktop Stainless Steel	182
Work Station, Pedestal Mount	24
Work Station, Pedestal Mount Stainless Steel	182
Work Station, Slope Top	26
Work Station, Slope Top Stainless Steel	184
Work Station, Stainless Steel	180

X

XM Barrier Plates	319
-------------------	-----

Y**Z**

Phone (989) 799-6871
Fax (989) 799-4524



NUMERICAL INDEX

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE
G28-0416-G050	P1	114	*	281	SCE-10086CHNF	A1	10	79.24	66
G28-0426-G050	P1	125	*	281	SCE-10086CHNFSS	S1	11	364.04	214
G28-0446-G050	P1	84	*	281	SCE-10086CHNFSS6	S7	11	425.88	214
G28-0616-G050	P1	139	*	281	SCE-10086ELJ	E1	7	79.12	58
G28-0626-G050	P1	138	*	281	SCE-10086ELJSS	S6	8	290.44	206
G28-0646-G050	P1	155	*	281	SCE-10086ELJSS6	S7	8	348.53	206
G52-0816-G050	P1	168	*	281	SCE-10086ELJW	E1	8	126.12	60
G52-0826-G050	P1	200	*	281	SCE-10086ELJWSS	S6	9	378.97	208
G52-0846-G050	P1	185	*	281	SCE-10086ELJWSS6	S7	8	454.77	208
G52-1216-G050	P1	163	*	281	SCE-10086FG	F1	5	*	268
G52-1226-G050	P1	186	*	281	SCE-10086FW	F1	5	*	272
G52-1246-G050	P1	205	*	281	SCE-10086SC	A1	10	73.99	68
M28-0216-G013	P1	137	*	281	SCE-1008CHNF	A1	9	69.39	66
M28-0226-G004	P1	141	*	281	SCE-1008CHNFSS	S1	9	332.84	214
MHB11-0216-G306	P1	94	*	282	SCE-1008CHNFSS6	S7	9	389.42	214
MHB11-0226-G306	P1	115	*	282	SCE-1008CHSNF	A1	9	73.30	66
MHB11-0416-G307	P1	108	*	282	SCE-1008ELJ	E1	6	70.76	58
MHB11-0426-G306	P1	141	*	282	SCE-1008ELJSS	S6	6	260.94	206
N17-0116-G010	P1	50	*	280	SCE-1008ELJSS6	S7	7	313.13	206
N17-0126-G010	P1	50	*	280	SCE-1008ELJW	E1	6	119.76	60
N17-0216-G010	P1	54	*	280	SCE-1008ELJWSS	S6	7	359.33	208
N17-0226-G010	P1	54	*	280	SCE-1008ELJWSS6	S7	7	431.20	208
N28-0416-G050	P1	120	*	280	SCE-1008FG	F1	5	*	268
N28-0426-G050	P1	113	*	280	SCE-1008FW	F1	5	*	272
N36-0616-G050	P1	145	*	280	SCE-1008SC	A1	9	65.22	68
N36-0626-G050	P1	100	*	280	SCE-100AFSD	P2	17	135.70	323
N36-0646-G050	P1	130	*	280	SCE-10106CHNF	A1	12	80.55	66
N36-0816-G050	P1	106	*	280	SCE-10106ELJ	E1	9	83.56	58
N36-0826-G050	P1	106	*	280	SCE-10106SC	A1	11	81.51	68
N36-0846-G050	P1	165	*	280	SCE-1010SC	A1	10	72.73	68
N43-1216-G050	P1	127	*	280	SCE-101670	P2	1	10.57	328
N43-1226-G050	P1	127	*	280	SCE-101695	P2	1	11.50	328
N43-1246-G050	P1	138	*	280	SCE-101697	P2	1	11.50	328
P-B15-F3R3-U450	P4	1	*	294	SCE-101966	P2	1	2.50	329
P-B15-K3RF3-U450	P4	1	*	295	SCE-101974	P2	1	5.00	329
P-B15-K4RF3-U450	P4	1	*	295	SCE-102022	P2	1	36.82	329
P-D4-H3R3-U450	P4	1	*	294	SCE-102297	P2	1	2.50	329
P-D4-M3RF3-U450	P4	1	*	295	SCE-102300	P2	1	8.61	329
P-D4-M4RF3-U450	P4	1	*	295	SCE-102534	P2	1	19.03	328
P-Q7-F3R3-U450	P4	1	*	294	SCE-102686	P2	1	4.98	329
P-Q7-K3RF3-U450	P4	1	*	295	SCE-102804	P2	1	24.00	290
P-Q7-K4RF3-U450	P4	1	*	295	SCE-103370	P2	3	57.80	292
P-Q9-F3R3-U450	P4	1	*	294	SCE-103736	P2	1	63.20	329
P-Q9-K3RF3-U450	P4	1	*	295	SCE-104941	P2	2	143.31	302
P-Q9-K4RF3-U450	P4	1	*	295	SCE-105419	P2	1	2.04	291
P-R2-F3R3-U450	P4	1	*	294	SCE-105604	P2	2	143.31	302
P-R2-K3RF3-U450	P4	1	*	295	SCE-107930	P2	1	11.50	328
P-R2-K4RF3-U450	P4	1	*	295	SCE-108401	P2	1	117.05	329
SCE-100814	P2	1	24.00	290	SCE-10N10MP	N1	1	5.27	313
SCE-10085CHQRFG	F1	5	*	270	SCE-10N10MPP	N1	1	13.47	314
					SCE-10N8MP	N1	2	4.46	313
					SCE-10N8MPP	N1	1	11.58	314
					SCE-10P10	P3	2	6.73	308

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-10P10GALV	P3	2	6.73	310
SCE-10P10J	P3	4	6.73	315
SCE-10P8	P3	1	5.70	308
SCE-10P8AL	F2	2	*	312
SCE-10P8GALV	P3	1	5.70	310
SCE-10P8J	P3	2	5.70	315
SCE-10PBA	A1	11	158.02	54
SCE-10PBAI	A1	11	158.02	56
SCE-10PBX	A1	11	117.88	44
SCE-10PBXI	A1	11	117.88	46
SCE-110047	P2	1	11.50	328
SCE-110551	P2	1	44.52	288
SCE-111252	P2	1	24.31	288
SCE-112399	P2	1	20.52	288
SCE-112984	P2	1	1.73	291
SCE-113188	P2	1	91.80	329
SCE-113947	P2	1	65.57	329
SCE-115259	P2	2	34.43	317
SCE-12064CHNF	A1	8	63.66	66
SCE-121010SC	A1	17	125.41	68
SCE-12105CHQRFG	F1	6	*	270
SCE-12106CHNF	A1	14	91.96	66
SCE-12106CHNFSS	S1	14	411.42	214
SCE-12106CHNFSS6	S7	14	457.71	214
SCE-12108CHNF	A1	15	98.74	66
SCE-12108CHNFSS	S1	16	438.43	214
SCE-12108CHNFSS6	S7	16	526.12	214
SCE-12108ELJ	E1	11	98.72	58
SCE-12108ELJSS	S6	11	352.80	206
SCE-12108ELJSS6	S7	12	423.36	206
SCE-12108ELJW	E1	11	150.72	60
SCE-12108ELJWSS	S6	11	432.12	208
SCE-12108ELJWSS6	S7	12	518.54	208
SCE-1210CHNF	A1	13	87.29	66
SCE-1210CHSNF	A1	13	89.33	66
SCE-1210ELJ	E1	10	86.48	58
SCE-1210ELJSS	S6	10	328.93	206
SCE-1210ELJSS6	S7	10	394.72	206
SCE-1210ELJW	E1	10	138.48	60
SCE-1210ELJWSS	S6	10	418.25	208
SCE-1210ELJWSS6	S7	10	501.91	208
SCE-1210FG	F1	6	*	268
SCE-1210FW	F1	7	*	272
SCE-1210SC	A1	12	82.76	68
SCE-1212CHNF	A1	15	101.32	66
SCE-1212CHNFSS	S1	15	440.78	214
SCE-1212CHNFSS6	S7	16	504.94	214
SCE-1212CHQRFG	F1	7	*	270
SCE-1212ELJ	E1	11	100.96	58
SCE-1212ELJSS	S6	11	355.50	206
SCE-1212ELJSS6	S7	11	426.60	206
SCE-1212FG	F1	8	*	268
SCE-1212FW	F1	7	*	272
SCE-1212SC	A1	15	96.56	68
SCE-12C12ELJ	A1	14	132.93	10
SCE-12C12ELJSS	S1	14	771.99	178

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-12C16ELJ	A1	17	147.97	10
SCE-12C16ELJSS	S1	14	796.98	178
SCE-12C20ELJ	A1	21	163.03	10
SCE-12C20ELJSS	S1	20	817.75	178
SCE-12C24ELJ	A1	24	175.57	10
SCE-12C24ELJSS	S1	22	888.79	178
SCE-12DLP12	P3	3	13.67	308
SCE-12DLP12GALV	P3	4	13.67	310
SCE-12EL1206LP	E3	16	183.29	70
SCE-12EL1206SS6LP	S7	17	643.39	220
SCE-12EL1206SSLP	S5	16	536.16	218
SCE-12EL2406LP	E3	26	218.97	70
SCE-12EL2406SS6LP	S7	24	855.14	220
SCE-12EL2406SSLP	S5	27	712.62	218
SCE-12H2406LP	A3	28	238.27	74
SCE-12H2408LP	A3	28	253.33	74
SCE-12N10MP	N1	3	6.03	313
SCE-12N10MPP	N1	1	15.11	314
SCE-12N12MP	N1	4	7.10	313
SCE-12N12MPP	N1	2	15.94	314
SCE-12P10	P3	2	7.72	308
SCE-12P10AL	F2	2	*	312
SCE-12P10GALV	P3	3	7.72	310
SCE-12P10J	P3	2	7.72	315
SCE-12P12	P3	3	9.08	308
SCE-12P12AL	F2	2	*	312
SCE-12P12C	P3	2	13.28	10
SCE-12P12GALV	P3	4	9.08	310
SCE-12P12J	P3	3	9.08	315
SCE-12P16C	P3	3	18.22	10
SCE-12P20C	P3	4	23.16	10
SCE-12P24	P3	8	27.86	308
SCE-12P24C	P3	5	28.09	10
SCE-12P24GALV	P3	8	27.86	310
SCE-12P6	P3	1	5.35	308
SCE-12P6GALV	P3	2	5.35	310
SCE-12PB	A1	8	104.08	40
SCE-12PBA	A1	13	171.82	54
SCE-12PBAI	A1	13	171.82	56
SCE-12PBGX	A1	8	106.60	48
SCE-12PBH	A1	16	162.14	50
SCE-12PBHI	A1	17	162.14	52
SCE-12PBI	A1	9	104.08	42
SCE-12PBSS	S1	8	351.56	198
SCE-12PBSSI	S1	8	351.56	200
SCE-12PBX	A1	11	124.15	44
SCE-12PBXI	A1	11	124.15	46
SCE-12SPBA	A1	12	164.28	54
SCE-12SPBAI	A1	12	164.28	56
SCE-13ELJEXPP	P2	12	152.23	320
SCE-1407FG	F1	5	*	268
SCE-1407FW	F1	5	*	272
SCE-14086CHNF	A1	13	87.06	66
SCE-14087CHQRFG	F1	6	*	270

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-14127CHQRF	F1	10	*	270	SCE-16147CHQRF	F1	11	*	270
SCE-14128CHNF	A1	19	119.01	66	SCE-16148CHNF	A1	23	143.66	66
SCE-14128ELJ	E1	14	118.44	58	SCE-16148ELJ	E1	18	143.42	58
SCE-14128ELJSS	S6	15	400.92	206	SCE-16148ELJSS	S6	18	508.38	206
SCE-14128ELJSS6	S7	15	481.10	206	SCE-16148ELJSS6	S7	18	610.06	206
SCE-1412CHNF	A1	17	112.50	66	SCE-16148ELJW	E1	18	204.42	60
SCE-1412CHNFSS	S1	17	465.15	214	SCE-16148ELJWSS	S6	18	597.34	208
SCE-1412CHNFSS6	S7	17	552.19	214	SCE-16148ELJWSS6	S7	18	716.81	208
SCE-1412CHSNF	A1	17	118.13	66	SCE-1614CHNF	A1	20	131.71	66
SCE-1412ELJ	E1	13	111.20	58	SCE-1614CHNFSS	S1	21	548.38	214
SCE-1412ELJSS	S6	13	378.21	206	SCE-1614CHNFSS6	S7	20	658.05	214
SCE-1412ELJSS6	S7	13	453.85	206	SCE-1614CHSNF	A1	20	138.30	66
SCE-1412FG	F1	9	*	268	SCE-1614ELJ	E1	16	130.82	58
SCE-1412FW	F1	9	*	272	SCE-1614ELJSS	S6	16	444.87	206
SCE-1412SC	A1	16	105.34	68	SCE-1614ELJSS6	S7	16	533.84	206
SCE-1436B	C1	323	2,078.69	14	SCE-1614ELJW	E1	16	193.82	60
SCE-1436P1	P2	37	209.78	14	SCE-1614ELJWSS	S6	16	563.84	208
SCE-1436P2	P3	24	177.24	14	SCE-1614ELJWSS6	S7	16	676.60	208
SCE-1436P3	P3	45	273.44	14	SCE-1614FG	F1	12	*	268
SCE-1436T	C1	97	562.08	14	SCE-1614FW	F1	12	*	272
SCE-1436W	P2	13	173.62	14	SCE-1614SC	A1	17	122.89	68
SCE-1448BD	C1	405	2,673.68	16	SCE-16C16ELJ	A1	23	173.05	10
SCE-1448P2	P3	38	212.67	16	SCE-16C16ELJSS	S1	24	817.75	178
SCE-1448P3	P3	64	336.74	16	SCE-16C20ELJ	A1	25	190.63	10
SCE-1448T	C1	126	670.95	16	SCE-16C20ELJSS	S1	28	888.79	178
SCE-1448W	P2	14	214.61	16	SCE-16C24ELJ	A1	30	208.17	10
SCE-1460BD	C1	462	2,767.36	16	SCE-16C24ELJSS	S1	32	957.18	178
SCE-1460P2	P3	44	245.59	16	SCE-16C30ELJ	A1	53	238.27	10
SCE-1460P3	P3	80	402.57	16	SCE-16DLP14	P3	4	17.72	308
SCE-1460T	C1	150	777.29	16	SCE-16DLP14GALV	P3	5	17.72	310
SCE-1460W	C2	21	253.19	16	SCE-16EL1206LP	E3	20	194.36	70
SCE-1472BD	C1	581	3,030.68	16	SCE-16EL1206SS6LP	S7	17	708.54	220
SCE-1472P3	P3	97	465.86	16	SCE-16EL1206SSLP	S5	17	590.45	218
SCE-1472T	C1	182	886.17	16	SCE-16EL1208LP	E3	21	205.44	70
SCE-1472W	P2	23	291.78	16	SCE-16EL1208SS6LP	S7	26	757.41	220
SCE-14B	C1	255	1,777.39	14	SCE-16EL1208SSLP	S5	26	631.18	218
SCE-14N12MP	N1	3	7.92	313	SCE-16EL1208SSST	S8	18	883.65	222
SCE-14N12MPP	N1	2	17.14	314	SCE-16EL1408LP	E3	25	211.59	70
SCE-14P1	P2	31	168.79	14	SCE-16EL1606LP	E3	24	210.37	70
SCE-14P12	P3	3	10.13	308	SCE-16EL1606SS6LP	S7	21	785.11	220
SCE-14P12AL	F2	2	*	312	SCE-16EL1606SSLP	S5	21	654.26	218
SCE-14P12GALV	P3	5	10.13	310	SCE-16EL1608LP	E3	27	234.97	70
SCE-14P12J	P3	3	10.13	315	SCE-16EL1608SS6LP	S7	28	825.83	220
SCE-14P2	P3	15	144.32	14	SCE-16EL1608SSLP	S5	28	688.19	218
SCE-14P3	P3	27	207.61	14	SCE-16EL1608SSST	S8	22	963.47	222
SCE-14P8	P3	2	7.39	308	SCE-16EL2006LP	E3	28	236.19	70
SCE-14P8AL	F2	2	*	312	SCE-16EL2008LP	E3	31	237.42	70
SCE-14P8GALV	P3	4	7.39	310	SCE-16EL2008SS6LP	S7	29	925.17	220
SCE-14R	P2	8	149.50	14	SCE-16EL2008SSLP	S5	30	770.98	218
SCE-14RMW	P2	16	198.69	296	SCE-16H1009QFGLP	F1	10	*	274
SCE-14T	C1	72	453.21	14	SCE-16H1206LP	A3	21	213.19	74
SCE-14W	P2	9	135.04	14	SCE-16H1206SS6LP	S7	23	752.53	226
SCE-16106CHNF	A1	17	102.65	66	SCE-16H1206SSLP	S3	23	627.11	224
SCE-161410CHNF	A1	26	150.70	66	SCE-16H1208LP	A3	22	223.22	74
					SCE-16H1208SS6LP	S7	24	806.28	226
					SCE-16H1208SSLP	S3	24	671.90	224

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-16H1210LP	A3	26	233.25	74
SCE-16H1606LP	A3	27	228.25	74
SCE-16H1606SS6LP	S7	26	835.59	226
SCE-16H1606SSLP	S3	26	696.32	224
SCE-16H1608LP	A3	27	240.78	74
SCE-16H2006LP	A3	30	245.80	74
SCE-16H2006SS6LP	S7	30	918.65	226
SCE-16H2006SSLP	S3	30	765.54	224
SCE-16H2008LP	A3	33	258.34	74
SCE-16N12MP	N1	3	11.58	313
SCE-16N12MPP	N1	2	19.25	314
SCE-16N16MP	N1	4	19.21	313
SCE-16N16MPP	N1	2	22.58	314
SCE-16P10	P3	3	9.90	308
SCE-16P10AL	F2	2	*	312
SCE-16P10GALV	P3	5	9.90	310
SCE-16P12	P3	4	14.81	308
SCE-16P12GALV	P3	6	14.81	310
SCE-16P14	P3	4	19.95	308
SCE-16P14AL	F2	2	*	312
SCE-16P14GALV	P3	6	19.95	310
SCE-16P14J	P3	4	19.96	315
SCE-16P16	P3	6	24.57	308
SCE-16P16GALV	P3	6	24.57	310
SCE-16P20C	P3	5	31.40	10
SCE-16P24C	P3	6	38.10	10
SCE-16P30C	P3	8	44.80	10
SCE-16PB12	P3	5	13.84	50
SCE-16PBA	A1	13	183.10	54
SCE-16PBAI	A1	13	183.10	56
SCE-16PBGX	A1	9	142.96	48
SCE-16PBH	A1	19	184.70	50
SCE-16PBHI	A1	19	184.70	52
SCE-16PBHSS	S1	12	491.20	202
SCE-16PBHSSI	S1	10	491.20	204
SCE-16PBI	A1	11	120.40	42
SCE-16PBXI	A1	13	141.70	46
SCE-16PBXSS	S1	12	442.51	198
SCE-16PBXSSI	S1	11	442.51	200
SCE-18169CHQRF	F1	19	*	270
SCE-1816FG	F1	20	*	268
SCE-1816FW	F1	20	*	272
SCE-18P16AL	F2	3	*	312
SCE-18SBASE	P2	21	111.76	299
SCE-18SBASESS	P2	16	424.63	299
SCE-19ELJEXPP	P2	13	152.23	320
SCE-1PB	A1	2	43.90	40
SCE-1PBA	A1	3	65.22	54
SCE-1PBAI	A1	3	65.22	56
SCE-1PBF	F1	2	*	266
SCE-1PBGX	A1	2	50.17	48
SCE-1PBI	A1	2	43.90	42
SCE-1PBSS	S1	2	134.38	198
SCE-1PBSSI	S1	2	134.38	200
SCE-1PBX	A1	3	56.43	44
SCE-1PBXI	A1	3	56.43	46

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-1PBXSS	S1	3	179.00	198
SCE-1PBXSSI	S1	3	179.00	200
SCE-201610ELJ	E1	26	185.13	58
SCE-20166ELJ	E1	22	151.40	58
SCE-20168ELJ	E1	23	157.76	58
SCE-2016CHQRF	F1	21	*	270
SCE-2016FG	F1	21	*	268
SCE-2016FW	F1	21	*	272
SCE-202010ELJ	E1	30	187.50	58
SCE-20206ELJ	E1	24	168.36	58
SCE-20208ELJ	E1	27	178.20	58
SCE-20208ELJW	E1	27	242.20	60
SCE-20C20ELJ	A1	34	218.21	10
SCE-20C20ELJSS	S1	25	957.18	178
SCE-20C24ELJ	A1	42	243.28	10
SCE-20C24ELJSS	S1	31	1,100.25	178
SCE-20C30ELJ	A1	60	278.41	10
SCE-20C30ELJSS	S1	125	1,320.04	178
SCE-20EL1206LP	E3	23	209.13	70
SCE-20EL1606LP	E3	28	225.12	70
SCE-20EL1606SS6LP	S7	28	871.43	220
SCE-20EL1606SSLP	S5	28	726.19	218
SCE-20EL1608LP	E3	30	237.42	70
SCE-20EL1608SS6LP	S7	32	925.17	220
SCE-20EL1608SSLP	S5	30	770.98	218
SCE-20EL1608SSST	S8	30	1,079.37	222
SCE-20EL1610LP	E3	41	252.38	70
SCE-20EL1610SS6LP	S7	36	987.08	220
SCE-20EL1610SSLP	S5	34	822.57	218
SCE-20EL1612LP	E3	38	263.25	70
SCE-20EL1612SSST	S8	39	1,210.13	222
SCE-20EL2006LP	E3	33	242.34	70
SCE-20EL2006SS6LP	S7	33	952.88	220
SCE-20EL2006SSLP	S5	34	794.06	218
SCE-20EL2008LP	E3	36	255.87	70
SCE-20EL2008SS6LP	S7	38	1,024.54	220
SCE-20EL2008SSLP	S5	37	853.79	218
SCE-20EL2008SSST	S8	38	1,195.31	222
SCE-20EL2010LP	E3	42	270.07	70
SCE-20EL2010SS6LP	S7	40	1,091.33	220
SCE-20EL2010SSLP	S5	40	909.44	218
SCE-20EL2012LP	E3	43	284.17	70
SCE-20EL2012SSST	S8	47	1,343.69	222
SCE-20EL2408LP	E3	42	275.56	70
SCE-20EL2408SS6LP	S7	46	1,120.64	220
SCE-20EL2408SSLP	S5	43	933.87	218
SCE-20H1206LP	A3	24	225.73	74
SCE-20H1208LP	A3	26	238.27	74
SCE-20H1606LP	A3	30	245.80	74
SCE-20H1606SS6LP	S7	30	918.65	226
SCE-20H1606SSLP	S3	30	765.54	224
SCE-20H1608LP	A3	31	258.34	74
SCE-20H1608QFGLP	F1	18	*	274
SCE-20H1608SS6LP	S7	34	983.81	226

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-20H1608SSLP	S3	33	819.84	224
SCE-20H1610LP	A3	34	270.87	74
SCE-20H1610QFGLP	F1	19	*	274
SCE-20H1610SS6LP	S7	36	1,050.60	226
SCE-20H1610SSLP	S3	35	875.50	224
SCE-20H1612LP	A3	37	285.93	74
SCE-20H1612QFGLP	F1	22	*	274
SCE-20H2006LP	A3	34	263.35	74
SCE-20H2006SS6LP	S7	36	1,013.14	226
SCE-20H2006SSLP	S3	35	844.28	224
SCE-20H2008LP	A3	33	278.41	74
SCE-20H2010LP	A3	41	293.45	74
SCE-20H2406LP	A3	40	283.43	74
SCE-20H2408LP	A3	44	300.48	74
SCE-20H2408SS6LP	S7	44	1,189.05	226
SCE-20H2408SSLP	S3	45	990.88	224
SCE-20H3006LP	A3	48	341.10	74
SCE-20N16MP	N1	6	21.62	313
SCE-20N16MPP	N1	3	26.46	314
SCE-20N20MP	N1	7	27.84	313
SCE-20N20MPP	N1	4	30.55	314
SCE-20P12	P3	5	23.14	308
SCE-20P12GALV	P3	6	23.14	310
SCE-20P16	P3	8	30.37	308
SCE-20P16AL	F2	3	*	312
SCE-20P16GALV	P3	7	30.37	310
SCE-20P16J	P3	5	30.40	315
SCE-20P20	P3	10	35.44	308
SCE-20P20C	P3	7	39.00	10
SCE-20P20GALV	P3	10	35.44	310
SCE-20P20J	P3	8	35.44	315
SCE-20P24C	P3	8	42.30	10
SCE-20P30C	P3	10	47.32	10
SCE-20PBH	A1	22	287.54	50
SCE-20PJ16AL	F2	4	*	312
SCE-20POS	C2	17	247.74	29
SCE-20RMW	P2	18	223.52	296
SCE-20STS	C2	13	70.41	29
SCE-20VESTS	C2	13	169.51	29
SCE-20XEL2108LP	E3	40	349.36	82
SCE-20XEL2108SS6LP	S7	41	1,091.33	232
SCE-20XEL2108SSLP	S5	41	909.44	230
SCE-20XEL2110LP	E3	43	367.82	82
SCE-2233X	P2	1	11.50	328
SCE-22POS	C2	18	251.26	29
SCE-22STS	C2	16	73.82	29
SCE-22VEPOS	C2	18	317.95	29
SCE-22VESTS	C2	16	175.04	29
SCE-244208WFLP	A4	80	531.50	80
SCE-244808WFLP	A4	94	576.22	80
SCE-244812WFLP	A4	131	615.84	80
SCE-24EL1206LP	E3	28	218.97	70
SCE-24EL1606LP	E3	33	239.89	70
SCE-24EL1608LP	E3	36	253.42	70

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-24EL1608SS6LP	S7	38	1,008.25	220
SCE-24EL1608SSLP	S5	36	840.20	218
SCE-24EL2006LP	E3	38	260.80	70
SCE-24EL2006SS6LP	S7	42	1,068.52	220
SCE-24EL2006SSLP	S5	40	890.43	218
SCE-24EL2008LP	E3	42	275.56	70
SCE-24EL2008SS6LP	S7	44	1,120.64	220
SCE-24EL2008SSLP	S5	43	933.87	218
SCE-24EL2008SSST	S8	40	1,307.56	222
SCE-24EL2010LP	E3	46	292.78	70
SCE-24EL2010SS6LP	S7	48	1,197.20	220
SCE-24EL2010SS6LPPL	S7	61	1,342.98	216
SCE-24EL2010SSLP	S5	48	997.67	218
SCE-24EL2010SSLPPL	S9	48	1,119.15	216
SCE-24EL2012LP	E3	50	307.54	70
SCE-24EL2012SS6LP	S7	52	1,270.49	220
SCE-24EL2012SSLP	S5	53	1,058.74	218
SCE-24EL2012SSST	S8	56	1,482.24	222
SCE-24EL2016LP	E3	63	337.06	70
SCE-24EL2406LP	E3	45	281.71	70
SCE-24EL2408LP	E3	48	297.70	70
SCE-24EL2408SS6LP	S7	51	1,231.40	220
SCE-24EL2408SSLP	S5	49	1,026.17	218
SCE-24EL2408SSST	S8	50	1,436.64	222
SCE-24EL2410LP	E3	53	314.93	70
SCE-24EL2410SS6LP	S7	55	1,316.08	220
SCE-24EL2410SS6LPPL	S7	54	1,461.86	216
SCE-24EL2410SSLP	S5	54	1,096.74	218
SCE-24EL2410SSLPPL	S9	54	1,218.22	216
SCE-24EL2412LP	E3	56	329.69	70
SCE-24EL2412SS6LP	S7	58	1,400.80	220
SCE-24EL2412SSLP	S5	58	1,167.34	218
SCE-24EL2412SSST	S8	66	1,634.28	222
SCE-24EL2416LP	E3	71	362.90	70
SCE-24EL2416SS6LP	S7	72	1,588.12	220
SCE-24EL2416SSLP	S5	72	1,323.43	218
SCE-24EL3008LP	E3	53	329.69	70
SCE-24EL3008SS6LP	S7	58	1,399.17	220
SCE-24EL3008SSLP	S5	58	1,165.97	218
SCE-24EL3010LP	E3	63	355.51	70
SCE-24EL3010SS6LP	S7	64	1,505.04	220
SCE-24EL3010SSLP	S5	64	1,254.20	218
SCE-24EL3012LP	E3	78	380.54	70
SCE-24EL4210SSWFLP	S5	91	2,990.12	228
SCE-24EL4210WFLP	A4	91	821.92	78
SCE-24EL4810SSWFLP	S5	99	3,108.66	228
SCE-24EL4810WFLP	A4	99	854.84	78
SCE-24H1206LP	A3	28	238.10	74
SCE-24H1208LP	A3	32	253.33	74
SCE-24H1210LP	A3	39	265.86	74
SCE-24H1606LP	A3	32	260.85	74
SCE-24H1608LP	A3	36	275.89	74
SCE-24H1608SS6LP	S7	37	1,070.15	226
SCE-24H1608SSLP	S3	39	891.79	224
SCE-24H2006LP	A3	39	283.43	74
SCE-24H2006SS6LP	S7	41	1,109.24	226

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-24H2006SSLP	S3	40	924.36	224
SCE-24H2008LP	A3	43	300.98	74
SCE-24H2008SS6LP	S7	45	1,189.05	226
SCE-24H2008SSLP	S3	44	990.88	224
SCE-24H2010LP	A3	46	316.04	74
SCE-24H2010QFGLP	F1	32	*	274
SCE-24H2010SS6LP	S7	49	1,270.49	226
SCE-24H2010SSLP	S3	48	1,058.74	224
SCE-24H2012LP	A3	50	333.58	74
SCE-24H2016LP	A3	60	366.19	74
SCE-24H2406LP	A3	43	305.99	74
SCE-24H2406SSLP	S3	45	950.00	224
SCE-24H2408LP	A3	50	323.55	74
SCE-24H2408SS6LP	S7	51	1,307.95	226
SCE-24H2408SSLP	S3	50	1,089.96	224
SCE-24H2410LP	A3	55	341.10	74
SCE-24H2412LP	A3	56	358.66	74
SCE-24H2412SS6LP	S7	60	1,485.51	226
SCE-24H2412SSLP	S3	58	1,237.92	224
SCE-24H2416LP	A3	72	393.78	74
SCE-24H3008LP	A3	48	358.66	74
SCE-24H3008SS6LP	S7	61	1,485.51	226
SCE-24H3008SSLP	S3	61	1,237.92	224
SCE-24HS2108SS6LP	S7	48	1,338.91	236
SCE-24HS2108SSLP	S3	47	1,115.76	236
SCE-24HS2508SS6LP	S7	51	1,472.47	236
SCE-24HS2508SSLP	S3	51	1,227.06	236
SCE-24KB	P2	32	447.04	297
SCE-24N16MP	N1	7	22.89	313
SCE-24N16MPP	N1	5	30.55	314
SCE-24N20MP	N1	9	31.67	313
SCE-24N20MPP	N1	7	36.52	314
SCE-24N24MP	N1	11	36.97	313
SCE-24N24MPP	N1	8	53.44	314
SCE-24P12AL	F2	4	*	312
SCE-24P16	P3	11	32.92	308
SCE-24P16GALV	P3	11	32.92	310
SCE-24P20	P3	14	45.57	308
SCE-24P20AL	F2	4	*	312
SCE-24P20GALV	P3	14	47.85	310
SCE-24P24	P3	17	53.18	308
SCE-24P24GALV	P3	17	55.84	310
SCE-24PEBASE	C2	21	545.02	33
SCE-24PEBASESS	C2	23	1,363.86	33
SCE-24SBASE	P2	47	253.32	299
SCE-24SBASESS	P2	25	451.45	299
SCE-24XEL2108LP	E3	47	376.43	82
SCE-24XEL2108SS6LP	S7	48	1,189.05	232
SCE-24XEL2108SSLP	S5	47	990.88	230
SCE-24XEL2508LP	E3	54	405.95	82
SCE-24XEL2508SS6LP	S7	49	1,293.30	232
SCE-24XEL2508SSLP	S5	57	1,077.75	230
SCE-24XEL2510LP	E3	59	425.65	82
SCE-24XEL2510SS6LP	S7	60	1,382.87	232
SCE-24XEL2510SSLP	S5	57	1,152.39	230
SCE-24XEL2510SSST	S8	55	1,555.73	234

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-26POS	C2	18	254.25	29
SCE-26STS	C2	18	76.92	29
SCE-26VESTS	C2	17	182.54	29
SCE-2PB	A1	2	50.17	40
SCE-2PBA	A1	3	75.24	54
SCE-2PBAI	A1	3	75.24	56
SCE-2PBFG	F1	2	*	266
SCE-2PBGX	A1	2	55.18	48
SCE-2PBI	A1	3	50.17	42
SCE-2PBSS	S1	2	168.31	198
SCE-2PBSSI	S1	2	168.31	200
SCE-2PBX	A1	3	65.22	44
SCE-2PBXI	A1	4	65.22	46
SCE-2PBXSS	S1	4	224.05	198
SCE-304210WFLP	A4	113	635.82	80
SCE-304810WFLP	A4	117	690.46	80
SCE-306010WFLP	A4	143	799.74	80
SCE-30EL1606LP	E3	37	263.25	70
SCE-30EL1606SS6LP	S7	42	1,172.77	220
SCE-30EL1606SSLP	S5	41	977.30	218
SCE-30EL2008LP	E3	50	303.85	70
SCE-30EL2008SS6LP	S7	52	1,270.49	220
SCE-30EL2008SSLP	S5	52	1,058.74	218
SCE-30EL2010LP	E3	53	319.84	70
SCE-30EL2010SS6LP	S7	57	1,376.37	220
SCE-30EL2010SSLP	S5	56	1,146.97	218
SCE-30EL2406LP	E3	31	309.63	70
SCE-30EL2408LP	E3	55	329.69	70
SCE-30EL2408SS6LP	S7	53	1,400.80	220
SCE-30EL2408SSLP	S5	53	1,167.34	218
SCE-30EL2408SSST	S8	90	1,634.28	222
SCE-30EL2410LP	E3	68	355.51	70
SCE-30EL2410SS6LP	S7	68	1,506.67	220
SCE-30EL2410SSLP	S5	68	1,255.56	218
SCE-30EL2412LP	E3	63	366.59	70
SCE-30EL2412SS6LP	S7	69	1,596.26	220
SCE-30EL2412SS6LPPL	S7	79	1,744.88	216
SCE-30EL2412SSLP	S5	69	1,330.21	218
SCE-30EL2412SSLPPL	S9	69	1,454.07	216
SCE-30EL2412SSST	S8	71	1,862.29	222
SCE-30EL2416LP	E3	80	404.72	70
SCE-30EL2416SS6LP	S7	80	1,759.14	220
SCE-30EL2416SSLP	S5	80	1,465.95	218
SCE-30EL2420LP	E3	91	441.62	70
SCE-30EL2424LP	E3	99	478.53	70
SCE-30EL3008LP	E3	63	369.05	70
SCE-30EL3008SS6LP	S7	67	1,604.41	220
SCE-30EL3008SSLP	S5	67	1,337.00	218
SCE-30EL3008SSST	S8	73	1,871.80	222
SCE-30EL3010LP	E3	82	410.87	70
SCE-30EL3010SS6LP	S7	81	1,702.14	220
SCE-30EL3010SSLP	S5	81	1,418.45	218
SCE-30EL3012LP	E3	82	423.17	70
SCE-30EL3012SS6LP	S7	89	1,808.01	220

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-30EL3012SS6LPPL	S7	89	1,956.64	216
SCE-30EL3012SSSLP	S5	89	1,506.67	218
SCE-30EL3012SSLPPL	S9	89	1,630.53	216
SCE-30EL3608LP	E3	84	408.42	70
SCE-30EL3608SS6LP	S7	84	1,794.98	220
SCE-30EL3608SSSLP	S5	84	1,495.82	218
SCE-30EL4210SSWFLP	S5	120	3,168.28	228
SCE-30EL4210WFLP	A4	120	866.84	78
SCE-30EL4810SSWFLP	S5	127	3,347.42	228
SCE-30EL4810WFLP	A4	127	954.91	78
SCE-30EL6010SSWFLP	S5	187	3,758.21	228
SCE-30EL6010WFLP	A4	187	1,055.50	78
SCE-30H1606LP	A3	41	285.93	74
SCE-30H2006LP	A3	48	311.00	74
SCE-30H2008LP	A3	50	331.07	74
SCE-30H2008SS6LP	S7	53	1,345.42	226
SCE-30H2008SSSLP	S3	52	1,121.18	224
SCE-30H2010LP	A3	55	348.61	74
SCE-30H2010QFGLP	F1	37	*	274
SCE-30H2406LP	A3	56	338.60	74
SCE-30H2408LP	A3	61	358.66	74
SCE-30H2408SS6LP	S7	61	1,485.51	226
SCE-30H2408SSSLP	S3	60	1,237.92	224
SCE-30H2409QFGLP	F1	46	*	274
SCE-30H2410LP	A3	68	378.73	74
SCE-30H2412LP	A3	73	398.79	74
SCE-30H2412QFGLP	F1	51	*	274
SCE-30H2412SS6LP	S7	69	1,684.21	226
SCE-30H2412SSSLP	S3	69	1,403.51	224
SCE-30H2414QFGLP	F1	55	*	274
SCE-30H2416LP	A3	80	438.92	74
SCE-30H2416SS6LP	S7	81	1,886.18	226
SCE-30H2416SSSLP	S3	81	1,571.81	224
SCE-30H2420LP	A3	91	479.05	74
SCE-30H2424LP	A3	99	519.19	75
SCE-30H3008LP	A3	74	401.30	75
SCE-30H3008SS6LP	S7	74	1,697.26	226
SCE-30H3008SSSLP	S3	74	1,414.38	224
SCE-30H3012LP	A3	89	446.44	75
SCE-30H3608LP	A3	84	443.93	75
SCE-30HS2508SS6LP	S7	61	1,671.19	236
SCE-30HS2508SSSLP	S3	61	1,392.66	236
SCE-30N24MP	N1	13	43.99	313
SCE-30N24MPP	N1	11	68.13	314
SCE-30N30MP	N1	17	58.07	313
SCE-30N30MPP	N1	14	85.12	314
SCE-30P16	P3	14	45.57	308
SCE-30P16GALV	P3	14	47.85	310
SCE-30P20	P3	18	55.70	308
SCE-30P20AL	F2	5	*	312
SCE-30P20GALV	P3	18	58.49	310
SCE-30P24	P3	22	63.29	308
SCE-30P24AL	F2	6	*	312
SCE-30P24GALV	P3	22	66.45	310

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-30P30	P3	28	83.55	308
SCE-30P30GALV	P3	28	87.73	310
SCE-30XEL2508LP	E3	63	450.25	82
SCE-30XEL2508SS6LP	S7	54	1,515.05	232
SCE-30XEL2508SSSLP	S5	54	1,262.54	230
SCE-30XEL2510LP	E3	67	473.62	82
SCE-30XEL2510SS6LP	S7	70	1,650.98	232
SCE-30XEL2510SSSLP	S5	70	1,375.82	230
SCE-30XEL2510SSST	S8	61	1,759.14	234
SCE-342424SSWS	S3	198	5,768.79	182
SCE-342424WS	C2	193	1,676.11	24
SCE-364212WFLP	A4	135	740.14	80
SCE-364216WFLP	A4	145	805.15	80
SCE-364810WFLP	A4	137	794.78	80
SCE-364812WFLP	A4	140	807.20	80
SCE-364816WFLP	A4	150	881.94	80
SCE-366012WFLP	A4	191	941.31	80
SCE-366016WFLP	A4	208	1,048.69	80
SCE-36EL2408LP	E3	64	362.90	70
SCE-36EL2408SS6LP	S7	66	1,579.97	220
SCE-36EL2408SSSLP	S5	66	1,316.64	218
SCE-36EL2408SSST	S8	71	1,843.30	222
SCE-36EL2410LP	E3	74	392.42	70
SCE-36EL2410SS6LP	S7	74	1,685.86	220
SCE-36EL2410SSSLP	S5	74	1,404.88	218
SCE-36EL2412LP	E3	77	404.72	71
SCE-36EL2412SS6LPPL	S7	90	1,933.78	216
SCE-36EL2412SSLPPL	S9	90	1,611.48	216
SCE-36EL2412SSST	S8	78	2,072.73	222
SCE-36EL2416LP	E3	82	418.25	71
SCE-36EL3008LP	E3	73	408.42	71
SCE-36EL3008SS6LP	S7	75	1,794.98	220
SCE-36EL3008SSSLP	S5	75	1,495.82	218
SCE-36EL3008SSST	S8	77	2,094.15	222
SCE-36EL3010LP	E3	89	435.47	71
SCE-36EL3010SS6LP	S7	89	1,928.54	220
SCE-36EL3010SSSLP	S5	89	1,607.12	218
SCE-36EL3012LP	E3	87	452.70	71
SCE-36EL3012SS6LP	S7	94	2,044.18	220
SCE-36EL3012SS6LPPL	S7	111	2,195.66	216
SCE-36EL3012SSSLP	S5	94	1,703.48	218
SCE-36EL3012SSLPPL	S9	94	1,829.72	216
SCE-36EL3012SSST	S8	99	2,384.87	222
SCE-36EL3016LP	E3	114	498.22	71
SCE-36EL3016SSSLP	S5	141	1,797.36	218
SCE-36EL3016SSST	S8	110	2,528.04	222
SCE-36EL3020LP	E3	123	542.51	71
SCE-36EL3608LP	E3	102	452.70	71
SCE-36EL3608SS6LP	S7	102	2,068.63	220
SCE-36EL3608SSSLP	S5	102	1,723.86	218
SCE-36EL3610LP	E3	136	488.77	71
SCE-36EL3612LP	E3	111	501.91	71
SCE-36EL3612SS6LP	S7	111	2,296.66	220
SCE-36EL3612SSSLP	S5	111	1,913.89	218
SCE-36EL3616LP	E3	122	551.11	71
SCE-36EL4212SSWFLP	S5	155	3,772.54	228

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-36EL4216WFLP	A4	155	1,047.13	78	SCE-36X2D5412	A2	187	1,463.80	128
SCE-36EL4812SSWFLP	S5	134	3,866.89	228	SCE-36XEL2508LP	E3	75	496.98	82
SCE-36EL4812WFLP	A4	134	1,101.45	78	SCE-36XEL2508SS6LP	S7	68	1,738.16	232
SCE-36EL6012SSWFLP	S5	153	4,269.15	228	SCE-36XEL2508SSLP	S5	68	1,448.47	230
SCE-36EL6012WFLP	A4	153	1,223.32	78	SCE-36XEL2510LP	E3	75	521.58	82
SCE-36H1606LP	A3	48	303.48	75	SCE-36XEL3108LP	E3	92	554.81	82
SCE-36H2406LP	A3	63	371.21	75	SCE-36XEL3110LP	E3	96	586.79	82
SCE-36H2408LP	A3	65	393.78	75	SCE-36XEL3110SS6LP	S7	96	2,045.09	232
SCE-36H2408SS6LP	S7	66	1,663.04	226	SCE-36XEL3110SSLP	S5	96	1,704.24	230
SCE-36H2408SSLP	S3	66	1,385.87	224	SCE-36XEL3110SSST	S8	77	1,968.03	234
SCE-36H2410LP	A3	74	416.36	75	SCE-36XEL3112LP	E3	105	618.78	82
SCE-36H2410SS6LP	S7	72	1,775.43	226	SCE-36XEL3112SS6LP	S7	84	2,162.90	232
SCE-36H2410SSLP	S3	72	1,479.52	224	SCE-36XEL3112SSLP	S5	84	1,802.42	230
SCE-36H2412LP	A3	77	438.92	75	SCE-36XEL3116LP	E3	113	675.37	82
SCE-36H2416LP	A3	80	489.09	75	SCE-3916	P2	1	10.27	328
SCE-36H3006LP	A3	110	418.86	75	SCE-3916SS	P2	1	21.69	328
SCE-36H3008LP	A3	84	443.93	75	SCE-3918	P2	1	16.62	328
SCE-36H3008SS6LP	S7	87	1,907.36	226	SCE-3918SS	P2	1	39.84	328
SCE-36H3008SSLP	S3	87	1,589.47	224	SCE-3PB	A1	3	56.43	40
SCE-36H3010LP	A3	89	469.01	75	SCE-3PBA	A1	4	85.28	54
SCE-36H3010QFGLP	F1	76	*	274	SCE-3PBAL	A1	4	85.28	56
SCE-36H3010SS6LP	S7	89	2,029.53	226	SCE-3PBFGL	F1	2	*	266
SCE-36H3010SSLP	S3	89	1,691.28	224	SCE-3PBGX	A1	4	61.45	48
SCE-36H3012LP	A3	94	491.60	75	SCE-3PBI	A1	3	56.43	42
SCE-36H3012QFGLP	F1	79	*	274	SCE-3PBSS	S1	3	183.25	198
SCE-36H3012SS6LP	S7	97	2,151.69	226	SCE-3PBSSI	S1	3	183.25	200
SCE-36H3012SSLP	S3	97	1,793.07	224	SCE-3PBX	A1	3	73.99	44
SCE-36H3014QFGLP	F1	82	*	274	SCE-3PBXI	A1	4	73.99	46
SCE-36H3016LP	A3	106	541.76	75	SCE-3PTL	P2	1	62.09	292
SCE-36H3016SS6LP	S7	105	2,394.40	226	SCE-400AFSD	P2	25	154.64	323
SCE-36H3016SSLP	S3	105	1,995.33	224	SCE-402516SDC	C1	147	942.59	18
SCE-36H3020LP	A3	103	589.41	75	SCE-403716SDC	C1	167	1,071.39	18
SCE-36H3608LP	A3	102	491.60	75	SCE-4044CHNF	A1	3	38.97	66
SCE-36H3612LP	A3	114	546.77	75	SCE-4044SC	A1	3	37.62	68
SCE-36H3612SS6LP	S7	113	2,417.18	226	SCE-404CHNF	A1	3	37.68	66
SCE-36H3612SSLP	S3	113	2,014.32	224	SCE-404SC	A1	2	37.62	68
SCE-36H3616LP	A3	126	599.43	75	SCE-40EL2412LP	E3	89	428.10	71
SCE-36HS2508SS6LP	S7	69	1,869.90	236	SCE-40P24	P3	40	86.08	308
SCE-36HS2508SSLP	S3	69	1,558.25	236	SCE-40P24GALV	P3	40	94.69	310
SCE-36HS3108SS6LP	S7	83	2,143.55	236	SCE-424212WFLP	A4	162	817.12	80
SCE-36HS3108SSLP	S3	83	1,786.29	236	SCE-424216WFLP	A4	179	928.01	80
SCE-36N24MP	N1	21	52.80	313	SCE-424812WFLP	A4	171	891.63	80
SCE-36N24MPP	N1	13	85.12	314	SCE-424816WFLP	A4	187	1,000.42	80
SCE-36N30MP	N1	21	70.39	313	SCE-426012WFALP	A4	213	1,040.65	80
SCE-36N30MPP	N1	17	100.48	314	SCE-426016WFALP	A4	231	1,193.48	80
SCE-36P16	P3	17	53.18	308	SCE-42EL2410LP	E3	79	457.63	71
SCE-36P16GALV	P3	14	55.84	310	SCE-42EL2410SS6LP	S7	84	1,954.61	220
SCE-36P24	P3	27	75.96	308	SCE-42EL2410SSLP	S5	84	1,628.84	218
SCE-36P24GALV	P3	27	79.76	310	SCE-42EL3008LP	E3	101	449.01	71
SCE-36P30	P3	34	101.27	308	SCE-42EL3010LP	E3	105	471.15	71
SCE-36P30AL	F2	9	*	312	SCE-42EL3010SS6LP	S7	105	2,140.28	220
SCE-36P30GALV	P3	27	111.40	310	SCE-42EL3010SSLP	S5	105	1,783.57	218
SCE-36P36	P3	35	118.99	308	SCE-42EL3012LP	E3	111	496.98	71
SCE-36P36AL	F2	11	*	312	SCE-42EL3016LP	E3	117	528.98	71
SCE-36P36GALV	P3	35	130.89	310					
SCE-36P52	P3	56	161.54	130					

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-42EL3608LP	E3	117	499.46	71
SCE-42EL3610LP	E3	127	524.06	71
SCE-42EL3612LP	E3	123	551.11	71
SCE-42EL3612SS6LP	S7	124	2,527.96	220
SCE-42EL3612SS6LPPL	S7	155	2,673.30	216
SCE-42EL3612SSLP	S5	124	2,106.63	218
SCE-42EL3612SSLPPL	S9	124	2,227.75	216
SCE-42EL3616LP	E3	149	605.24	71
SCE-42EL3616SS6LP	S7	149	2,684.32	220
SCE-42EL3616SSLP	S5	149	2,236.93	218
SCE-42EL4212SSWFLP	S5	147	3,824.34	228
SCE-42EL4212WFLP	A4	147	1,166.94	78
SCE-42EL4812SSWFLP	S5	148	4,248.08	228
SCE-42EL4812WFLP	A4	148	1,273.68	78
SCE-42EL6012SSWFALP	S5	158	4,460.85	228
SCE-42EL6012WFALP	A4	158	1,420.06	78
SCE-42H2408LP	A3	79	431.40	75
SCE-42H3008LP	A3	101	486.58	75
SCE-42H3010LP	A3	105	511.65	75
SCE-42H3010SS6LP	S7	102	2,251.05	226
SCE-42H3010SSLP	S3	102	1,875.88	224
SCE-42H3012LP	A3	111	539.24	75
SCE-42H3016LP	A3	120	594.42	75
SCE-42H3608LP	A3	117	541.76	75
SCE-42H3608SS6LP	S7	114	2,394.40	226
SCE-42H3608SSLP	S3	114	1,995.33	224
SCE-42H3610LP	A3	127	569.34	75
SCE-42H3612LP	A3	140	599.43	75
SCE-42H3616LP	A3	149	657.13	75
SCE-42HS3112SS6LP	S7	111	2,684.32	236
SCE-42HS3112SSLP	S3	111	2,236.93	236
SCE-42HS3712SS6LP	S7	132	3,016.60	236
SCE-42HS3712SSLP	S3	132	2,513.83	236
SCE-42P24	P3	31	91.14	308
SCE-42P24GALV	P3	25	100.25	310
SCE-42P30	P3	33	116.47	308
SCE-42P30GALV	P3	33	128.12	310
SCE-42P36	P3	39	136.72	308
SCE-42P36GALV	P3	39	157.23	310
SCE-42P42	P3	50	156.97	308
SCE-42P42GALV	P3	50	180.52	310
SCE-42P52	P3	64	209.39	130
SCE-42X2D5412	A2	212	1,530.37	128
SCE-42XEL3110LP	E3	108	642.15	82
SCE-42XEL3110SS6LP	S7	108	2,329.23	232
SCE-42XEL3110SSLP	S5	108	1,941.03	230
SCE-42XEL3112LP	E3	122	676.59	82
SCE-42XEL3112SS6LP	S7	117	2,459.55	232
SCE-42XEL3112SSLP	S5	117	2,049.63	230
SCE-42XEL3116LP	E3	132	735.64	82
SCE-42XEL3710LP	E3	117	699.97	82
SCE-42XEL3712LP	E3	136	752.87	82
SCE-42XEL3712LP12	E3	117	908.77	82
SCE-42XEL3712SS6LP	S7	127	2,671.29	232

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-42XEL3712SSLP	S5	127	2,226.07	230
SCE-42XEL3716LP	E3	150	826.68	82
SCE-42XEL3716SS6LP	S7	150	2,988.92	232
SCE-42XEL3716SSLP	S5	150	2,490.77	230
SCE-44CCOL	P2	15	183.79	299
SCE-44CCOLSS	P2	15	524.13	299
SCE-44PBCOL	P2	18	218.56	299
SCE-462519DC	C1	140	1,383.50	18
SCE-462519SDC	C1	172	1,298.64	18
SCE-463719DC	C1	192	1,522.45	18
SCE-463719SDC	C1	200	1,441.43	18
SCE-464919DC	C1	215	1,753.31	18
SCE-464919DCC	C1	235	2,061.51	18
SCE-464919SDC	C1	225	1,667.18	18
SCE-466019DC	C1	240	2,330.54	18
SCE-466019DCC	C1	255	2,648.34	18
SCE-466019SDC	C1	250	2,158.34	18
SCE-484812WFLP	A4	223	973.60	80
SCE-484816WFLP	A4	248	1,138.64	80
SCE-48EL2408LP	E3	83	429.32	71
SCE-48EL2412LP	E3	99	477.30	71
SCE-48EL3008LP	E3	128	498.72	71
SCE-48EL3010LP	E3	117	512.98	71
SCE-48EL3016LP	E3	159	574.49	71
SCE-48EL3608LP	E3	129	542.51	71
SCE-48EL3610LP	E3	137	573.27	71
SCE-48EL3612LP	E3	133	600.33	71
SCE-48EL3612SS6LP	S7	131	2,801.61	220
SCE-48EL3612SS6LPPL	S7	188	2,949.80	216
SCE-48EL3612SSLP	S5	131	2,334.67	218
SCE-48EL3612SSLPPL	S9	131	2,458.17	216
SCE-48EL3616LP	E3	149	658.14	71
SCE-48EL3616SS6LP	S7	153	3,054.06	220
SCE-48EL3616SSLP	S5	153	2,545.05	218
SCE-48EL3616SSST	S8	173	3,563.07	222
SCE-48EL3620LP	E3	173	715.97	71
SCE-48EL4812SSWFLP	S5	152	4,359.04	228
SCE-48EL4812WFLP	A4	152	1,383.23	78
SCE-48H2408LP	A3	83	466.51	75
SCE-48H3008LP	A3	104	529.22	75
SCE-48H3010LP	A3	117	556.80	75
SCE-48H3016LP	A3	134	644.58	75
SCE-48H3608LP	A3	129	589.41	75
SCE-48H3608SS6LP	S7	126	2,638.72	226
SCE-48H3608SSLP	S3	126	2,198.93	224
SCE-48H3610LP	A3	137	622.02	75
SCE-48H3612LP	A3	145	652.12	75
SCE-48H3612SS6LP	S7	140	2,948.19	226
SCE-48H3612SSLP	S3	140	2,456.83	224
SCE-48H3616LP	A3	153	714.82	75
SCE-48H3616SS6LP	S7	158	3,259.31	226
SCE-48H3616SSLP	S3	158	2,716.09	224
SCE-48H3620LP	A3	173	777.52	75
SCE-48HS3712SS6LP	S7	147	3,316.32	236
SCE-48HS3712SSLP	S3	147	2,763.60	236
SCE-48P24	P3	36	98.74	308

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-48P24GALV	P3	31	108.61	310
SCE-48P30	P3	45	129.13	308
SCE-48P30GALV	P3	45	142.04	310
SCE-48P36	P3	55	154.46	308
SCE-48P36AL	F2	15	*	312
SCE-48P36GALV	P3	46	177.63	310
SCE-48P37	P3	52	148.54	131
SCE-48P42	P3	56	177.24	308
SCE-48P42GALV	P3	56	203.83	310
SCE-48P48	P3	80	212.67	308
SCE-48P48GALV	P3	80	244.57	310
SCE-48X2D7812	A2	325	1,904.94	128
SCE-48X2D7818	A2	372	2,125.52	128
SCE-48X3D11818	A2	535	3,065.56	129
SCE-48X4D15818	A2	699	4,186.87	129
SCE-48XEL3710LP	E3	127	778.70	82
SCE-48XEL3710SS6LP	S7	140	2,752.73	232
SCE-48XEL3710SSLP	S5	140	2,293.94	230
SCE-48XEL3712LP	E3	152	820.53	82
SCE-48XEL3712LP12	E3	152	800.53	82
SCE-48XEL3712SS6LP	S7	134	2,907.47	232
SCE-48XEL3712SSLP	S5	134	2,422.90	230
SCE-48XEL3716LP	E3	169	889.41	82
SCE-48XEL3716SS6LP	S7	169	3,233.25	232
SCE-48XEL3716SSLP	S5	169	2,694.37	230
SCE-48XEL3716SSST	S8	176	3,637.40	234
SCE-4PB	A1	5	62.70	40
SCE-4PBA	A1	5	96.56	54
SCE-4PBAI	A1	5	96.56	56
SCE-4PBGX	A1	4	67.71	48
SCE-4PBI	A1	5	62.70	42
SCE-4PBSS	S1	5	207.67	198
SCE-4PBSSI	S1	5	207.67	200
SCE-4PBX	A1	5	81.51	44
SCE-4PBXI	A1	6	81.51	46
SCE-4PBXSS	S1	6	247.05	198
SCE-4PBXSSI	S1	6	247.05	200
SCE-4SPB	A1	6	70.23	40
SCE-4SPBA	A1	6	107.85	54
SCE-4SPBAI	A1	7	107.85	56
SCE-4SPBH	A1	10	107.08	50
SCE-4SPBHI	A1	7	107.08	52
SCE-4SPBI	A1	6	70.23	42
SCE-4SPBSS	S1	5	228.03	198
SCE-4SPBSSI	S1	6	228.03	200
SCE-4SPBX	A1	5	82.76	44
SCE-4SPBXI	A1	5	82.76	46
SCE-5PB	A1	4	68.98	40
SCE-5PBI	A1	4	68.98	42
SCE-603624FS	A2	327	1,356.97	108
SCE-6044CHNF	A1	5	45.48	66
SCE-6044CHNFSS	S1	4	176.45	214
SCE-6044CHNFSS6	S7	4	211.74	214
SCE-6044SC	A1	4	47.65	68
SCE-6045CHQRFG	F1	3	*	270
SCE-604808LP	A2	337	1,491.36	106

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-604810LP	A2	360	1,539.46	106
SCE-604812LP	A2	379	1,587.57	106
SCE-604816LP	A2	407	1,681.26	106
SCE-604818FSD	A2	372	1,717.47	110
SCE-604818SSFSD	S2	372	7,417.15	250
SCE-604824LP	A2	430	1,873.69	106
SCE-604CHNF	A1	3	42.36	66
SCE-604ELJ	E1	3	41.16	58
SCE-604ELJSS	S6	3	135.53	206
SCE-604ELJSS6	S7	3	162.64	206
SCE-604FG	F1	3	*	268
SCE-604FW	F1	5	*	272
SCE-604SC	A1	3	42.64	68
SCE-606010LP	A2	425	1,724.30	106
SCE-606012LP	A2	436	1,777.47	106
SCE-606016LP	A2	466	1,883.81	106
SCE-606024LP	A2	525	2,096.51	106
SCE-6065CHQRFG	F1	4	*	270
SCE-606CHNF	A1	5	49.37	66
SCE-606CHNFSS	S1	5	220.89	214
SCE-606CHNFSS6	S7	5	241.06	214
SCE-606ELJ	E1	3	47.98	58
SCE-606ELJSS	S6	4	169.40	206
SCE-606ELJSS6	S7	4	203.28	206
SCE-606FG	F1	3	*	268
SCE-606FW	F1	3	*	272
SCE-606SC	A1	5	50.17	68
SCE-60AFSD	P2	13	126.84	323
SCE-60BFP42	P3	58	230.41	308
SCE-60BFP42GALV	P3	58	264.97	310
SCE-60EL2412LP	E3	141	551.11	71
SCE-60EL2418FS	A2	233	1,024.17	108
SCE-60EL2418SS6FS	S7	183	5,087.45	246
SCE-60EL2418SSFS	S4	183	4,239.55	246
SCE-60EL3608LP	E3	205	649.48	71
SCE-60EL3610LP	E3	164	667.98	71
SCE-60EL3612LP	E3	162	698.74	71
SCE-60EL3612SS6LP	S7	162	3,306.53	220
SCE-60EL3612SS6LPPL	S7	173	3,457.58	216
SCE-60EL3612SSLP	S5	162	2,755.44	218
SCE-60EL3612SSLPPL	S9	162	2,881.32	216
SCE-60EL3616LP	E3	195	765.17	71
SCE-60EL3616SS6LP	S7	195	3,567.15	220
SCE-60EL3616SSLP	S5	195	2,972.63	218
SCE-60EL3616SSST	S8	180	4,162.10	222
SCE-60EL3620LP	E3	209	832.83	71
SCE-60EL3624LP	E3	265	1,127.62	71
SCE-60EL3624SS6FS	S7	277	6,130.36	246
SCE-60EL3624SSFS	S4	277	5,108.64	246
SCE-60EL3624SSLP	S4	265	3,580.50	218
SCE-60EL4812LPPL	E2	509	1,997.80	104
SCE-60EL4812SS6LPPL	S7	509	8,347.79	242
SCE-60EL4812SSLPPL	S4	509	6,956.49	242
SCE-60EL4812SSST	S8	519	9,739.09	244

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-60EL4818LPPL	E2	515	2,037.17	104	SCE-60XEL3716LP	E3	198	1,040.74	82
SCE-60EL4818SS6FSD	S7	394	9,623.31	248	SCE-60XEL3716LP12	E3	198	1,020.74	82
SCE-60EL4818SS6LPPL	S7	515	8,854.36	242	SCE-60XEL3716SS6LP	S7	198	3,971.10	232
SCE-60EL4818SSFSD	S4	394	8,019.42	248	SCE-60XEL3716SSLP	S5	198	3,309.25	230
SCE-60EL4818SSLPPL	S4	515	7,378.64	242	SCE-60XEL3716SSST	S8	188	4,467.49	234
SCE-60EL4818SSST	S8	525	10,330.10	244	SCE-60XEL4912LP	A2	488	2,142.65	134
SCE-60EL6012LPPL	E2	561	2,189.71	104	SCE-60XEL4912SS6LP	S7	569	9,716.01	252
SCE-60EL6012SS6LPPL	S7	561	9,369.07	242	SCE-60XEL4912SSLP	S4	569	8,096.67	252
SCE-60EL6012SSLPPL	S4	561	7,807.56	242	SCE-60XEL4912SSST	S8	529	10,930.50	254
SCE-60EL6012SSST	S8	571	10,930.58	244	SCE-60XEL4918LP	A2	525	2,333.74	134
SCE-60EL6018LPPL	E2	590	2,229.09	104	SCE-60XEL4918SS6LP	S7	525	10,584.18	252
SCE-60EL6018SS6LPPL	S7	590	9,812.11	242	SCE-60XEL4918SSLP	S4	525	8,820.15	252
SCE-60EL6018SSLPPL	S4	590	8,176.75	242	SCE-60XEL4918SSST	S8	535	11,907.20	254
SCE-60EL6018SSST	S8	602	11,447.45	244	SCE-60XEL4924LP	A2	590	2,524.84	134
SCE-60FSCPS	P2	23	119.22	123	SCE-60XEL6112LP	A2	571	2,395.85	134
SCE-60FSHDPS	P2	18	114.24	123	SCE-60XEL6112SS6LP	S7	571	10,864.35	252
SCE-60H3608LP	A3	159	687.22	75	SCE-60XEL6112SSLP	S4	571	9,053.63	252
SCE-60H3610LP	A3	164	724.84	75	SCE-60XEL6112SSST	S8	584	12,222.40	254
SCE-60H3612LP	A3	173	759.96	75	SCE-60XEL6118LP	A2	600	2,609.64	134
SCE-60H3612SS6LP	S7	179	3,480.82	226	SCE-60XEL6118SS6LP	S7	600	11,831.85	252
SCE-60H3612SSLP	S3	179	2,900.69	224	SCE-60XEL6118SSLP	S4	600	9,859.88	252
SCE-60H3620LP	A3	235	902.92	75	SCE-60XEL6118SSST	S8	616	13,310.84	254
SCE-60HS3712SS6LP	S7	179	3,918.98	236	SCE-60XEL6124LP	A2	650	2,823.42	134
SCE-60HS3712SSLP	S3	179	3,265.81	236	SCE-642424SSWS	S3	295	6,379.61	180
SCE-60P24	P3	50	129.13	308	SCE-642424WS	C2	285	2,316.68	22
SCE-60P24F1	p3	37	173.85	120	SCE-642432SSWS	S3	300	6,583.22	180
SCE-60P24F2	p3	23	116.72	120	SCE-642432WS	C2	290	2,455.94	22
SCE-60P24GALV	P3	50	142.04	310	SCE-64P25	P3	50	159.52	308
SCE-60P24WS	C2	7	61.28	31	SCE-64P25GALV	P3	50	183.45	310
SCE-60P30	P3	57	159.52	308	SCE-64P31	P3	53	167.11	308
SCE-60P30GALV	P3	54	183.45	310	SCE-64P31GALV	P3	55	192.18	310
SCE-60P32WS	C2	9	70.41	31	SCE-64P37	P3	61	182.30	308
SCE-60P36	P3	58	189.89	308	SCE-64P37GALV	P3	62	209.65	310
SCE-60P36AL	F2	19	*	312	SCE-64P52	P3	111	334.21	308
SCE-60P36F1	p3	57	226.00	120	SCE-64P52GALV	P3	111	384.34	310
SCE-60P36F2	p3	35	141.56	120	SCE-64P64	P3	130	362.06	309
SCE-60P36GALV	P3	58	218.37	310	SCE-64P64GALV	P3	135	452.58	311
SCE-60P48	P3	100	268.38	308	SCE-64P76	P3	140	425.36	309
SCE-60P48F1	p3	98	362.60	120	SCE-64P76GALV	P3	164	531.70	311
SCE-60P48GALV	P3	100	308.64	310	SCE-66CCOL	P2	21	275.68	299
SCE-60P60	P3	123	331.68	308	SCE-66CCOLSS	P2	20	554.52	299
SCE-60P60GALV	P3	165	381.43	310	SCE-66PBCOL	P2	24	327.83	299
SCE-60PC36	P3	41	181.41	308	SCE-66ST2626SSWS	S3	246	7,354.91	184
SCE-60RA19TH	P2	14	106.80	122	SCE-66ST2626WS	C2	245	2,330.53	26
SCE-60RA19WS	C2	14	119.96	30	SCE-6N6MP	N1	1	2.82	313
SCE-60RA24WS	C2	14	125.17	30	SCE-6N6MPP	N1	1	7.36	314
SCE-60RP19WS	C2	7	58.68	30	SCE-6P4	P3	1	3.01	309
SCE-60RP24F5	P2	17	106.80	122	SCE-6P4AL	F2	1	*	312
SCE-60RP24F6	P2	6	62.09	122	SCE-6P4GALV	P3	1	3.01	311
SCE-60SMP14	p3	25	138.74	120	SCE-6P4J	P3	1	3.02	315
SCE-60XEL3710LP	E3	167	907.87	82	SCE-6P6	P3	1	3.61	309
SCE-60XEL3712LP	E3	187	953.38	82	SCE-6P6AL	F2	1	*	312
SCE-60XEL3712SS6LP	S7	189	3,629.05	232	SCE-6P6GALV	P3	1	3.61	311
SCE-60XEL3712SSLP	S5	189	3,024.20	230	SCE-6P6J	P3	1	3.62	315
					SCE-6PB	A1	8	80.26	40
					SCE-6PBA	A1	6	125.41	54

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-6PBAI	A1	8	125.41	56	SCE-72EL3016SS6LP	S7	236	3,827.77	220
SCE-6PBGX	A1	6	86.52	48	SCE-72EL3016SSLP	S5	236	3,189.81	218
SCE-6PBH	A1	12	122.63	50	SCE-72EL3018FS	A2	294	1,251.20	108
SCE-6PBHI	A1	11	122.63	52	SCE-72EL3018SS6FS	S7	248	5,800.09	246
SCE-6PBI	A1	5	80.26	42	SCE-72EL3018SSFS	S4	248	4,833.41	246
SCE-6PBSS	S1	5	272.84	198	SCE-72EL3024FS	A2	329	1,387.93	108
SCE-6PBSSI	S1	6	272.84	200	SCE-72EL3024FSDA	A2	362	1,624.31	112
SCE-6PBVL	A1	5	75.24	40	SCE-72EL3024LP	E3	242	941.08	71
SCE-6PBVLI	A1	5	75.24	42	SCE-72EL3024SS6FS	S7	360	6,440.73	246
SCE-6PBX	A1	8	95.31	44	SCE-72EL3024SSFS	S4	360	5,367.27	246
SCE-6PBXI	A1	8	95.31	46	SCE-72EL3612LP	E3	222	799.62	71
SCE-7230SOF19	P2	63	389.92	121	SCE-72EL3612SS6LP	S7	222	3,933.64	220
SCE-723618FS	A2	324	1,372.44	108	SCE-72EL3612SSLP	S5	257	3,278.03	218
SCE-723624FS	A2	363	1,514.33	108	SCE-72EL3616LP	E3	234	910.33	71
SCE-723624FSDA	A2	389	1,772.40	112	SCE-72EL3616SS6LP	S7	234	4,153.63	220
SCE-723630FS	A2	423	1,658.80	108	SCE-72EL3616SSLP	S5	234	3,461.27	218
SCE-723636FS	A2	468	1,800.69	108	SCE-72EL3618SS6FS	S7	354	6,415.09	246
SCE-723636FSDA	A2	478	2,104.44	112	SCE-72EL3618SSFS	S4	324	5,345.91	246
SCE-7236SOF19	P2	73	419.73	121	SCE-72EL3624FS	E2	363	1,559.76	108
SCE-724818FSD	A2	450	1,891.84	110	SCE-72EL3624SS6FS	S7	390	7,177.64	246
SCE-724818SSFSD	S2	450	8,170.24	250	SCE-72EL3624SSFS	S4	390	5,981.36	246
SCE-724824FSD	A2	494	2,049.50	110	SCE-72EL3630SS6FS	S7	362	7,940.18	246
SCE-724824FSDAD	A2	479	2,551.13	114	SCE-72EL3630SSFS	S4	362	6,616.82	246
SCE-724824SSFSD	S2	494	8,851.10	250	SCE-72EL3636SS6FS	S7	489	8,702.73	246
SCE-726010ULP	A2	540	1,972.44	106	SCE-72EL3636SSFS	S4	489	7,252.27	246
SCE-726012ULP	A2	490	2,033.21	106	SCE-72EL4818SS6FSD	S7	348	10,608.83	248
SCE-726016ULP	A2	520	2,152.21	106	SCE-72EL4818SSFSD	S4	348	8,840.69	248
SCE-726018FSD	A2	517	2,128.33	110	SCE-72EL4824SS6FSD	S7	523	11,425.87	248
SCE-726018SSFSD	S2	517	9,191.54	250	SCE-72EL4824SSFSD	S4	519	9,521.55	248
SCE-726024FSD	A2	573	2,302.70	110	SCE-72EL6012LPPL	E2	639	2,448.04	104
SCE-726024FSDAD	A2	545	2,866.42	114	SCE-72EL6012SS6LPPL	S7	639	10,685.17	242
SCE-726024SSFSD	S2	573	9,944.57	250	SCE-72EL6012SSLPPL	S4	639	8,904.31	242
SCE-726024ULP	A2	545	2,395.28	106	SCE-72EL6012SSST	S8	649	12,466.03	244
SCE-726036FSD	A2	700	2,649.05	110	SCE-72EL6018LPPL	E2	670	2,478.80	104
SCE-726036FSDAD	A2	674	3,298.78	114	SCE-72EL6018SS6FSD	S7	415	11,834.39	248
SCE-726036SSFSD	S2	698	11,440.38	250	SCE-72EL6018SS6LPPL	S7	670	10,913.21	242
SCE-727210ULP	A2	547	2,197.78	106	SCE-72EL6018SSFSD	S4	415	9,861.99	248
SCE-727212ULP	A2	557	2,263.61	106	SCE-72EL6018SSLPPL	S4	670	9,094.34	242
SCE-727216ULP	A2	570	2,395.28	106	SCE-72EL6018SSST	S8	682	12,732.08	244
SCE-727218FSD	A2	599	2,364.80	110	SCE-72EL6024SS6FSD	S7	560	12,738.03	248
SCE-727218SSFSD	S2	599	10,212.82	250	SCE-72EL6024SSFSD	S4	560	10,615.02	248
SCE-727224FSD	A2	663	2,555.90	110	SCE-72EL6036SS6FSD	S7	563	14,533.00	248
SCE-727224FSDAD	A2	628	3,181.73	114	SCE-72EL6036SSFSD	S4	563	12,110.83	248
SCE-727224SSFSD	S2	663	11,038.08	250	SCE-72EL7212LPPL	E2	720	2,743.30	104
SCE-727224ULP	A2	594	2,658.62	106	SCE-72EL7212SS6LPPL	S7	720	11,538.68	242
SCE-72EL2418FS	A2	258	1,135.10	108	SCE-72EL7212SSLPPL	S4	720	9,615.57	242
SCE-72EL2418SS6FS	S7	290	5,403.27	246	SCE-72EL7212SSST	S8	740	13,461.80	244
SCE-72EL2418SSFS	S4	290	4,502.73	246	SCE-72EL7218LPPL	E2	763	2,817.10	104
SCE-72EL2424FS	A2	305	1,261.50	108	SCE-72EL7218SS6FSD	S7	483	13,087.20	248
SCE-72EL2424FSDA	A2	318	1,476.21	112	SCE-72EL7218SS6LPPL	S7	763	12,401.96	242
SCE-72EL2424SS6FS	S7	250	5,819.73	246	SCE-72EL7218SSFSD	S4	483	10,906.00	248
SCE-72EL2424SSFS	S4	250	4,849.77	246	SCE-72EL7218SSLPPL	S4	763	10,334.97	242
SCE-72EL2430FSDA	A2	360	1,623.11	112	SCE-72EL7218SSST	S8	783	14,468.96	244
SCE-72EL2436FSDA	A2	401	1,772.40	112	SCE-72EL7224LPPL	E2	884	3,186.15	104
SCE-72EL3012LP	E3	217	749.18	71					
SCE-72EL3016LP	E3	236	856.21	71					

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-72EL7224SS6FSD	S7	658	14,077.51	248	SCE-72XEL6112SSST	S8	664	13,538.08	254
SCE-72EL7224SS6LPPL	S7	884	12,842.40	242	SCE-72XEL6118LP	A2	680	2,883.15	134
SCE-72EL7224SSFSD	S4	658	11,731.26	248	SCE-72XEL6118SS6LP	S7	680	13,073.05	252
SCE-72EL7224SSLPPL	S4	884	10,702.00	242	SCE-72XEL6118SSLP	S4	680	10,894.21	252
SCE-72EL7224SSST	S8	904	14,982.80	244	SCE-72XEL6118SSST	S8	702	14,707.18	254
SCE-72FP	P3	30	78.49	312	SCE-72XEL7312LP	A2	730	3,036.06	134
SCE-72FSCPS	P2	25	131.63	123	SCE-72XEL7312SS6LP	S7	730	13,366.23	252
SCE-72FSCS	P2	23	131.63	123	SCE-72XEL7312SSLP	S4	730	11,138.52	252
SCE-72FSHDPS	P2	23	124.18	123	SCE-72XEL7312SSST	S8	770	15,037.00	254
SCE-72H3012LP	A3	205	812.62	75	SCE-72XEL7318LP	A2	773	3,298.10	134
SCE-72H3016LP	A3	202	929.27	75	SCE-72XEL7318SS6LP	S7	773	13,849.87	252
SCE-72H3024LP	A3	247	1,020.81	75	SCE-72XEL7318SSLP	S4	773	11,571.56	252
SCE-72H3612LP	A3	222	867.81	75	SCE-72XEL7318SSST	S8	812	15,621.61	254
SCE-72H3616LP	A3	236	985.70	75	SCE-72XEL7324LP	A2	773	3,561.36	134
SCE-72P24F1	p3	46	196.20	120	SCE-72XEL7324SS6LP	S7	894	14,519.44	252
SCE-72P24F2	p3	23	126.66	120	SCE-72XEL7324SSLP	S4	894	12,099.53	252
SCE-72P30	P3	71	210.15	309	SCE-72XEL7324SSST	S8	1039	16,334.37	254
SCE-72P30F1	p3	59	228.49	120	SCE-72XM2818	A2	390	1,565.79	136
SCE-72P30F2	p3	30	141.56	120	SCE-72XM2818SS	S2	390	5,635.10	256
SCE-72P30GALV	P3	71	241.67	311	SCE-72XM3418	A2	460	1,735.38	136
SCE-72P36	P3	74	225.33	309	SCE-72XM3418SS	S2	460	6,245.44	256
SCE-72P36F1	p3	67	258.29	120	SCE-72XM3EQ18	A2	1279	4,116.91	138
SCE-72P36F2	p3	40	158.95	120	SCE-72XM3EQ18SS	S2	1279	14,816.33	258
SCE-72P36GALV	P3	74	259.13	311	SCE-72XM3EW18	A2	1450	4,634.06	138
SCE-72P48F1	p3	121	409.79	120	SCE-72XM3EW18SS	S2	1450	16,677.48	258
SCE-72P48F2	p3	73	260.78	120	SCE-72XM4018	A2	500	1,904.98	136
SCE-72P60	P3	149	394.98	309	SCE-72XM4018SS	S2	500	6,855.82	256
SCE-72P60F1	p3	154	474.36	120	SCE-72XM5418	A2	694	2,748.19	137
SCE-72P60F2	p3	87	295.55	120	SCE-72XM5418SS	S2	694	9,890.44	257
SCE-72P60GALV	P3	153	454.23	311	SCE-72XM6618	A2	798	3,096.93	137
SCE-72P72	P3	181	470.93	309	SCE-72XM6618G	A2	790	3,220.91	137
SCE-72P72F1	p3	180	541.42	120	SCE-72XM6618SS	S2	798	11,145.52	257
SCE-72P72F2	p3	103	327.83	120	SCE-72XM7818	A2	905	3,444.49	137
SCE-72P72GALV	P3	203	588.66	311	SCE-72XM7818SS	S2	905	12,396.34	257
SCE-72RA19TH	P2	17	114.24	122	SCE-72XM7824	A2	1015	3,691.72	137
SCE-72RA24TH	P2	20	114.24	122	SCE-72XM7824SS	S2	1015	13,286.12	257
SCE-72RP24F5	P2	20	124.18	122	SCE-76P37	P3	93	250.65	309
SCE-72RP24F6	P2	11	76.99	122	SCE-76P37GALV	P3	93	288.25	311
SCE-72RP30F5	P2	24	124.18	122	SCE-76P76	P3	194	498.78	309
SCE-72RP30F6	P2	13	76.99	122	SCE-76P76GALV	P3	223	623.48	311
SCE-72SMP14	P3	30	155.72	120	SCE-8064CHNFSS	S1	6	229.90	214
SCE-72SMP20	P3	41	192.53	120	SCE-8064CHNFSS6	S7	6	263.88	214
SCE-72SP24F3	P2	73	392.41	121	SCE-8065CHQRFQ	F1	4	*	270
SCE-72SP24F4	P3	41	279.03	121	SCE-8066CHNF	A1	7	62.66	66
SCE-72SP30F3	P2	87	454.50	121	SCE-8066ELJ	E1	5	61.48	58
SCE-72SP30F4	P2	46	300.51	121	SCE-8066ELJSS	S6	5	202.17	206
SCE-72SP36F3	P2	99	516.59	121	SCE-8066ELJSS6	S7	5	242.60	206
SCE-72SP36F4	P2	51	335.28	121	SCE-8066SC	A1	6	60.19	68
SCE-72X7312LP	A2	730	2,947.64	134	SCE-806CHNF	A1	6	53.27	66
SCE-72X7318LP	A2	773	3,202.04	134	SCE-806ELJ	E1	4	51.88	58
SCE-72X7324LP	A2	894	3,457.63	134	SCE-806ELJSS	S6	4	176.82	206
SCE-72XEL6112LP	A2	649	2,653.84	134	SCE-806ELJSS6	S7	5	212.18	206
SCE-72XEL6112SS6LP	S7	545	12,033.85	252	SCE-806FG	F1	4	*	268
SCE-72XEL6112SSLP	S4	545	10,028.21	252	SCE-806FW	F1	4	*	272
					SCE-806SC	A1	6	52.68	68
					SCE-806CHNF	A1	9	68.69	66

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-8086ELJ	E1	11	68.18	58
SCE-808CHNF	A1	7	59.78	66
SCE-808CHQRF	F1	4	*	270
SCE-808ELJ	E1	8	63.72	58
SCE-808FG	F1	4	*	268
SCE-808FW	F1	4	*	272
SCE-808SC	A1	7	60.19	68
SCE-82P37	P3	105	278.51	309
SCE-82P37GALV	P3	105	320.29	311
SCE-82P76	P3	210	501.32	309
SCE-82P76GALV	P3	236	626.65	311
SCE-84FP	P3	35	88.62	312
SCE-84XM3EW18	A2	1620	5,166.74	138
SCE-84XM3EW18G	A2	1442	5,475.55	138
SCE-84XM3EW18SS	S2	1620	18,594.54	258
SCE-84XM3EW24	A2	1535	5,227.65	138
SCE-84XM3EW24SS	S2	1705	18,813.76	258
SCE-84XM4018	A2	568	2,117.56	136
SCE-84XM4018G	A2	460	2,117.56	136
SCE-84XM4018SS	S2	568	7,620.90	256
SCE-84XM4024	A2	618	2,177.29	136
SCE-84XM4024SS	S2	618	7,835.81	256
SCE-84XM4EW18	A2	1850	6,983.19	139
SCE-84XM4EW24	A2	1950	7,057.72	139
SCE-84XM5EW18	A2	2411	8,340.83	139
SCE-84XM5EW24	A2	2500	8,595.45	139
SCE-84XM6EW24	A2	2880	10,474.79	139
SCE-84XM7818	A2	1090	3,823.10	137
SCE-84XM7818G	A2	1090	3,934.93	137
SCE-84XM7818SS	S2	1090	13,758.93	257
SCE-84XM7824	A2	1155	3,870.87	137
SCE-84XM7824SS	S2	1155	13,930.86	257
SCE-86M3E	A2	1510	4,868.15	124
SCE-86M3E20	A2	1590	5,379.02	124
SCE-86M4E	A2	1958	6,110.26	124
SCE-86M4E20	A2	2059	6,966.56	124
SCE-86M5E	A2	2475	7,651.45	124
SCE-86M5E20	A2	2590	8,449.43	124
SCE-8C12ELJ	A1	10	112.87	10
SCE-8C12ELJSS	S1	9	627.16	178
SCE-8C16ELJ	A1	15	125.41	10
SCE-8C16ELJSS	S1	10	708.62	178
SCE-8C20ELJ	A1	15	135.44	10
SCE-8C20ELJSS	S1	12	787.24	178
SCE-8C8ELJ	A1	8	102.84	10
SCE-8C8ELJSS	S1	6	586.80	178
SCE-8N6MP	N1	1	3.26	313
SCE-8N6MPP	N1	1	8.71	314
SCE-8N8MP	N1	1	3.82	313
SCE-8N8MPP	N1	1	9.83	314
SCE-8P12C	P3	2	8.39	10
SCE-8P16C	P3	5	11.50	10
SCE-8P20C	P3	3	14.63	10
SCE-8P6	P3	1	4.17	308
SCE-8P6AL	F2	1	*	312
SCE-8P6GALV	P3	1	4.17	310

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-8P6J	P3	1	4.17	315
SCE-8P8	P3	1	4.89	308
SCE-8P8AL	F2	1	*	312
SCE-8P8C	P3	1	5.27	10
SCE-8P8GALV	P3	1	4.89	310
SCE-8P8J	P3	3	4.89	315
SCE-8PB	A1	7	90.29	40
SCE-8PBA	A1	9	141.70	54
SCE-8PBAI	A1	9	141.70	56
SCE-8PBI	A1	8	90.29	42
SCE-8STS	C2	7	53.03	29
SCE-8VESTS	C2	7	60.33	29
SCE-903620FS	A2	400	1,640.75	108
SCE-903624FS	A2	436	1,754.25	108
SCE-903624FSDA	A2	456	2,049.50	112
SCE-903636FS	A2	559	2,087.04	108
SCE-903636FSDA	A2	563	2,438.85	112
SCE-9036SOF19	P2	84	442.08	121
SCE-904820FSD	A2	549	2,214.31	110
SCE-904820SSFSD	S2	549	9,562.88	250
SCE-907220FSD	A2	733	2,792.37	110
SCE-907220SSFSD	S2	732	12,059.34	250
SCE-907224FSD	A2	773	2,933.31	110
SCE-907224FSDAD	A2	743	3,653.50	114
SCE-907224SSFSD	S2	772	12,668.02	250
SCE-907236FSD	A2	940	3,360.88	110
SCE-907236SSFSD	S2	937	14,514.55	250
SCE-90EL2420FS	A2	330	1,351.80	108
SCE-90EL2420SS6FS	S7	278	6,390.00	246
SCE-90EL2420SSFS	S4	278	5,325.00	246
SCE-90EL3620SS6FS	S7	622	7,941.82	246
SCE-90EL3620SSFS	S4	622	6,618.18	246
SCE-90EL3624SS6FS	S7	490	8,625.82	246
SCE-90EL3624SSFS	S4	490	7,188.18	246
SCE-90EL3636SS6FS	S7	575	10,064.18	246
SCE-90EL3636SSFS	S4	575	8,386.82	246
SCE-90EL4820SS6FSD	S7	550	12,385.82	248
SCE-90EL4820SSFSD	S4	550	10,321.52	248
SCE-90EL7220SS6FSD	S7	296	15,384.84	248
SCE-90EL7220SSFSD	S4	296	12,820.70	248
SCE-90EL7224SS6FSD	S7	782	16,115.26	248
SCE-90EL7224SSFSD	S4	782	13,429.38	248
SCE-90EL7236SS6FSD	S7	764	18,331.10	248
SCE-90EL7236SSFSD	S4	764	15,275.91	248
SCE-90FP	P3	38	96.21	312
SCE-90FSCPS	P2	29	156.47	123
SCE-90FSCS	P2	29	156.47	123
SCE-90FSDPS	P2	29	136.60	123
SCE-90P24F1	p3	59	228.49	120
SCE-90P24F2	p3	33	141.56	120
SCE-90P36F1	p3	89	310.45	120
SCE-90P36F2	p3	46	183.79	120
SCE-90P48F1	P3	145	481.82	120
SCE-90P48F2	p3	75	298.03	120

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-90P72F1	P3	230	650.69	120	SCE-ASPBG-09	P2	1	3.63	301
SCE-90P72F2	p3	131	384.95	120	SCE-ASPBG-SS	P2	1	17.88	301
SCE-90RA19TH	P2	24	124.18	122	SCE-ASPB-SS	P2	1	19.13	301
SCE-90RP24F5	P2	27	166.40	122	SCE-AVK23	P2	1	16.64	284
SCE-90RP24F6	P2	14	94.38	122	SCE-AVK23SS	P2	1	41.60	284
SCE-90SMP14	p3	37	226.51	120	SCE-AVK33	P2	1	17.38	284
SCE-90SMP20	p3	58	235.00	120	SCE-AVK33SS	P2	1	43.46	284
SCE-90SMP30	p3	69	254.81	120	SCE-AVK34	P2	1	18.38	284
SCE-90SP36F3	P2	123	613.44	121	SCE-AVK34SS	P2	1	45.94	284
SCE-90SP36F4	P2	68	387.44	121	SCE-AVK43	P2	1	18.87	284
SCE-90XM3EW24	A2	2190	5,765.10	138	SCE-AVK43SS	P2	1	47.19	284
SCE-90XM3EW24SS	S2	2190	20,748.01	258	SCE-AVK44	P2	1	19.87	284
SCE-90XM4018	A2	620	2,268.06	136	SCE-AVK44SS	P2	1	49.67	284
SCE-90XM4018SS	S2	620	8,162.50	256	SCE-AVK64	P2	1	21.85	284
SCE-90XM4020SS	S2	640	8,450.48	256	SCE-AVK64SS	P2	1	54.63	284
SCE-90XM4024	A2	700	2,428.09	136	SCE-AVK66	P2	2	22.60	284
SCE-90XM4024SS	S2	700	8,738.46	256	SCE-AVK66SS	P2	2	55.88	284
SCE-90XM4EW18	A2	1940	7,253.97	139	SCE-AVK812	P2	3	34.77	284
SCE-90XM4EW24	A2	2030	7,427.87	139	SCE-AVK812SS	P2	3	86.93	284
SCE-90XM5EW18	A2	2350	8,713.45	139	SCE-AVK84	P2	2	23.34	284
SCE-90XM5EW24	A2	2450	9,005.36	139	SCE-AVK84SS	P2	2	57.13	284
SCE-90XM6EW24	A2	3000	10,859.84	139	SCE-AVK86	P2	2	26.33	284
SCE-90XM7818	A2	1140	4,082.27	137	SCE-AVK86SS	P2	2	58.36	284
SCE-90XM7818SS	S2	1140	14,691.64	257	SCE-AVK88	P2	3	29.31	284
SCE-90XM7820SS	S2	1150	14,777.60	257	SCE-AVK88SS	P2	3	65.82	284
SCE-90XM7824	A2	1210	4,284.12	137	SCE-BP115	P2	71	484.30	286
SCE-90XM7824SS	S2	1210	15,418.09	257	SCE-BP1805	P5	67	174.00	167
SCE-924B	C1	114	1,210.24	12	SCE-BP1806	P5	1	180.00	167
SCE-936B	C1	153	1,486.22	12	SCE-BP2005	P5	1	186.00	167
SCE-9P12L	P3	3	18.86	315	SCE-BP2006	P5	23	200.00	167
SCE-9P18L	P3	3	26.63	315	SCE-BP230	P2	31	484.30	286
SCE-9P24L	P3	4	29.14	315	SCE-BP72XM18	P2	28	239.58	319
SCE-9P30L	P3	4	31.92	315	SCE-BP72XM24	P2	38	260.66	319
SCE-9P36L	P3	6	34.97	315	SCE-BP84XM18	P2	100	254.10	319
SCE-9PB	A1	8	92.80	40	SCE-BP84XM24	P2	1	277.23	319
SCE-9PBA	A1	10	147.97	54	SCE-BP90XM18	P2	33	270.84	319
SCE-9PBAI	A1	10	147.97	56	SCE-BP90XM24	P2	44	294.94	319
SCE-9PBGX	A1	5	95.31	48	SCE-BPEX18	P2	2	91.48	319
SCE-9PBH	A1	13	142.99	50	SCE-BPEX24	P2	3	101.52	319
SCE-9PBHI	A1	10	142.99	52	SCE-BSW19SS	P2	1	20.43	327
SCE-9PBHSS	S1	14	287.73	202	SCE-BSW25SS	P2	1	21.69	327
SCE-9PBHSSI	S1	14	287.73	204	SCE-BSW31SS	P2	1	22.38	327
SCE-9PBI	A1	8	92.80	42	SCE-BSW38SS	P2	1	29.95	327
SCE-9PBSS	S1	8	308.12	198	SCE-BV4XKIT	F1	1	*	283
SCE-9PBSSI	S1	8	308.12	200	SCE-CAKR	P2	8	109.28	304
SCE-9PBX	A1	9	107.85	44	SCE-CAKR4	P2	9	163.91	304
SCE-9PBXI	A1	8	107.85	46	SCE-CAKS	P2	8	136.60	304
SCE-ABDCP	P2	1	42.22	302	SCE-CAKS4	P2	9	191.23	304
SCE-AHC15	P2	4	108.03	289	SCE-CBL15	P2	1	13.75	10
SCE-AHC30	P2	4	108.03	289	SCE-CBL20	P2	1	14.25	10
SCE-AHC50	P2	4	108.03	289	SCE-CDPK	P2	6	124.18	320
SCE-APH	P2	1	7.46	293	SCE-CF10	P2	12	161.43	288
SCE-ARK36	P2	4	115.23	292	SCE-CF10-230	P2	9	177.58	288
SCE-ASPB-09	P2	1	5.13	301	SCE-CF4	P2	3	60.84	288
					SCE-CF4-230	P2	2	66.95	288
					SCE-CF6	P2	5	153.98	288

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-CF6-230	P2	5	170.55	288
SCE-CN1032	P2	1	32.31	327
SCE-DCP	P2	1	42.22	302
SCE-DCPSS	P2	1	53.40	302
SCE-DF1806	P5	61	308.83	171
SCE-DF1808	P5	68	351.82	171
SCE-DF1809	P5	73	373.63	171
SCE-DF1810	P5	78	394.84	171
SCE-DF2006	P5	66	322.38	171
SCE-DF2008	P5	68	370.37	171
SCE-DF2009	P5	77	394.69	171
SCE-DF2010	P5	82	418.36	171
SCE-DF20EL16LP	P2	12	72.59	316
SCE-DF20EL20LP	P2	16	77.44	316
SCE-DF24EL20LP	P2	14	80.84	316
SCE-DF24EL24LP	P2	15	87.32	316
SCE-DF30EL20LP	P2	22	102.89	316
SCE-DF30EL24LP	P2	19	98.27	316
SCE-DF30EL30LP	P2	37	116.19	316
SCE-DF36EL20LP	P2	22	105.54	316
SCE-DF36EL24LP	P2	19	113.74	316
SCE-DF36EL30LP	P2	22	134.11	316
SCE-DF36EL36LP	P2	28	152.14	316
SCE-DF42EL24LP	P2	20	131.34	316
SCE-DF42EL30LP	P2	24	154.88	316
SCE-DF42EL36LP	P2	26	170.17	316
SCE-DF48EL24LP	P2	45	158.72	316
SCE-DF48EL36LP	P2	40	189.95	316
SCE-DF6048	P2	48	356.31	317
SCE-DF6060	P2	66	396.74	317
SCE-DF60EL36LP	P2	88	224.79	316
SCE-DF60EL48	P2	47	345.67	317
SCE-DF60EL60	P2	62	385.11	317
SCE-DF7260	P2	75	438.41	317
SCE-DF7272	P2	88	489.29	317
SCE-DF72EL36LP	P2	94	236.75	316
SCE-DF72EL60	P2	63	425.77	317
SCE-DF72EL72	P2	93	475.40	317
SCE-DFJ1008	P2	6	49.54	316
SCE-DFJ1210	P2	9	53.75	316
SCE-DFJ1212	P2	10	55.79	316
SCE-DFJ1412	P2	11	57.83	316
SCE-DFJ1614	P2	13	62.22	316
SCE-DFJ2016	P2	15	67.54	316
SCE-DISKPK	P2	5	124.18	320
SCE-DL5MDB	P2	1	12.91	290
SCE-DL5MDBB	P2	1	12.91	290
SCE-DL7SC	P2	1	17.38	290
SCE-DL7TE	P2	1	17.38	290
SCE-DL8SB	P2	1	12.91	290
SCE-DL8SC	P2	1	12.91	290
SCE-DLCA	P2	1	14.90	290
SCE-DLKLD	P2	1	27.32	290
SCE-DLKLDB	P2	1	27.99	290
SCE-DLKLDB-25	V1	3	543.12	290
SCE-DLSB	P2	1	17.38	290

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-DLSBB	P2	1	17.38	290
SCE-DLSSB	P2	1	42.22	290
SCE-DLWKC	P2	1	17.38	290
SCE-DLWKF	P2	1	17.38	290
SCE-DLWKF-25	V1	5	284.83	290
SCE-DRL-4K	P2	1	12.42	293
SCE-DRL-6	P2	1	7.46	293
SCE-DS12N4	P2	2	35.83	298
SCE-DS12SS	P2	2	81.96	298
SCE-DS16N4	P2	2	40.80	298
SCE-DS16SS	P2	2	89.41	298
SCE-DS20N4	P2	3	43.28	298
SCE-DS20SS	P2	3	96.86	298
SCE-DS24N4	P2	4	50.74	298
SCE-DS24SS	P2	3	104.31	298
SCE-DS30N4	P2	4	53.22	298
SCE-DS30SS	P2	4	116.72	298
SCE-DS36N4	P2	4	56.40	298
SCE-DS36SS	P2	4	129.14	298
SCE-DS42N4	P2	5	60.31	298
SCE-DS42SS	P2	5	141.56	298
SCE-DS48N4	P2	5	68.82	298
SCE-DS48SS	P2	5	158.95	298
SCE-DS60N4	P2	5	80.17	298
SCE-DS60SS	P2	5	181.31	298
SCE-DS72N4	P2	7	90.43	298
SCE-DS72SS	P2	7	216.07	298
SCE-DSTOPK	P2	2	67.05	296
SCE-DV4XKIT	F1	1	*	283
SCE-E115I	P2	5	144.68	302
SCE-EKDF	P2	1	36.21	302
SCE-ELFM12H	P2	3	51.20	307
SCE-ELFM12HSS	P2	3	122.88	307
SCE-ELFM12W	P2	3	47.10	307
SCE-ELFM12WSS	P2	3	113.04	307
SCE-ELFM16H	P2	3	54.47	307
SCE-ELFM16HSS	P2	3	130.73	307
SCE-ELFM16W	P2	3	50.33	307
SCE-ELFM16WSS	P2	3	120.79	307
SCE-ELFM20H	P2	3	56.85	307
SCE-ELFM20HSS	P2	4	136.44	307
SCE-ELFM20W	P2	4	52.75	307
SCE-ELFM20WSS	P2	4	126.60	307
SCE-ELFM24H	P2	4	60.89	307
SCE-ELFM24HSS	P2	4	146.14	307
SCE-ELFM24W	P2	4	56.79	307
SCE-ELFM24WSS	P2	4	136.60	307
SCE-ELFM30H	P2	5	64.95	307
SCE-ELFM30HSS	P2	5	155.88	307
SCE-ELFM30W	P2	5	60.85	307
SCE-ELFM30WSS	P2	5	146.04	307
SCE-ELFM36H	P2	6	70.16	307
SCE-ELFM36HSS	P2	6	168.38	307
SCE-ELFM36W	P2	6	66.10	307

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-ELFM36WSS	P2	6	158.64	307	SCE-FK1220	P2	42	196.20	306
SCE-ELFP	P2	1	9.94	293	SCE-FK1224	P2	43	201.17	306
SCE-ELJHINGE	P2	1	5.60	328	SCE-FK1224SS	P2	44	552.60	306
SCE-ELJMFK	P2	1	23.43	305	SCE-FK1224SS6	P2	44	663.12	306
SCE-ELJMFKSS	P2	1	46.86	305	SCE-FK1512	P2	42	178.81	306
SCE-ELKL	P2	1	62.09	292	SCE-FK1512SS	P2	43	536.45	306
SCE-ELKLT	P2	1	39.19	290	SCE-FK1512SS6	P2	43	643.74	306
SCE-ELMFK4	P2	2	17.69	305	SCE-FK1516	P2	43	186.27	306
SCE-ELMFK4-25	V1	13	307.85	305	SCE-FK1518	P2	45	202.77	306
SCE-ELMFK4SS	P2	2	26.05	305	SCE-FK1518SS	P2	47	584.89	306
SCE-ELMFK4SS-25	V1	13	448.36	305	SCE-FK1518SS6	P2	47	701.87	306
SCE-ELMFK4SS6-OS	P2	1	53.50	305	SCE-FK1524	P2	46	221.04	306
SCE-ELMFK6	P2	3	23.86	305	SCE-FK1524SS	P2	50	618.41	306
SCE-ELMFK6SS	P2	3	31.02	305	SCE-FK1524SS6	P2	50	742.09	306
SCE-ELPL	P2	1	62.09	292	SCE-FK1808	P2	31	168.89	306
SCE-ELSP	P2	6	45.00	318	SCE-FK1810	P2	35	178.81	306
SCE-ELSP3	P2	7	56.00	318	SCE-FK1812	P2	37	186.27	306
SCE-EMG	P5	2	26.74	169	SCE-FK1816	P2	45	206.14	306
SCE-EMIG	P2	3	119.22	326	SCE-FK1824	P2	47	260.78	306
SCE-EP1805	P5	37	225.83	166	SCE-FK2410SS	P2	45	581.16	306
SCE-EP1806	P5	44	249.45	166	SCE-FK2412	P2	49	196.93	306
SCE-EP2005	P5	41	238.94	166	SCE-FK2412SS	P2	49	608.48	306
SCE-EP2006	P5	49	265.23	166	SCE-FK2412SS6	P2	49	730.18	306
SCE-EXD18	P2	110	606.55	324	SCE-FLT33	P2	1	22.35	284
SCE-EYE50	P2	2	24.84	304	SCE-FLT34	P2	1	22.35	284
SCE-EYE63	P2	2	28.56	304	SCE-FLT43	P2	1	22.35	284
SCE-EYE75	P2	2	32.29	304	SCE-FLT44	P2	1	22.35	284
SCE-FA1010	P2	13	347.70	285	SCE-FLT64	P2	1	24.84	284
SCE-FA1010-230	P2	13	382.46	285	SCE-FLT66	P2	2	24.84	284
SCE-FA44	P2	3	146.53	285	SCE-FLT812	P2	2	29.80	284
SCE-FA44-230	P2	3	161.18	285	SCE-FLT84	P2	2	27.32	284
SCE-FA66	P2	4	260.78	285	SCE-FLT86	P2	2	27.32	284
SCE-FA66-230	P2	4	286.85	285	SCE-FLT88	P2	2	27.32	284
SCE-FGA1010	P2	2	91.89	285	SCE-FMA	P5	8	36.00	171
SCE-FGA44	P2	3	67.05	285	SCE-FMG	P5	6	26.21	169
SCE-FGA66	P2	4	69.54	285	SCE-FMG05	P5	8	28.74	169
SCE-FGABP	P2	3	101.89	286	SCE-FMG06	P5	9	33.54	169
SCE-FK0608	P2	15	111.76	306	SCE-FMG08	P5	7	42.86	169
SCE-FK0610	P2	17	116.72	306	SCE-FMG09	P5	7	47.39	169
SCE-FK0612	P2	19	131.63	306	SCE-FMG10	P5	12	51.92	169
SCE-FK0618	P2	30	153.98	306	SCE-FP18G	P5	16	97.10	168
SCE-FK0624	P2	33	178.81	306	SCE-FP20G	P5	18	104.66	168
SCE-FK1208	P2	23	139.08	306	SCE-FS1212	P2	11	146.53	299
SCE-FK1208SS	P2	24	379.99	306	SCE-FS1212SS	P2	10	418.00	299
SCE-FK1210	P2	27	146.53	306	SCE-FS1818	P2	17	183.79	299
SCE-FK1210SS	P2	27	409.79	306	SCE-FS1818SS	P2	17	476.22	299
SCE-FK1212	P2	29	153.98	306	SCE-FS2424	P2	25	221.04	299
SCE-FK1212SS	P2	30	437.11	306	SCE-FS2424SS	P2	28	496.72	299
SCE-FK1212SS6	P2	30	524.53	306	SCE-FSH2	P2	3	63.34	292
SCE-FK1216	P2	34	178.81	306	SCE-FSH4	P2	3	63.34	292
SCE-FK1216SS	P2	36	496.72	306	SCE-FSH6	P2	3	81.96	292
SCE-FK1218	P2	41	186.27	306	SCE-FSH8	P2	3	72.03	292
SCE-FK1218SS	P2	42	524.03	306	SCE-FSPS4	P2	4	55.88	313
SCE-FK1218SS6	P2	42	628.84	306	SCE-FSPS6	P2	6	84.44	313
					SCE-FSPS8	P2	9	126.66	313
					SCE-GA14X1	P2	2	29.80	326

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-GA14X75	P2	2	28.56	326
SCE-GA18X75	P2	2	21.11	326
SCE-GARD10	P2	1	26.08	288
SCE-GARD4	P2	1	17.38	288
SCE-GARD6	P2	1	21.11	288
SCE-GB10	P2	2	86.93	296
SCE-GMA	P5	1	20.23	171
SCE-GS808	P2	1	33.92	296
SCE-HA1010	P6	9	247.95	322
SCE-HA1010SS	P6	9	566.45	322
SCE-HA1212	P6	14	268.92	322
SCE-HA1212SS	P6	14	592.52	322
SCE-HA1814	P6	18	318.22	322
SCE-HA1814SS	P6	18	811.61	322
SCE-HDWMK	P2	1	78.54	305
SCE-HF1251A	P1	4	167.86	289
SCE-HF1252A	P1	4	180.53	289
SCE-HF2001A	P1	4	186.86	289
SCE-HF2002A	P1	4	193.20	289
SCE-HF4001B	P1	4	218.54	289
SCE-HF4002B	P1	4	231.20	289
SCE-HF8001B	P1	4	281.88	289
SCE-HF8002B	P1	4	294.55	289
SCE-HMG175	P5	4	19.27	170
SCE-HMG225	P5	5	20.90	170
SCE-HMG300	P5	6	23.19	170
SCE-HMG400		1	26.45	170
SCE-HMG475	P5	8	28.75	170
SCE-HMG575	P5	16	32.75	170
SCE-HMG675	P5	18	35.93	170
SCE-HMG775	P5	35	38.97	170
SCE-HPSERIES1	F1	1	*	301
SCE-HPSERIES15	F1	1	*	301
SCE-HPSERIES2	F1	1	*	301
SCE-HPSERIES3	F1	1	*	301
SCE-HPSERIES4	F1	1	*	301
SCE-HWK1212	P6	9	310.45	322
SCE-HWK1212SS	P6	10	640.77	322
SCE-HWK1814	P6	15	360.12	322
SCE-HWK1814SS	P6	16	869.25	322
SCE-HWK2218	P6	16	434.63	322
SCE-HWK2218SS	P6	18	1,048.07	322
SCE-HWK2228	P6	24	496.72	322
SCE-HWK2228SS	P6	25	1,296.42	322
SCE-HWK2822	P6	24	496.72	322
SCE-HWK2822SS	P6	26	1,296.42	322
SCE-HYGRO	P2	1	188.42	283
SCE-IMSBK	P5	3	42.00	172
SCE-K333	P2	1	6.56	328
SCE-KBH	C2	35	247.74	34
SCE-KBS	P2	23	372.54	297
SCE-KBS32	P2	8	372.54	297
SCE-KC101	P2	1	6.56	328
SCE-KLWN	P2	1	34.77	290
SCE-KLWNB	P2	1	34.77	290
SCE-L9126ELJ	E1	9	178.78	62

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-L9126ELJSS	S6	9	646.71	210
SCE-L9126ELJW	E1	6	275.71	64
SCE-L9126ELJWSS	S6	6	933.54	212
SCE-L9186ELJ	E1	9	180.51	62
SCE-L9186ELJSS	S6	9	718.82	210
SCE-L9186ELJW	E1	9	278.67	64
SCE-L9186ELJWSS	S6	9	942.86	212
SCE-L9246ELJ	E1	11	185.82	62
SCE-L9246ELJSS	S6	11	724.61	210
SCE-L9246ELJW	E1	11	303.78	64
SCE-L9246ELJWSS	S6	11	1,028.89	212
SCE-L9306ELJ	E1	16	187.24	62
SCE-L9306ELJSS	S6	16	786.43	210
SCE-L9306ELJW	E1	16	306.94	64
SCE-L9306ELJWSS	S6	16	1,039.07	212
SCE-L9366ELJ	E1	20	191.12	62
SCE-L9366ELJSS	S6	20	844.61	210
SCE-L9366ELJW	E1	20	309.80	64
SCE-L9366ELJWSS	S6	20	1,049.68	212
SCE-LF18	P2	6	206.55	300
SCE-LF18NO	P2	6	185.90	300
SCE-LF24	P2	7	218.03	300
SCE-LF24NO	P2	7	196.72	300
SCE-LLB5	P2	1	26.55	304
SCE-LLB5SS	P2	1	39.86	304
SCE-LLB7	P2	2	30.32	304
SCE-LPCLAMP	P2	1	17.38	293
SCE-LPCLAMPSS	P2	1	21.87	293
SCE-LPD2	P2	1	37.25	304
SCE-LRA18	P5	13	110.32	168
SCE-LRA20	P5	15	116.96	168
SCE-LSA	P2	1	38.34	301
SCE-LSMB	P2	1	25.56	300
SCE-MDMI	P5	2	150.46	172
SCE-MDMI2	P5	3	81.14	172
SCE-MDV	P2	3	181.05	326
SCE-MINQ	P2	1	9.94	291
SCE-MINQ6MS	P2	1	34.19	291
SCE-MINQB	P2	1	9.94	291
SCE-MINQKLB	P2	1	49.52	291
SCE-MINQLB	P2	1	28.56	291
SCE-MINQPL	P2	1	8.52	291
SCE-MOD724018	A2	470	1,672.08	148
SCE-MOD727718	A2	900	3,042.00	148
SCE-MOD72EPT	P2	69	326.59	149
SCE-MOD72FEP	P2	69	288.09	149
SCE-MOD72FTPT	P2	51	238.42	149
SCE-MOD72X4018	A2	510	1,693.58	148
SCE-MOD72X7818	A2	915	3,063.50	148
SCE-MOD8424EPT	P2	89	391.16	149
SCE-MOD8424FEP	P2	73	342.74	149
SCE-MOD8424FTPT	P2	73	293.07	149
SCE-MOD844018	A2	540	1,859.60	148
SCE-MOD844018G	A2	414	1,909.60	148

Phone (989) 799-6871

Fax (989) 799-4524



PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-MOD844024	A2	580	2,030.39	148	SCE-P011605	P5	49	267.15	166
SCE-MOD847718	A2	1020	3,374.03	148	SCE-P011606	P5	52	275.26	166
SCE-MOD847718G	A2	920	3,632.84	148	SCE-P011805	P5	66	298.92	166
SCE-MOD847724	A2	1060	3,603.34	148	SCE-P011806	P5	1	307.03	166
SCE-MOD84EPT	P2	73	358.87	149	SCE-PCH5	P2	4	86.93	291
SCE-MOD84FEP	P2	89	311.69	149	SCE-PCH5-7SC	P2	1	86.93	291
SCE-MOD84FTPT	P2	60	262.02	149	SCE-PCH7	P2	4	99.34	291
SCE-MOD84X4018	A2	580	1,883.48	148	SCE-PCH7-7SC	P2	1	99.34	291
SCE-MOD84X4024	A2	650	2,054.27	148	SCE-PE22	C2	18	365.08	33
SCE-MOD84X7818	A2	1025	3,397.91	148	SCE-PE22SS	C2	28	912.72	33
SCE-MOD84X7818G	A2	779	3,509.74	148	SCE-PH5	P2	4	86.93	291
SCE-MOD84X7824	A2	1150	3,629.61	148	SCE-PH7	P2	4	99.34	291
SCE-MODGK	P2	5	79.47	149	SCE-PKH5	P2	4	86.93	291
SCE-MST10	P2	2	20.24	303	SCE-PKH7	P2	4	99.34	291
SCE-MST12	P2	2	21.30	303	SCE-PLHG	P2	1	17.38	290
SCE-MST16	P2	3	23.42	303	SCE-PLKJIC	P2	1	9.94	293
SCE-MST20	P2	4	25.56	303	SCE-PLWKB	P2	1	19.87	290
SCE-MST24	P2	4	27.69	303	SCE-PLWKB-50	V1	17	651.65	290
SCE-MST4	P2	1	17.04	303	SCE-PP101201	P2	1	24.84	320
SCE-MST6	P2	1	18.10	303	SCE-PP101203	P2	6	27.32	320
SCE-MST8	P2	2	19.17	303	SCE-PP7701	P2	4	22.35	320
SCE-N12FA1010	P2	6	375.08	286	SCE-PS1032CN	P2	2	36.02	327
SCE-N12FA1010-230	P2	6	413.11	286	SCE-PS1420	P2	2	46.94	172
SCE-N12FA44	P2	3	152.13	286	SCE-PS1420CN	P2	2	42.22	327
SCE-N12FA44-230	P2	2	191.80	286	SCE-PS3816CN	P2	2	42.22	327
SCE-N12FA44-24VDC	P2	1	324.59	286	SCE-PS51618CN	P5	2	48.97	172
SCE-N12FA66	P2	4	215.08	286	SCE-PSK24	C2	5	59.98	31
SCE-N12FA66-230	P2	4	342.30	286	SCE-PSK32	C2	7	63.90	31
SCE-N12FA66-24VDC	P2	3	401.31	286	SCE-PWK138NF	P2	4	151.50	321
SCE-N12FGA1010	P2	5	68.85	286	SCE-PWK138NFSS	P2	4	228.49	321
SCE-N12FGA44	P2	3	41.31	286	SCE-PWK1711NF	P2	6	208.62	321
SCE-N12FGA66	P2	4	55.08	286	SCE-PWK1711NFSS	P2	6	300.51	321
SCE-N3RMFK4	P2	1	26.00	305	SCE-PWK2315NF	P2	8	257.05	321
SCE-NADFK	P2	3	44.71	318	SCE-PWK2315NFSS	P2	8	388.68	321
SCE-NADFK-3	P2	1	55.89	318	SCE-PWK2919NF	P2	12	382.47	321
SCE-NADFKSS	P2	2	159.02	318	SCE-PWK2919NFSS	P2	12	576.19	321
SCE-NLTH	P2	2	24.84	290	SCE-PWK53NF	P2	2	99.34	321
SCE-NMST10	P2	1	18.10	303	SCE-PWK53NFSS	P2	2	149.01	321
SCE-NMST12	P2	2	19.17	303	SCE-PWK63NF	P2	2	109.28	321
SCE-NMST16	P2	2	21.30	303	SCE-PWK95NF	P2	3	119.22	321
SCE-NMST20	P2	2	23.42	303	SCE-PWK95NFSS	P2	3	180.06	321
SCE-NMST24	P2	3	25.56	303	SCE-QR1	P2	1	9.94	293
SCE-NMST6	P2	1	15.98	303	SCE-QR1SS	P2	1	19.87	293
SCE-NMST8	P2	1	17.04	303	SCE-QR2	P2	1	22.97	293
SCE-NR1032	P5	2	25.20	172	SCE-QRLP	P2	1	12.87	293
SCE-NR1420	P5	2	25.20	172	SCE-RF1010	P2	1	17.38	329
SCE-P010605	P5	26	166.64	166	SCE-RF44	P2	1	8.07	329
SCE-P010606	P5	28	174.75	166	SCE-RF517	P2	1	12.78	329
SCE-P010805	P5	30	182.67	166	SCE-RF66	P2	1	9.32	329
SCE-P010806	P5	33	190.78	166	SCE-RH1010	P2	9	47.93	287
SCE-P011005	P5	61	198.93	166	SCE-RH1010SS	P2	9	67.10	287
SCE-P011006	P5	37	206.70	166	SCE-RH10N12	P2	9	59.92	287
SCE-P011205	P5	40	235.05	166	SCE-RH10N12SS	P2	5	83.87	287
SCE-P011206	P5	42	243.45	166	SCE-RH44	P2	3	39.94	287
					SCE-RH44SS	P2	3	55.91	287
					SCE-RH4N12	P2	2	49.93	287

PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER	PART NUMBER	PRICE CODE	ESTIMATED SHIPPING WT.	LIST PRICE	PAGE NUMBER
SCE-RH4N12SS	P2	2	69.89	287	SCE-SSPH5	P2	2	173.86	292
SCE-RH66	P2	4	42.60	287	SCE-SSPKH5	P2	3	191.88	292
SCE-RH66SS	P2	4	59.64	287	SCE-STMMK	P2	1	37.28	30
SCE-RH6N12	P2	4	53.25	287	SCE-STWBTD	C2	18	155.47	33
SCE-RH6N12SS	P2	4	74.55	287	SCE-STWSPL	C2	3	32.91	30
SCE-S180605	I1	232	1,295.18	154	SCE-STWSPLSS	C2	4	114.00	30
SCE-S180606	I1	252	1,369.60	154	SCE-STWSSBTD	C2	16	462.20	33
SCE-S180805	I1	299	1,500.83	154	SCE-T181205	I1	405	1,898.23	156
SCE-S180806	I1	324	1,592.96	154	SCE-T181206	I1	433	2,004.13	156
SCE-S181005	I1	353	1,658.32	154	SCE-T181605	I1	522	2,217.42	156
SCE-S181006	I1	379	1,757.74	154	SCE-T181606	I1	552	2,328.65	156
SCE-S200605	I1	254	1,375.64	154	SCE-T201205	I1	436	2,014.20	156
SCE-S200606	I1	276	1,457.21	154	SCE-T201206	I1	467	2,127.40	156
SCE-S200805	I1	322	1,588.55	154	SCE-T201605	I1	562	2,367.49	156
SCE-S200806	I1	349	1,687.83	154	SCE-T201606	I1	594	2,486.21	156
SCE-S201005	I1	380	1,760.00	154	SCE-TD181605	I1	435	2,289.09	160
SCE-S201006	I1	409	1,866.38	154	SCE-TD181606	I1	464	2,394.99	160
SCE-SB18	C2	3	44.34	32	SCE-TD181805	I1	530	2,608.27	160
SCE-SD180805	I1	299	1,809.40	158	SCE-TD181806	I1	560	2,719.51	160
SCE-SD180806	I1	324	1,901.53	158	SCE-TD201605	I1	467	2,405.06	160
SCE-SD181005	I1	353	1,966.89	158	SCE-TD201606	I1	497	2,518.26	160
SCE-SD181006	I1	379	2,066.31	158	SCE-TD201805	I1	570	2,758.35	160
SCE-SD181205	I1	405	2,124.52	158	SCE-TD201806	I1	602	2,877.07	160
SCE-SD181206	I1	433	2,230.42	158	SCE-TEMD	P2	1	82.79	283
SCE-SD200805	I1	322	1,897.12	158	SCE-TEMG	P5	2	24.38	169
SCE-SD200806	I1	349	1,996.40	158	SCE-TEMNC	P2	1	32.55	283
SCE-SD201005	I1	380	2,068.57	158	SCE-TEMNO	P2	1	32.55	283
SCE-SD201006	I1	409	2,174.95	158	SCE-TU05	P2	1	45.16	328
SCE-SD201205	I1	405	2,294.38	158	SCE-TU09	P2	1	45.16	328
SCE-SD201206	I1	433	2,371.41	158	SCE-UA400V	P2	2	47.19	302
SCE-SDMI	P5	6	75.23	172	SCE-UAV	P2	2	47.19	302
SCE-SLT	P2	3	144.05	326	SCE-UHK13	P2	2	39.74	293
SCE-SP1806G	P5	73	252.06	167	SCE-URA18	P5	15	110.32	168
SCE-SP1808G	P5	82	311.26	167	SCE-URA20	P5	17	116.96	168
SCE-SP1809G	P5	91	340.09	167	SCE-VMG18	P5	54	81.19	170
SCE-SP1810G	P5	91	368.92	167	SCE-VMG20	P5	61	87.71	170
SCE-SP1812G	P5	113	478.73	167	SCE-VRMS24	P2	7	42.67	303
SCE-SP1816G	P5	149	594.01	167	SCE-VRMS36	P2	8	53.21	303
SCE-SP1818G	P5	149	651.70	167	SCE-WSBTD	C2	18	247.74	33
SCE-SP2006G	P5	167	273.49	167	SCE-WSCC	C2	23	286.86	34
SCE-SP2008G	P5	81	337.77	167	SCE-WSCCSS	C2	23	664.98	34
SCE-SP2009G	P5	91	370.01	167	SCE-WSSBTD	C2	18	365.08	33
SCE-SP2010G	P5	101	402.22	167	SCE-XMAIMF18	P2	3	38.34	304
SCE-SP2012G	P5	126	520.20	167	SCE-XMAIMF20	P2	3	42.60	304
SCE-SP2016G	P5	167	648.92	167	SCE-XMAIMF24	P2	4	51.12	304
SCE-SP2018G	P5	187	713.23	167	XR20-0416-012	P1	16	*	282
SCE-SPMP05	P5	4	28.74	168	XR29-0816-012	P1	26	*	282
SCE-SPMP06	P5	5	33.54	168	XR29-1816-012	P1	43	*	282
SCE-SSPCH5	P2	2	173.86	292	XR47-2416-012	P1	95	*	282

Phone (989) 799-6871

Fax (989) 799-4524



NOTES

NOTES

NOTES

NOTES

NOTES

NOTES

NOTES

NOTES