






17654 Fordtran Blvd.  
Industry, Texas 78944  
+1 (979) 357-2243  
www.tracww.com



# Yellow Jacket WASP

## Wellhead Automation & Safety Panel

- Smart System with 2.2" MonoLCD Multilanguage User Interface for Intuitive Shutdown Diagnostics and Simple Setup.
- Integrated Modbus Slave Communications for Remote Monitoring and Well Shutdown requests.
- Economical, Intelligent, Reliable & Powerful Platform easy to install.
- Real Time Clock for Event logging on 32 GB microSD card.
- Multiple Pressure Sensing options available.
- Single Pump with Optional Dual pump.
- Standard Hydraulic Ports for External ESD Stations and Thermal Fuse Loop.

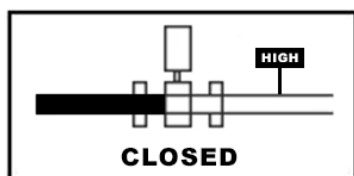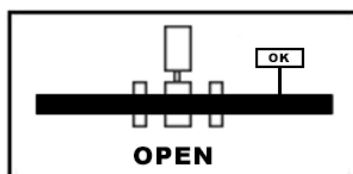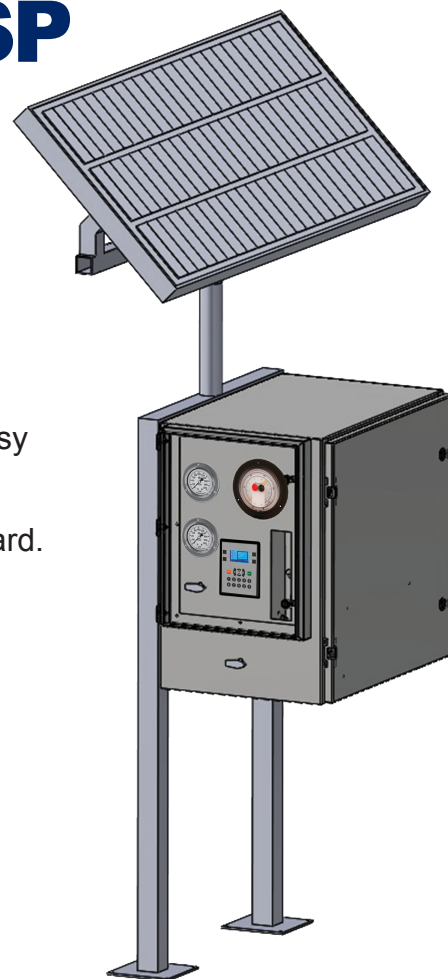

<b>BATTVOLT</b>	<b>: 24.1 V</b>
<b>SOLAR A</b>	<b>: 7.2 A</b>
<b>LOAD A</b>	<b>: 1.8 A</b>
<b>ACC AMP H</b>	<b>: 28 AH.</b>
<b>TEMP</b>	<b>: 26°C</b>

- Completely independent, Solar Powered System with minimum service required.
- Integrated Pressure Switch-Gauge with simple to adjust HI-LO Settings.
- Available Included External I/O: 8 DI, 4 Relay Out (3Amp), 4 AI, 2 AO.
- Expandable System with additional capacity for up to 1024 inputs/outputs.
- Two year limited warranty.
- Components rated to operate from -10°C to +60°C ambient temperature.
- Suitable for use in **Class I Div 2** Hazardous Areas.
- Easily accesible internal Hydraulic circuits.
- 24"x24"x16" Enclosure, SS316, Nema 4x with Safety Keylocking Door Latches.

## Pressure Switch Gauge Available Ranges (PSI)

0-30 0-60 0-100 0-160 0-200 0-300 0-500  
0-600 0-1,000 0-1,500 0-2,000 0-3,000 0-5,000  
- More available upon request -

## Typical Yellow Jacket Installation

